www.jbaconsulting.com

Level 2 Strategic Flood Risk Assessment - Site SHELAA/220

West of Rushenden Road, Queenborough

Final

Prepared for	Date
Swale Borough Council	October 2026

Contents

1 Background 4
1.1 Site details 4
1.2 Topography 4
1.3 Geology and soils 5

2 Sources of flood risk 6
2.1 Existing drainage features 6
2.2 Flood Zones 6
2.3 Fluvial present day defended risk 7
2.4 Tidal/coastal present day defended risk 7
2.5 Surface water present day risk 7
2.6 Reservoir 8
2.7 Groundwater 8
2.8 Sewers 9
2.9 Flood history 9

3 Climate change 10
3.1 Flood Zones plus climate change 10
3.2 Fluvial 10
3.3 Tidal 11
3.4 Surface water 11

4 Flood risk management infrastructure 13
4.1 Defences 13
4.2 MEAS Hold the Line Benefit Area 13
4.3 Residual risk 13

5 Coastal Change Management Area 13

6 Emergency planning 15
6.1 Flood warnings and alerts 15
6.2 Access and escape 15
6.3 Dry islands 15

7 Requirements for drainage control and impact mitigation 16

7.1 Assessment of possible SuDS constraints 16
7.2 Recommended approach to SuDS design 16

8 NPPF and planning implications 18
8.1 Exception Test requirements 18
8.2 Requirements and guidance for site-specific Flood Risk Assessment 18
8.3 Guidance for site design and making development safe 19

9 Conclusions 21

A Sources of information 23

B Flood Risk Mapping 24

1 Background

This is a Level 2 Strategic Flood Risk Assessment (SFRA) site screening report for site SHELAA/220. The content of this Level 2 SFRA site screening report assumes the reader has already consulted the Swale Borough Council Level 1 SFRA and read the Swale Borough Council Level 2 SFRA main report and is therefore familiar with the terminology used in this report.

1.1 Site details

- Location: West of Rushenden Road, Queenborough, ME11 5HL
- Site area: 10.56ha
- Existing site use: Formerly industrial with land raising, now greenfield
- Proposed site use: Residential
- Proposed use flood risk vulnerability classification: More Vulnerable

The site is situated between Queenborough and Rushenden and comprises greenfield land with ponds in the southwest and west of the site and a ditch along the southern boundary of the site. The site is bounded by Rushenden Road along the eastern boundary, unnamed road to the north, a residential area to the south and The Swale, a statutory Main River to the west. Beyond the unnamed road to the north there is more greenfield land and further to the east and southeast of the site there are commercial units.

1.2 Topography

Figure 1-1 shows the topography of the site represented by the Environment Agency (EA) 1m resolution LiDAR. This LiDAR dataset was flown in May 2023 and shows that much of the site is located on raised land having elevations between 4.2mAOD and 7.7mAOD, the higher elevation being in the north. There is also an area of raised land along the western boundary parallel to The Swale reaching 7.0mAOD. There are areas of lower elevation along the northern, eastern and southern boundaries as well as in the western area going down to elevations of 2.3mAOD.

Swale Borough Council has confirmed that land raising has been undertaken at the site, although the ground levels and date it occurred are unknown.

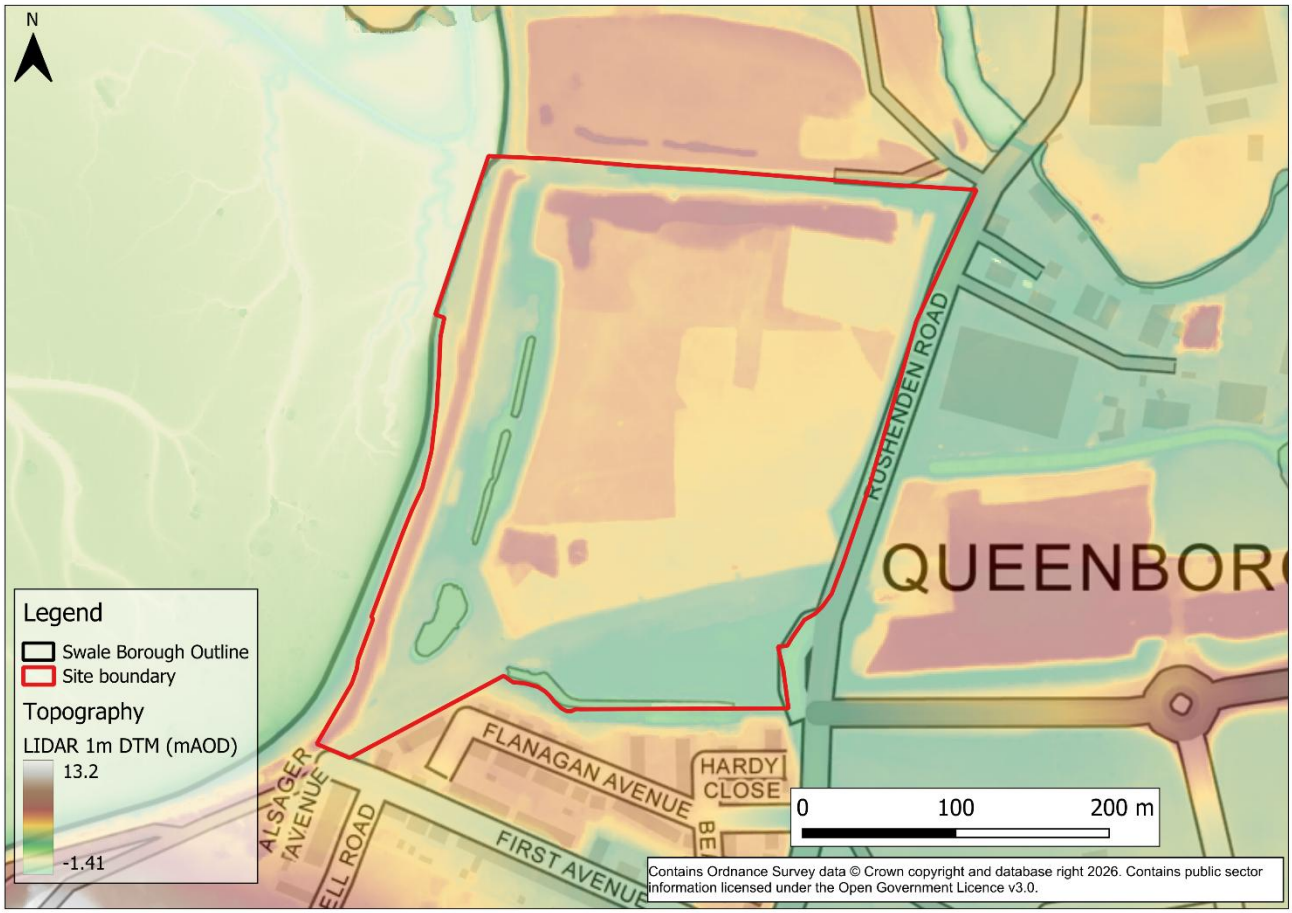


Figure 1-1: Topography of the site.

1.3 Geology and soils

Geology at the site consists of:

- Bedrock - London Clay Formation consisting of clay, silt and sand.
- Superficial - Alluvium consisting of clay, silt, sand and peat

Soils at the site consist of:

- Loamy and clayey soils of coastal flats with naturally high groundwater.

The potential influence of the site's geology and soil conditions on drainage is discussed in Section 7.

2 Sources of flood risk

2.1 Existing drainage features

There are three ponds in the southwest of the site, which may be connected, and a North Kent Marshes Water Level Management Board (WLMB) drainage ditch in the south. The drainage ditch appears to be culverted and connected to the central pond. The Swale, a statutory Main River, flows parallel to the western boundary and there are a series of ponds 300m east of the site.

The site is within the North Kent Marshes Water Level Management Board district.

2.2 Flood Zones

2.2.1 Available data

The Environment Agency's Flood Map for Planning (FMfP) has been used within this assessment to determine Flood Zones 2 and 3a. Flood Zones 2 and 3a do not consider defences.

The Environment Agency Rivers and Sea 3.3% AEP (1 in 30-year) defended flood risk extents - present day mapping and the 3.3% AEP (1 in 30-year) defended extent from North Kent Coastal model has been used to determine Flood Zone 3b in this area.

2.2.2 Description of risk to the site

The mapping shows that Flood Zone 3b covers nearly half of the site, present along the western boundary and within much of the centre of the site. However, the ground raising shown in Figure 1-1 does not appear to be included in the Environment Agency Rivers and Sea 3.3% AEP (1 in 30-year) defended flood risk extents - present day mapping used in the delineation of Flood Zone 3b and shows an overestimated fluvial risk in the centre of the site.

As such, a Flood Risk Assessment should incorporate the revised ground levels to ensure that the assessment accurately represents the fluvial risk and current site conditions. Due to the ground raising it is understood that only the western boundary of the site lies in Flood Zone 3b. Flood Zone 3a inundates nearly the entire site and Flood Zone 2 inundates the remainder of the site.

Table 2-1: Existing fluvial and tidal flood risk based on Flood Zones

Flood Zone 1 (%)	Flood Zone 2 (%)	Flood Zone 3a (%)	Flood Zone 3b (%)
0	8	88	4*

* Percentage does not include the fluvial extent as noted above.

2.3 Fluvial present day defended risk

It is understood that the fluvial flood risk in the centre of the site has been modelled in the Environment Agency Rivers and Sea 3.3% AEP (1 in 30-year) defended flood risk extents - present day mapping using generalised modelling and no detailed fluvial modelling is readily available. The Environment Agency's Flood Map for Planning – Surface Water Spatial Planning map has been used to inform the fluvial risk from the drainage ditches within this site summary sheet. See section 2.5 for more information.

However, a site-specific flood risk assessment with site-specific modelling will be required to represent accurate fluvial flood risk and updated ground levels to allow development to go ahead.

2.4 Tidal/coastal present day defended risk

2.4.1 Available data

The North Kent Coast coastal modelling study (2024) has been used to understand the coastal flood risk.

2.4.2 Description of risk to the site

According to the North Kent Coast model, the western boundary is predicted to flood in the 3.3% (1 in 30-year), 1% (1 in 100-year) and 0.1% AEP (1 in 1000-year) event but the raised land in the western area means the flooding does not impact the rest of the site.

Table 2-2: Existing tidal flood risk based on the North Kent Coast model*

<0.1% AEP (1 in 1000-year) (%)	0.1% AEP (1 in 1000-year) (%)	0.5% AEP (1 in 100-year) (%)	3.3% AEP (1 in 30-year) (%)
96	0	4	4

** The percentage of tidal extents quoted show the percentage of the site at risk from that particular event, including the percentage of the site at flood risk at a higher risk zone (e.g., 0.5% AEP (1 in 200-year) includes the 3.3% AEP (1 in 30-year) percentage). The <0.1% AEP (1 in 1000-year) event shows the area of the site not predicted to be impacted by tidal flooding.*

2.5 Surface water present day risk

2.5.1 Available data

The Environment Agency's Flood Map for Planning – Surface Water Spatial Planning map has been used within this assessment to inform the extent and depth of surface water risk. Velocity and hazard data is not currently available from the Environment Agency for this dataset.

2.5.2 Description of risk to the site

During the 3.3% (1 in 30-year) and 1% AEP (1 in 100-year) events, there is surface water ponding predicted in the south and southeast where the WLMB drainage ditch is situated and from a flow path from Rushenden Road. There is also ponding in the southwest and west where the ponds are present. Flooding is also predicted in the centre and north of the site. Maximum flood depths are predicted within the drainage ditch and ponds. Outside of these, the maximum depths are between 0.60m and 0.90m and between 0.90m and 1.20m respectively, in the southeastern area, north of the drainage ditch.

In the 0.1% AEP (1 in 1000-year) event a much larger proportion of the site is inundated, especially in the central and northern areas.There is also more extensive flooding in the southwest and southeast where the ponds and drainage ditches are present. The maximum depth is between 0.90m and 1.20m within the southeast of the site outside of the drainage ditches.

It appears that the modelling does not take the land raising into account so the risk may be overestimated.

Table 2-3: Existing surface water flood risk based on the Flood Map for Planning map

Event	<0.1% AEP (1 in 1000-year) (%)	0.1% AEP (1 in 1000-year) (%)	1% AEP (1 in 100-year) (%)	3.3% AEP (1 in 30-year) (%)
Percentage of site at risk* (%)	41	59	19	12
Maximum depth (m)	N/A	0.90-1.20	0.90-1.20	0.60-0.90

** The percentage of surface water extents quoted show the percentage of the site at surface water risk from that particular event, including the percentage of the site at flood risk at a higher risk zone (e.g., 1% AEP (1 in 100-year) includes the 3.3% AEP (1 in 30-year) percentage). The <0.1% AEP(1 in 1000-year) event shows the area of the site not predicted to be impacted by surface water flooding.*

2.6 Reservoir

The site is not shown to be at risk of reservoir flooding during the 'dry day' or 'wet day' scenarios within the EA's Reservoir Flood Maps, although the site boundary lies adjacent to The Swale where there is a risk.

2.7 Groundwater

The JBA Groundwater Emergence Map shows there is negligible risk to groundwater flooding during a 1% AEP (1 in 100-year) groundwater event.

This assessment does not negate the requirement that an appropriate assessment of the groundwater regime should be carried out at the site-specific Flood Risk Assessment (FRA) stage.

2.8 Sewers

Southern Water has not provided any additional information regarding the sewers at the site.

The Environment Agency has confirmed that all new developments should aim to connect to the existing mains drainage network. The use of private sewage treatment works, or NAVs should be avoided.

2.9 Flood history

According to the EA's Historic Flood Map, nearly the whole site flooded in 1978 due to overtopping of the sea defences.

The Kent County Council historic data was provided as point data with an easting and northing. Due to the protection of data, the eastings and northings were plotted on GIS and the number of incidents recorded within a 0.85km^2 area was calculated. Kent County Council's records indicate that the site lies across three areas that have had 6, 8 and 10 flood incidents respectively.

According to Southern Water's Sewer Incident Report Form (SIRF), there have been 4 sewer flood incidents in the ME11 5 postcode area since 2015.

3 Climate change

Increased storm intensities due to climate change may increase the extent, depth, velocity, hazard, and frequency of fluvial, tidal and surface water flooding.

Climate change allowances are determined by the management catchment in which the site is located. The site lies within the North Kent Management Catchment. Please see Section 6 of the Swale Borough Council Level 2 SFRA main report for information on climate change allowances.

Development proposals at the site must address the potential changes associated with climate change and be designed to be safe for the intended lifetime. The provisions for safe access and escape must also address the potential increase in severity and frequency of flooding.

3.1 Flood Zones plus climate change

3.1.1 Available data

The Environment Agency's Flood Map for Planning (FMfP) plus climate change has been used within this assessment. This shows the combined extent of Flood Zones 2 and 3 using the following climate change allowances:

- 'Central' allowance for the 2080s epoch (2070-2125) for risk of flooding from rivers
- 'Upper End' allowance for risk of flooding from the sea, accounting for cumulative sea level rise to 2125.

3.1.2 Description of risk to the site

Present day Flood Zones are included in Table 3-1 as a comparison to the Flood Zones plus climate change dataset. Both the Flood Zones and the Flood Zones plus climate change inundate the entire site due to the close proximity of The Swale and local ground levels.

Table 3-1: Flood Zones compared to Flood Zones plus climate change

Event	Flood Zones	Flood Zones plus climate change
Percentage of site at risk (%)	100	100

3.2 Fluvial

It is understood that there is no detailed fluvial climate change modelling readily available. The Environment Agency's Flood Map for Planning – Surface Water Spatial Planning map

has been used to inform the future fluvial risk from the drainage ditches within this site summary sheet. See section 2.5 for more information.

A site-specific flood risk assessment with site-specific modelling will be required to represent accurate fluvial flood risk and updated ground levels to allow development to go ahead.

3.3 Tidal

3.3.1 Available data

The North Kent Coast flood risk coastal modelling study (2024) has been used to understand the tidal and coastal flood risk within the Local Plan area. The mapping provides information for present day and for the Upper End climate change event for the years 2100 and 2125. Only the 2125 event has been assessed in this site summary sheet due to the likely lifetime of development (100-years) for residential sites.

3.3.2 Description of risk to the site

The defended 0.5% AEP (1 in 200-year) tidal event is predicted to be confined to the western area due to the embankment in the west of the site. However, in the defended 0.5% AEP (1 in 200-year) 2125 Upper End event, nearly the entire site is predicted to flood. The maximum flood depths are predicted along the boundaries with lower elevations and a danger for all hazard classification is predicted throughout the site except on the area of raised land and along the embankment.

It is likely that any Flood Risk Assessment prepared for the ground raising undertaken assessed an older version of the North Kent Coast model.

Table 3-2: Tidal flood risk to the site in the defended 0.5% AEP 2125 Upper End climate change event.

Event	0.5% AEP (1 in 200-year) 2125 UE
Percentage of site at risk (%)	100
Maximum depth (m)	2.71
Maximum velocity (m/s)	2.12
Maximum hazard classification	3.42 - Danger for all

3.4 Surface water

3.4.1 Available data

The Environment Agency's Surface Water Spatial Planning Dataset, released in May 2026, has been used within this assessment to inform the extent and depth of surface water risk with climate change. Climate change outputs are available for the 3.3% (1 in 30-year), 1% (1 in 100-year), and 0.1% AEP (1 in 1000-year) events with the Upper End climate change allowance for the 2070s epoch. There is currently no available velocity or hazard information to use within this assessment.

It should be noted that the Environment Agency's Upper End allowance for the 2050s epoch for the 1% AEP (1 in 100-year) event in the North Kent Management Catchment is greater than the 2070s epoch for the 1% AEP (1 in 100-year) event so the climate change uplift may be slightly underestimated.

3.4.2 Description of risk to the site

Surface water flooding in the 1% AEP (1 in 100-year) plus climate change event is predicted to increase compared to the 1% AEP (1 in 100-year) event, particularly in the north, centre and southeast, inundating the majority of the land on the area of raised land as well as more extensive flooding in the southeast where the drainage ditch is situated. The maximum flood depth is predicted to remain 1.20m in both events, in the southeast of the site.

It appears that the modelling does not take the land raising into account so the risk may be overestimated.

Table 3-3: Comparison of surface water flood risk to the site between the 1% AEP (1 in 100-year) present day and 1% AEP (1 in 100-year) climate change events

Event	1% AEP	1% AEP plus climate change
Percentage of site at risk (%)	19	47
Maximum depth (m)	0.90-1.20	0.90-1.20

4 Flood risk management infrastructure

4.1 Defences

The Environment Agency AIMS (Asset Information Management System) dataset shows the site is protected by an embankment which runs along the western boundary and a wall and engineered high ground to the northwest along The Swale with conditions (rated where 1 is good and 5 is bad) of 3, 2 and unknown respectively. The standard of protection of the three defences is for a 0.1% AEP (1 in 1000-year) event.

4.2 MEAS Hold the Line Benefit Area

The Medway Estuary and Swale flood and coastal risk management Strategy (MEAS) sets out the Environment Agency's plan to sustainably manage the coastline and tidal defences in the Medway estuary and Swale area. It aims to protect people, properties, designated habitat and agricultural land over the next 100 years.

The site is within a MEAS Hold the Line Benefit Area.

4.3 Residual risk

There is a risk of the defences to the west and northwest being breached by The Swale, which could cause extreme tidal flooding. There is breach modelling available for the North Kent Coast model for the 0.5% AEP (1 in 200-year) 2075 Upper End event which shows the site would be at risk of flooding, except the area of ground raising. However, for this site, as the proposed land use is residential development, the 2125 0.5% AEP (1 in 200-year) flood event should be assessed within a breach model as part of a detailed Flood Risk Assessment.

Also, blockages of the culverted drainage ditch and connected ponds within the site could put the site at risk of flooding. There is another culvert approximately 40m northeast which has potential to collapse. The build-up of debris could cause water levels to exceed the bank levels and flow overland may impact the site.

5 Coastal Change Management Area

A very small part of the western boundary is within the Coastal Change Management Area (CCMA). This has been defined by the North Kent Coast 2125 Upper End defended 3.3% AEP (1 in 30-year) flood extent zone.

The Local Plan's CCMA policy is set out under Policy C6. Permanent residential development will not be appropriate in this area. Development for other uses will only be appropriate subject to the criteria defined in Policy C6

A Coastal Change Vulnerability Assessment will need to accompany any planning application for the site. However, as the site is at risk of inundation only, this could largely be satisfied by the submission of a Flood Risk Assessment.

The implications of the site being located within the CCMA can be found within Appendix J of the Level 1 SFRA and Policy C6 of the Local Plan.

6 Emergency planning

6.1 Flood warnings and alerts

The site is located in the Environment Agency Sheerness, Minster and Queenborough Flood Warning Area and the Isle of Sheppey and coast from Kemsley to Seasalter Flood Alert Area.

6.2 Access and escape

Safe access and escape will need to be demonstrated in the 1% AEP (1 in 100-year) plus climate change fluvial and surface water events as well as the 0.5% AEP (1 in 200-year) plus climate change tidal event. Site drainage proposals should address the requirements for access routes, avoid impeding surface water flows and preserve the storage of surface water to avoid exacerbation of flood risk elsewhere on the site and in the wider catchment.

6.2.1 Current and potential access to the site

Access to the site could be through the unnamed road in the northeast corner of the site. Potential further access could be via Rushenden Road along the eastern boundary.

6.2.2 Fluvial

There are no detailed fluvial models available for the site so the risk has been informed by the surface water data assessed in Section 6.2.4.

6.2.3 Tidal

Safe access and escape is predicted to be impeded within and from the site via the both routes during the tidal 0.5% AEP (1 in 200-year) 2125 Upper End Climate change event due to very high flood depths (over 2.5m) and an extreme hazard classification being predicted along both roads.

6.2.4 Surface water

During the 1% AEP (1 in 100-year) surface water climate change event, there is flood free access and escape via both routes when travelling from the north. However, there is flooding predicted travelling from the south along Rushenden Road with flood depths between 0.30m and 0.60m which is likely to inhibit access and escape.

6.3 Dry islands

A dry island is a parcel of land that is elevated above surrounding areas at risk of flooding and is not at risk of flooding itself.

The site is not located on a dry island.

7 Requirements for drainage control and impact mitigation

7.1 Assessment of possible SuDS constraints

- The site is not considered to be susceptible to groundwater flooding, due to the nature of the local geological conditions. This should be confirmed through additional site investigation work.
- BGS data indicates that the underlying geology is clay, silt and sand and therefore permeability could be highly variable. As a result, permeability should be confirmed through infiltration testing. Off-site discharge may be required to discharge surface water runoff from the site. This would need to be in accordance with the SuDS hierarchy and national and local guidance.
- The site is not located within a Groundwater Source Protection Zone and there are no restrictions over the use of infiltration techniques with regard to groundwater quality.
- The topography slopes away from the centre of the site which will accelerate surface water runoff, increase erosion risks, and limit the space available for gravity-fed infiltration features like basins.
- The site is not located within a historic landfill site.

7.2 Recommended approach to SuDS design

- Implementation of SuDS at the site could provide opportunities to deliver multiple benefits including volume control, water quality, amenity and biodiversity. This could provide wider sustainability benefits to the site and surrounding area. Proposals to use SuDS techniques should be discussed with relevant stakeholders (Local Planning Authority, Lead Local Flood Authority, and the EA) at an early stage to understand possible constraints.
- Development at this site should not increase flood risk either on or off site. The design of the surface water management proposals should take into account the impacts of future climate change over the projected lifetime of the development.
- Opportunities to incorporate filtration techniques such as filter strips, filter drains and bioretention areas must be considered.
- Consideration should be made to the existing condition of receiving waterbodies for water quality. The use of multistage SuDS treatment will improve water quality of surface water runoff discharged from the site and reduce the impact on receiving water bodies.
- Opportunities to incorporate source control techniques such as green roofs, permeable surfaces and rainwater harvesting must be considered in the design of the site.
- The potential to utilise conveyance features such as swales to intercept and convey surface water runoff should be considered. Conveyance features should

be located on common land or public open space to facilitate ease of access. Where slopes are >5%, features should follow contours or utilise check dams to slow flows.

- Surface water discharge rates should not exceed the existing greenfield runoff rates for the site for the 50% AEP (1 in-2 year) and 1% AEP (1 in-100) year storm events. Opportunities to further reduce discharge rates should be considered and agreed with the LLFA. It may be possible to reduce site runoff by maximising the permeable surfaces on site using a combination of permeable surfacing and soft landscaping techniques.
- If it is proposed to discharge runoff to a watercourse or sewer system, the condition and capacity of the receiving watercourse or asset should be confirmed through surveys and the discharge rate agreed with the Lead Local Flood Authority alongside confirmation with the asset owner of the available capacity.
- The site is within the North Kent Marshes Water Level Management Board (WLMB) district who may have additional requirements regarding discharge rates (directly or indirectly) into their district. The WLMB should be consulted during the detailed design of the site to establish the Board's requirements, approval to discharge into WLMB watercourses (directly or indirectly) and ordinary watercourse consents.

8 NPPF and planning implications

8.1 Exception Test requirements

The Local Planning Authority has confirmed that the Sequential Test has been carried out in line with national guidelines. The Sequential Test needs to be passed before the Exception Test is applied. Annex F of the NPPF classifies residential development as "More vulnerable".

The Exception Test is required for this site because it is More vulnerable and located within Flood Zone 3a and more vulnerable development is not permitted in the areas within Flood Zone 3b.

It should be noted the mapping shows that Flood Zone 3b covers nearly half of the site, present along the western boundary and within much of the centre of the site. However, the ground raising shown in Figure 1-1 does not appear to be included in the Environment Agency Rivers and Sea 3.3% AEP (1 in 30-year) defended flood risk extents - present day mapping and shows an overestimated fluvial risk in the centre of the site.

As such, a Flood Risk Assessment should incorporate the revised ground levels to ensure that the assessment accurately represents the fluvial risk and current site conditions. Due to the ground raising it is understood that only the western boundary of the site lies in Flood Zone 3b.

8.2 Requirements and guidance for site-specific Flood Risk Assessment

At the planning application stage, a site-specific FRA will be required as the proposed development site is:

- in Flood Zones 2 or 3 or see flood map for planning
- within Flood Zone 3b
- within Flood Zone 1 with a site area of 1 hectare or more
- within 'Flood Zones plus Climate Change', showing it is at increased risk of flooding from rivers or sea in future - see flood map for planning
- within Flood Zone 1 and the flood map for planning shows it is at risk of flooding from surface water, now or in future

All sources of flooding should be considered as part of a site-specific FRA.

Consultation with the Local Authority, Lead Local Flood Authority, Southern Water, North Kent Marshes WLMB and the Environment Agency should be undertaken at an early stage.

Any FRA should be carried out in line with latest guidance including the National Planning Policy Framework (NPPF), Flood Risk and Coastal Change Planning Practice Guidance (PPG), and Swale Borough Council Local Plan Policies.

The development should be designed with mitigation measures in place where required as outlined in Section 8.3.

8.3 Guidance for site design and making development safe

- Residential development will need to be avoided within the small area of the CCMA on site. Development for other uses in the CCMA will only be appropriate subject to the criteria defined in Policy C6 of the Local Plan.
- A sequential approach should be applied within the site, locating development in the areas of lowest flood risk where possible. While tidal flood risk affects a significant proportion of the site, the layout should also take account of current and future fluvial and surface water flood risk. Development should be steered outside areas within Flood Zone 3b along the western boundary.
- Mitigation measures such as further land raising and/or the construction of private flood defences may be required for the development to be safe for its lifetime from tidal flooding, even though the site is within a MEAS Hold the Line Benefit Area. Where ground raising or flood defences are proposed as part of a development surface water and fluvial flow paths should be avoided to prevent detriment elsewhere. If flow paths cannot be avoided then site-specific hydraulic modelling will be needed to demonstrate that there is no impact on flood risk elsewhere.
- The residual risk at the site should be assessed and include breach modelling for the 2125 0.5% AEP (1 in 200-year) tidal event and the risk of a culvert collapse or blockage.
- Assuming the site can be made safe from tidal flooding
    - The ground raising shown in Figure 1-1 does not appear to be included in the Environment Agency Rivers and Sea 3.3% AEP (1 in 30-year) defended flood risk extents - present day mapping which has been used to prepare Flood Zone 3b and shows an overestimated fluvial risk in the centre of the site. It also does not appear to have been included in the Environment Agency's Flood Map for Planning – Surface Water Spatial Planning map. As such, a Flood Risk Assessment should incorporate the revised ground levels to ensure that the assessment accurately represents the fluvial and surface water risk and current site conditions. Where development cannot avoid areas at risk of flooding, then flood resilience and resistance measures e.g. raising of floor levels, including property flood resistance and resilience measures should be implemented, where appropriate. These measures should be assessed to make sure that flooding is not increased either on or off the site.
    - The risk from surface water flow routes should be quantified as part of a site-specific FRA, including a drainage strategy, so runoff volumes from the development are not increased by development. A drainage strategy should help inform site layout and design to ensure runoff rates are as close as possible to pre-development greenfield rates, with areas of surface water ponding retained as open space and SuDS or water compatible/essential infrastructure uses only.
    - A Flood Response Plan will be required in consultation with Swale Borough Council. Arrangements for safe access and escape will need to be provided

for the 1% AEP fluvial and surface water events, as well as the 0.5% AEP tidal events with an appropriate allowance for climate change, considering depth, velocity, and hazard. Design and access arrangements will need to incorporate mitigation measures, to ensure the development and occupants are safe. It may involve consideration of evacuation before the event or safe refuge on site.

- Provisions for safe access and escape should not impact on surface water flow routes or contribute to loss of floodplain storage. Consideration should be given to the siting of access points with respect to areas of surface water flood risk.
- The Environment Agency has confirmed that any flood risk activities carried out within 16 metres of the main river, or tidal defence would require a Flood Risk Activity Permit.
- The Environment Agency has confirmed that all new developments should aim to connect to the existing mains drainage network. The use of private sewage treatment works, or NAVs should be avoided.

9 Conclusions

The mapping shows that Flood Zone 3b covers nearly half of the site, present along the western boundary and within much of the centre of the site. However, the ground raising shown in Figure 1-1 does not appear to be included in the Environment Agency Rivers and Sea 3.3% AEP (1 in 30-year) defended flood risk extents - present day mapping used in the delineation of Flood Zone 3b and shows an overestimated fluvial risk in the centre of the site.

As such, a Flood Risk Assessment should incorporate the revised ground levels to ensure that the assessment accurately represents the fluvial risk and current site conditions. Due to the ground raising it is understood that only the western boundary of the site lies in Flood Zone 3b. Flood Zone 3a inundates nearly the entire site and Flood Zone 2 inundates the remainder of the site.

The site is protected from tidal flooding by an embankment which runs along the western boundary and a wall and engineered high ground to the northwest along the Swale.

According to the North Kent Coast model, the western boundary is predicted to flood in the defended 3.3% (1 in 30-year), 1% (1 in 100-year) and 0.1% AEP (1 in 1000-year) events. In the defended 0.5% AEP (1 in 200-year) 2125 Upper End event, nearly the entire site is predicted to flood.

In terms of surface water flood risk, during the 3.3% (1 in 30-year) and 1% AEP (1 in 100-year) events, there is surface water ponding predicted in the southeast and southwest. Flooding is also predicted in the centre and north of the site. In the 0.1% AEP (1 in 1000-year) event a much larger proportion of the site is inundated, especially in the central and northern areas on the raised land. The 1% AEP (1 in 100-year) plus climate change event is predicted to inundate the majority of the land on the raised land as well as more extensive flooding in the southeast. It appears that the modelling does not take the land raising into account so the risk may be overestimated.

Reservoir flood mapping shows that a small area in the northwest of the site is affected by the Dry Day and Wet Day flood extents.

According to the Environment Agency's Historic Flood Map, nearly the whole site flooded in 1978 due to overtopping of the sea defences.

Kent County Council's records indicate that the site is within three areas that have had 6, 8 and 10 flood incidents respectively.

There have been 4 sewer flood incidents in the ME11 5 postcode area since 2015 according to Southern Water's SIRF dataset.

The following points should be considered in development of this site:


- Residential development will need to be avoided within the small area of the CCMA on site. Development for other uses in the CCMA will only be appropriate subject to the criteria defined in Policy C6 of the Local Plan

- A site-specific Flood Risk Assessment will be required which demonstrates that development can be safely accommodated on the site for its lifetime. A sequential approach should be applied within the site, locating development in the areas of lowest flood risk where possible. Development should be steered outside of the areas within Flood Zone 3b and outside the areas of surface water flood risk on site. Where development cannot avoid areas at risk of flooding, then flood resilience and resistance measures e.g. raising of floor levels, including property flood resistance and resilience measures should be implemented, where appropriate. These measures should be assessed to make sure that flooding is not increased either on or off the site.
- Detailed fluvial modelling should be undertaken to assess the current site conditions, risk and extent of Flood Zone 3b. Detailed surface water modelling should also be undertaken taking account of the ground raising.
- The residual risk should be assessed and include breach modelling for the 2125 0.5% AEP (1 in 200-year) event and assess the risk of culvert blockage or build-up of debris in the drainage ditch.
- SuDS should be incorporated throughout the site to manage runoff, provide climate change resilience and deliver wider water quality, biodiversity and amenity benefits.
- A Flood Response Plan will be required in consultation with Swale Borough Council. Arrangements for safe access and escape will need to be provided for the 1% AEP surface water and fluvial events and 0.5% AEP tidal event with an appropriate allowance for climate change, considering depth, velocity, and hazard. Design and access arrangements will need to incorporate mitigation measures, to ensure the development and occupants are safe. It may involve consideration of evacuation before the event or safe refuge on site.


A Sources of information

- National Planning Policy Framework (NPPF) https://www.gov.uk/guidance/national-planning-policy-framework
- Planning Practice Guidance (PPG), Flood Risk and Coastal Change https://www.gov.uk/guidance/flood-risk-and-coastal-change
- Swale Borough Local Plan https://services.swale.gov.uk/media/files/localplan/adoptedlocalplanfinalwebversion.pdf
- Swale Borough Council Sequential and Exception Tests for Planning Applications https://swale.gov.uk/planning-and-regeneration/local-plans/local-plan-review-evidence/flood-risk#h2
- Swale Borough Council Level 1 SFRA
- https://swale.gov.uk/planning-and-regeneration/local-plans/local-plan-review-evidence/flood-risk#h2
- Kent County Council Local Flood Risk Management Strategy https://www.kent.gov.uk/__data/assets/pdf_file/0016/205621/Local-Flood-Risk-Management-Strategy-2024-2034.pdf
- Flood risk assessments: applying for planning permission https://www.gov.uk/guidance/flood-risk-assessments-applying-for-planning-permission
- Kent County Council's Drainage and Planning Policy Statement https://www.kent.gov.uk/about-the-council/strategies-and-policies/service-specific-policies/economic-regeneration-and-planning-policies/planning-policies/flooding-drainage-and-water-management-policies-and-guidance
- Defra's National standards for sustainable drainage systems (SuDS) https://www.gov.uk/government/publications/national-standards-for-sustainable-drainage-systems/national-standards-for-sustainable-drainage-systems-suds
- Flood Map for Planning - Flood Zones dataset https://environment.data.gov.uk/dataset/04532375-a198-476e-985e-0579a0a11b47
- Flood Map for Planning - Flood Zones plus Climate Change https://environment.data.gov.uk/dataset/59065c43-257e-4867-8798-fd2366156a6b
- British Geological Survey (BGS) Geology Viewer https://geologyviewer.bgs.ac.uk/
- Flood Warning sign up https://www.gov.uk/sign-up-for-flood-warnings

B Flood Risk Mapping

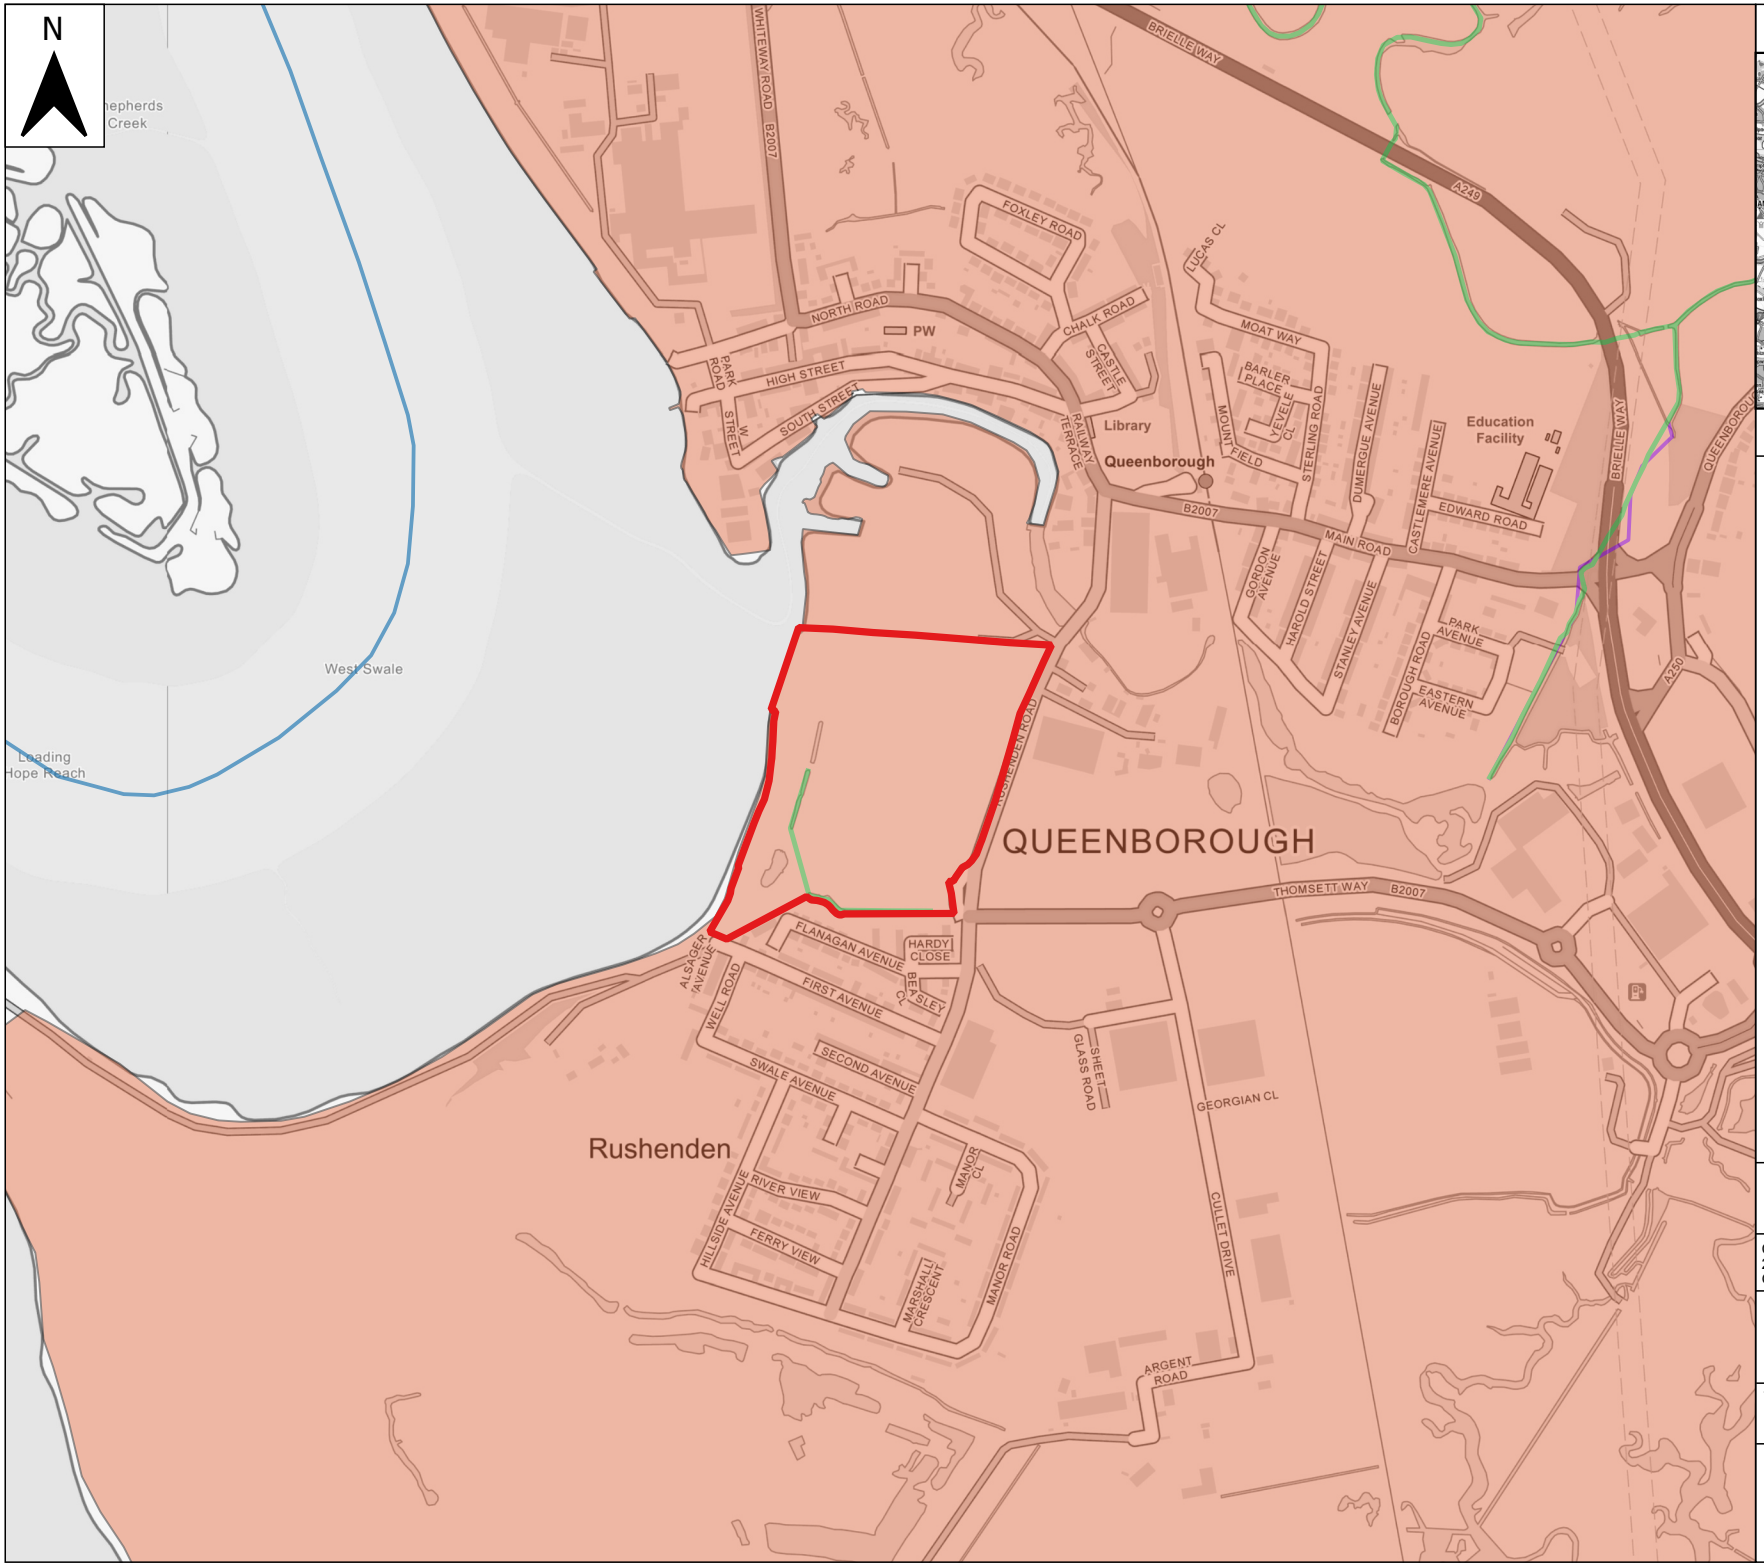

Location Plan

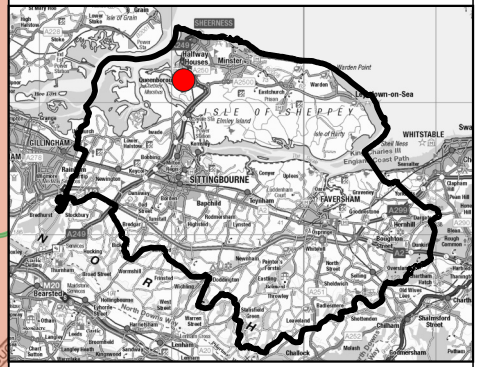

Legend

- Swale Borough Outline
- Site boundary

Watercourses

- Statutory Main Rivers
- Ordinary watercourses
- North Kent Marshes Water Level Management Board Watercourses
- North Kent Marshes Water Level Management Board

0 200 400 m


Contains Ordnance Survey data © Crown copyright and database right 2026. Contains public sector information licensed under the Open Government Licence v3.0.

SWALE BOROUGH COUNCIL
LEVEL 2 SFRA:
WATERCOURSES - SHELAA-220


This document is the property of Jeremy Benn Associates Ltd. It shall not be reproduced in whole or in part, nor disclosed to a third party, without the permission of Jeremy Benn Associates Ltd.

JBA consulting

Swale BOROUGH COUNCIL
Making Swale a better place

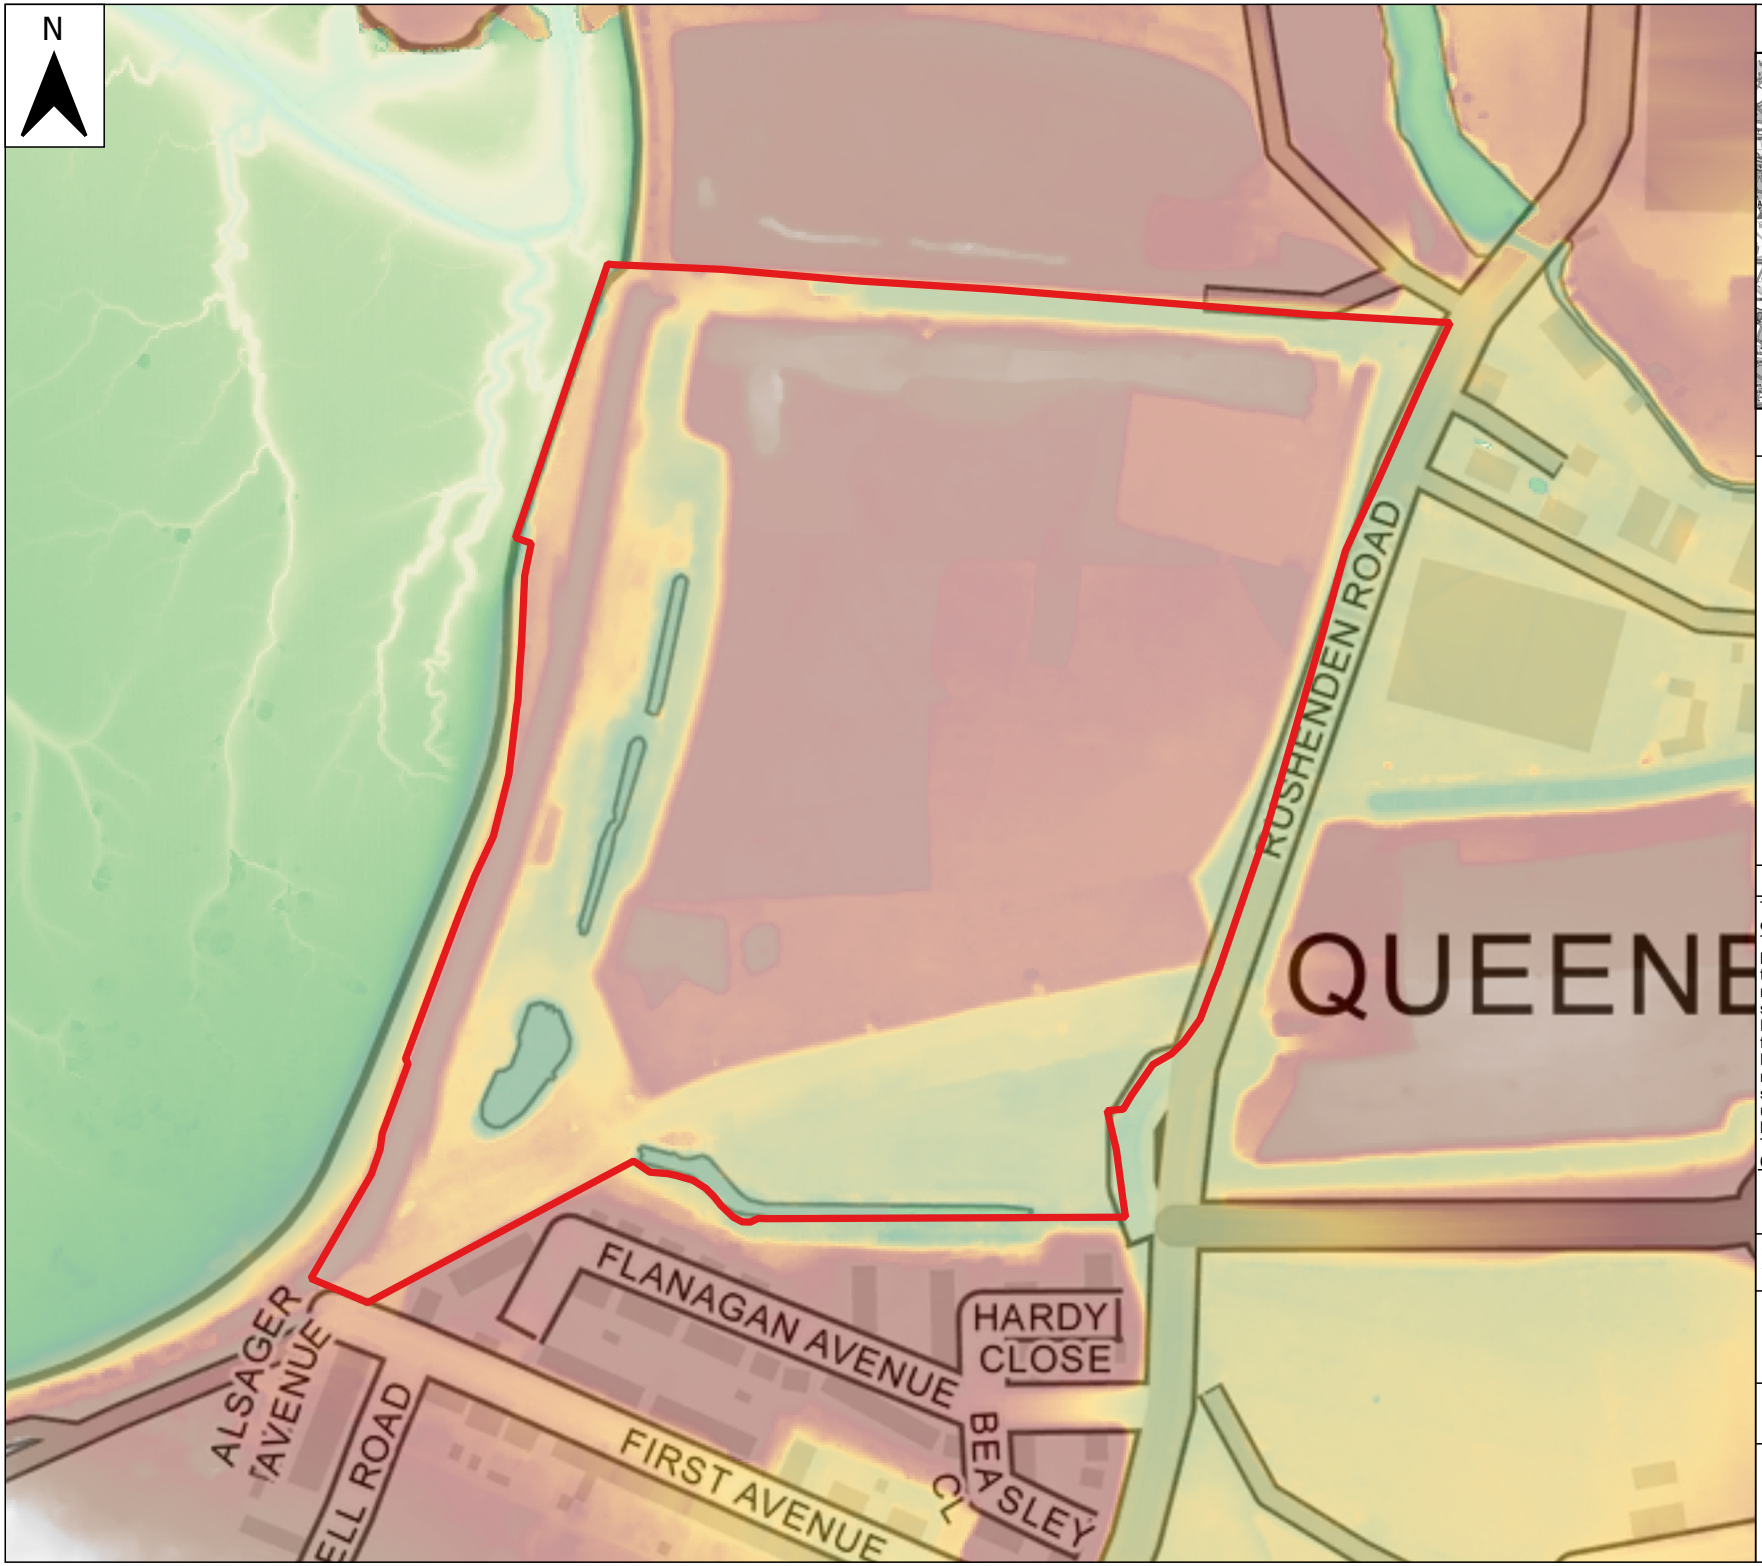

Location Plan

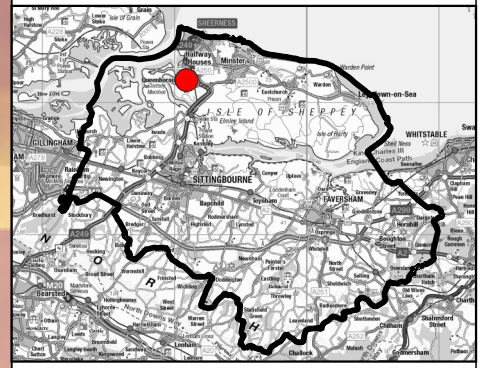

Legend

Swale Borough Outline

Site boundary

Topography

LIDAR 1m DTM (mAOD)

9.86

-1.43

Notes

The LIDAR Composite DTM (Digital Terrain Model) is a raster elevation model covering ~99% of England at 1m spatial resolution. The DTM (Digital Terrain Model) is produced from the last or only laser pulse returned to the sensor. We remove surface objects from the Digital Surface Model (DSM), using bespoke algorithms and manual editing of the data, to produce a terrain model of just the surface.

Produced by the Environment Agency in 2022, the DTM is derived from a combination of the EA's Time Stamped archive and National LIDAR Programme surveys, which have been merged and re-sampled to give the best possible coverage. Where repeat surveys have been undertaken the newest, best resolution data is used. Where data was resampled a bilinear interpolation was used before being merged.

The 2025 LIDAR Composite contains surveys undertaken between 6th June 2000 and 1st August 2025.

0 70 140 m


Contains Ordnance Survey data © Crown copyright and database right 2026. Contains public sector information licensed under the Open Government Licence v3.0.

SWALE BOROUGH COUNCIL
LEVEL 2 SFRA:
TOPOGRAPHY - SHELAA-220


This document is the property of Jeremy Benn Associates Ltd. It shall not be reproduced in whole or in part, nor disclosed to a third party, without the permission of Jeremy Benn Associates Ltd.

JBA consulting

Swale BOROUGH COUNCIL
Making Swale a better place

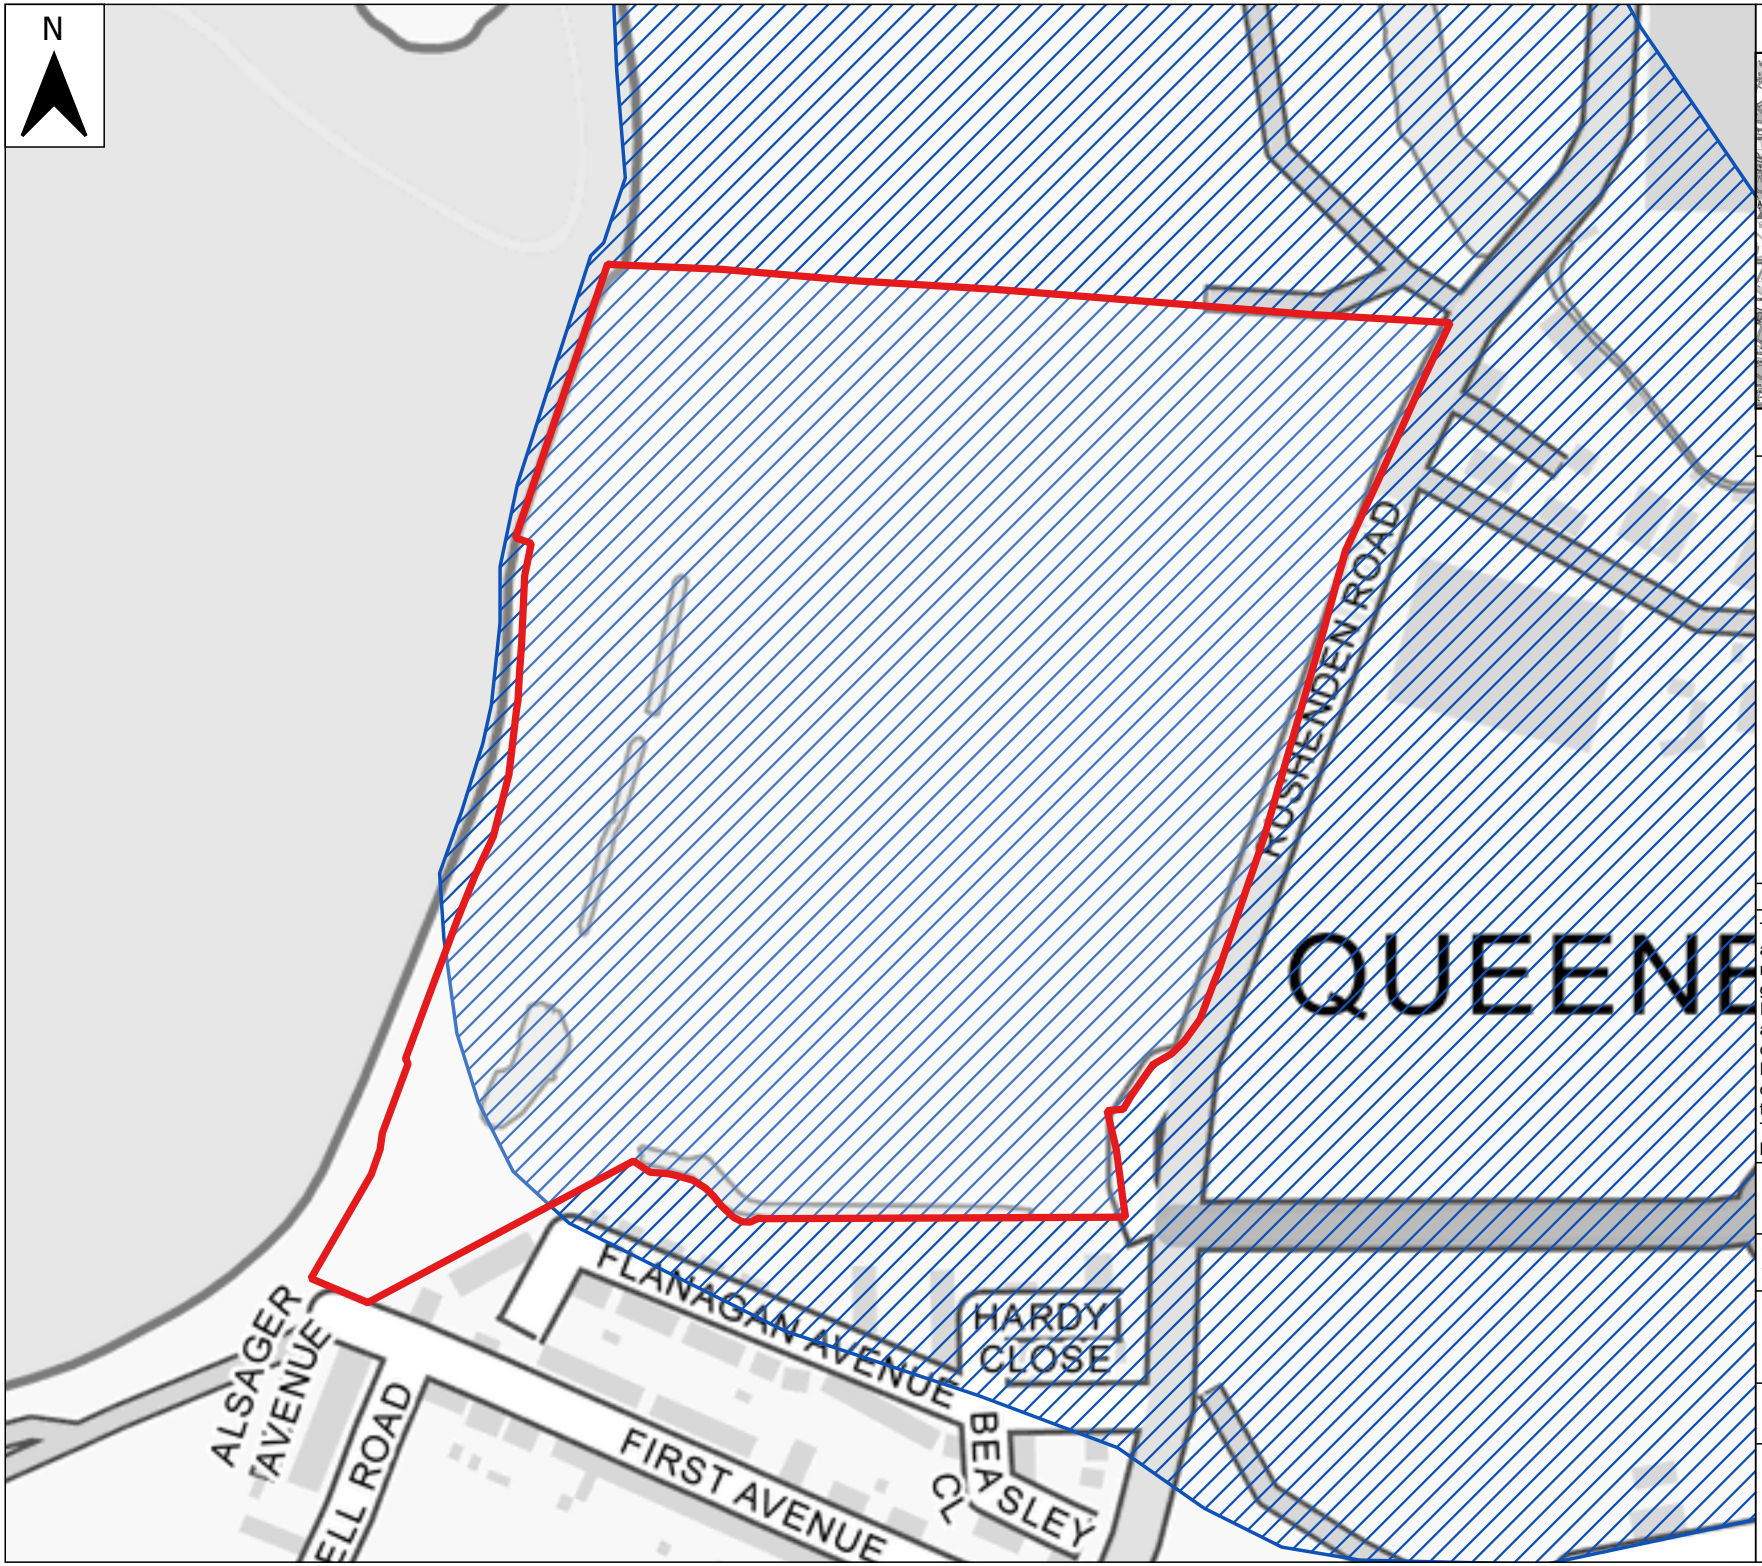

Location Plan

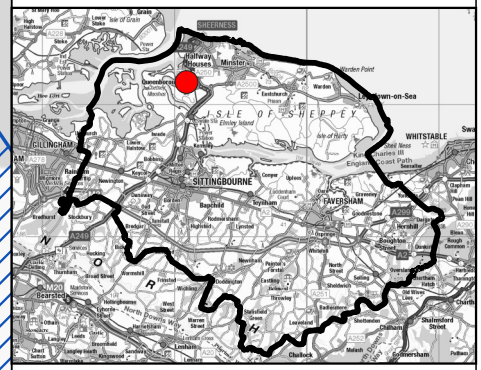

Legend

- Swale Borough Outline
- Site boundary

Environment Agency recorded flood outlines

- Main Rivers
- Sea

Notes

The Historic Flood Map shows the recorded flood outlines available from the Environment Agency. The dataset records historical flooding from rivers, the sea, groundwater and surface water.
It is possible that the pattern of flooding has changed and area would now flood or not flood under different circumstances.
Please note that not all historical records may be shown on this map, and that it is therefore advised you contact the Environment Agency for updated information.
The map does not include recorded incidents of flooding held by Kent County Council or Southern Water.

0 70 140 m


Contains Ordnance Survey data © Crown copyright and database right 2026. Contains public sector information licensed under the Open Government Licence v3.0.

SWALE BOROUGH COUNCIL
LEVEL 2 SFRA:
HISTORIC FLOODING - SHELAA-220


This document is the property of Jeremy Benn Associates Ltd. It shall not be reproduced in whole or in part, nor disclosed to a third party, without the permission of Jeremy Benn Associates Ltd.

JBA consulting

Swale BOROUGH COUNCIL
Making Swale a better place

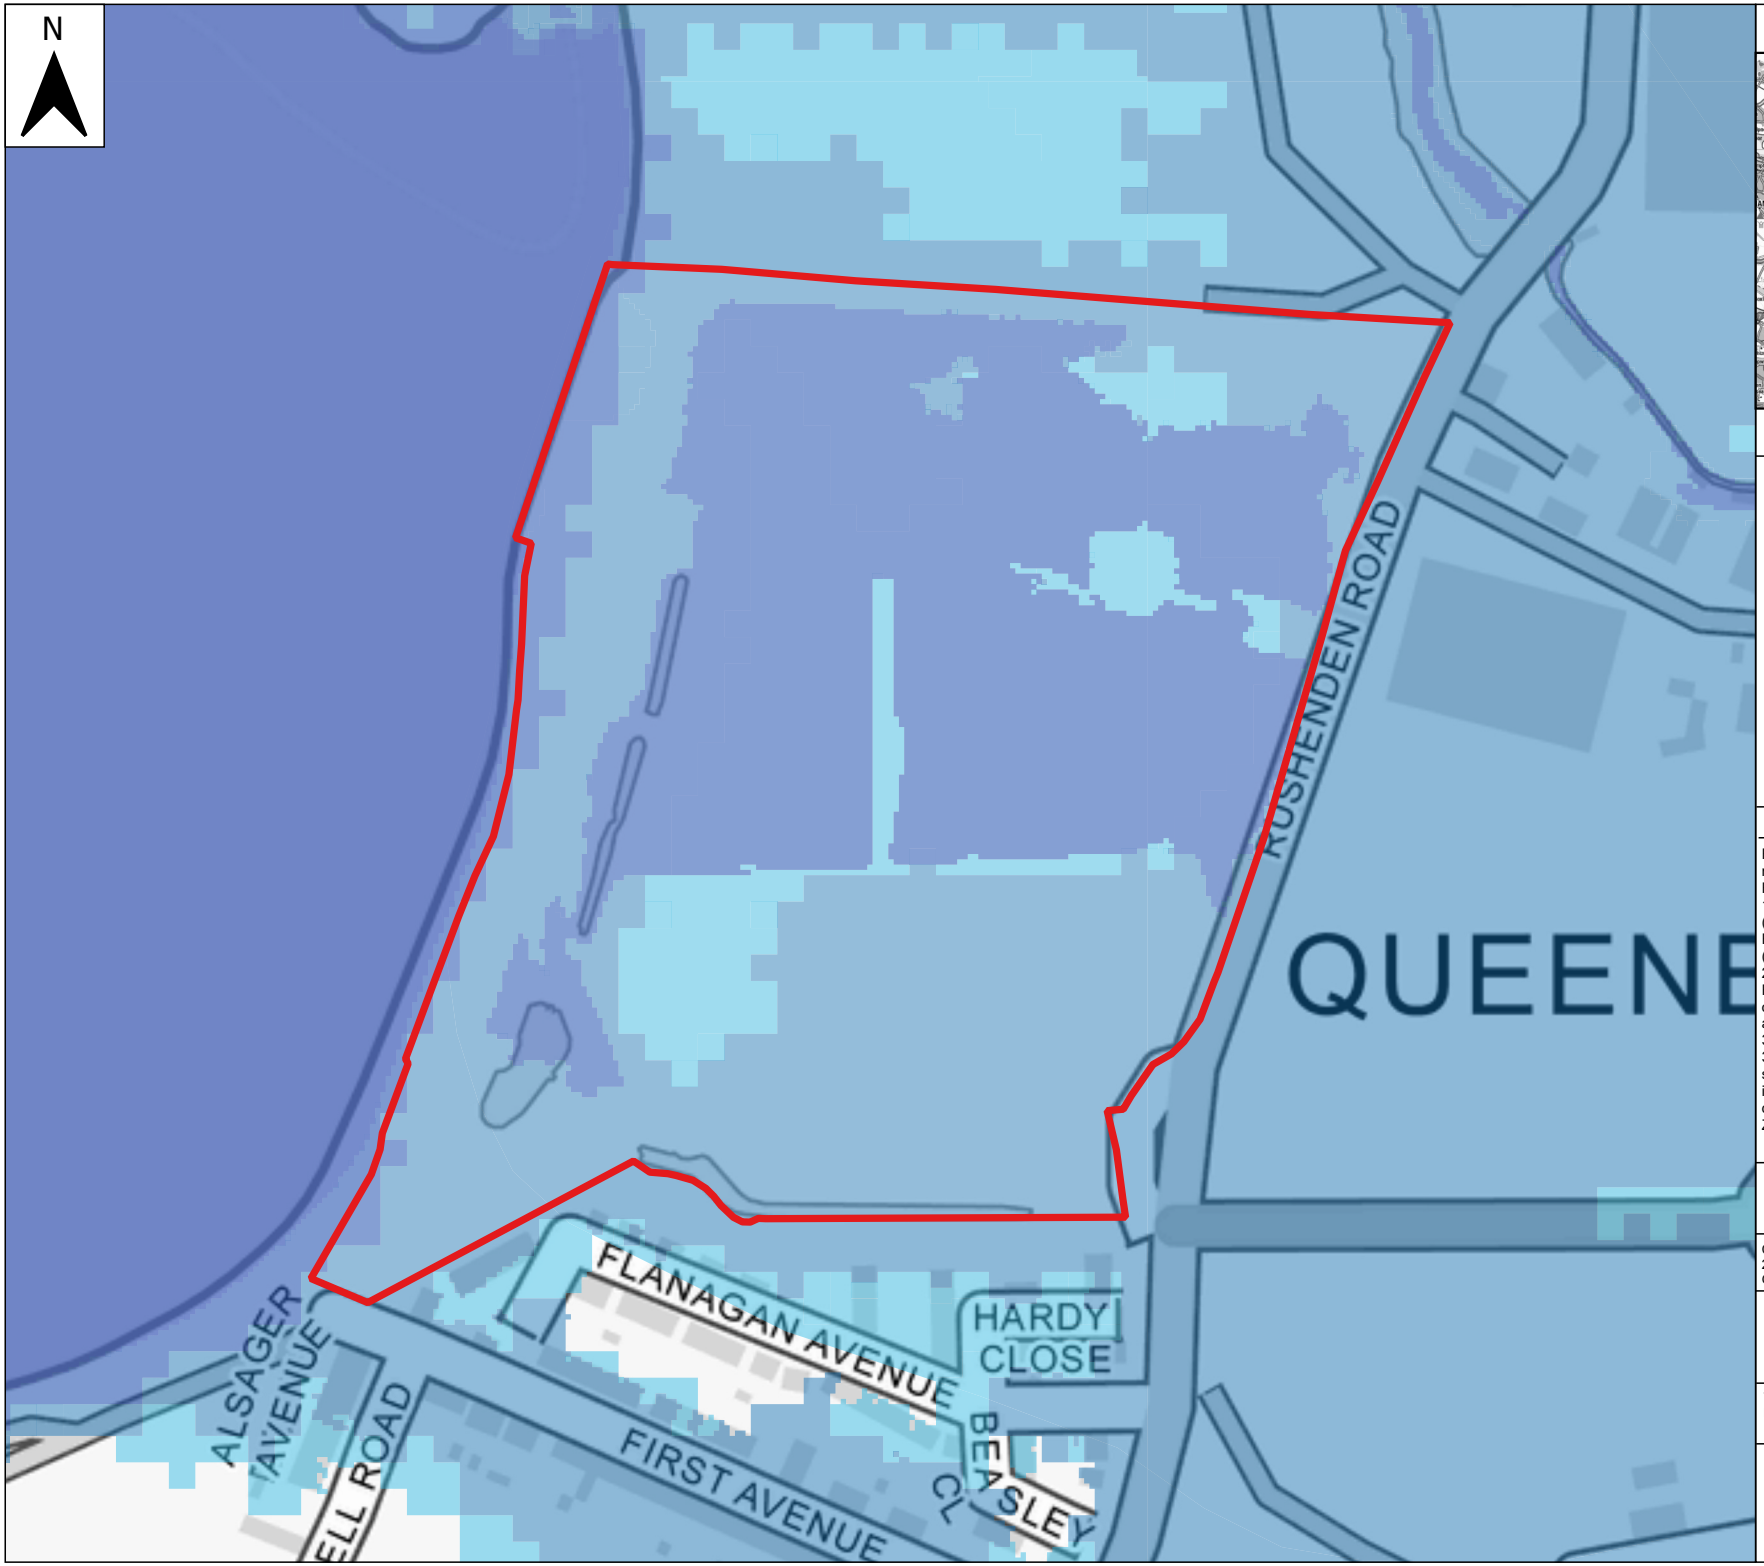

Location Plan

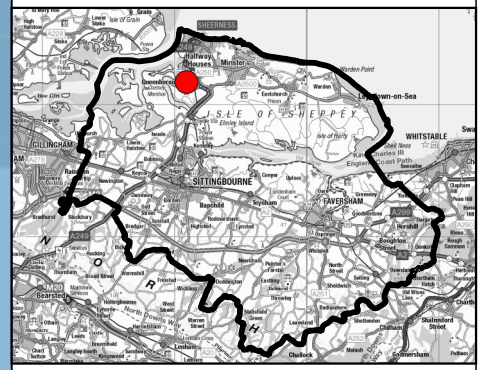

Legend

- Swale Borough Outline
- Site boundary

Flood Zone

- Flood Zone 2
- Flood Zone 3
- Flood Zone 3b
- Generalised modelling used for Flood Zone 3b

Notes

Flood Zone 1: Land assessed as having a less than 0.1% AEP of river or sea flooding.
Flood Zone 2: Land assessed as having a 0.1% - 1% AEP (1 in 1000-year and 1 in 100-year) of river flooding or a 0.1% - 0.5% AEP (1 in 1000-year and 1 in 200-year) of flooding from the sea.
Flood Zone 3a: Land assessed as having a greater than a 1% AEP (1 in 100-year) of river flooding or a greater than 0.5% AEP (1 in 200-year) of flooding from the sea.
Flood Zone 3b: Land where water has to flow or be stored in times of flood (functional floodplain). The SFRA identifies this Flood Zone as land which floods with an annual probability of 3.3% AEP (1 in 30-year) where detailed modelling exists. Where the 3.3% AEP (1 in 30-year) ouputs are not available, Flood Zone 3a is used as a surrogate as a precautionary approach. If a proposed development is in Flood Zone 3, further analysis should be undertaken in a detailed site specific FRA to define and confirm the extent of Flood Zone 3b.

0 70 140 m


Contains Ordnance Survey data © Crown copyright and database right 2026. Contains public sector information licensed under the Open Government Licence v3.0.

SWALE BOROUGH COUNCIL
LEVEL 2 SFRA:
PRESENT DAY FLOOD RISK FROM RIVERS AND SEA (FLOOD ZONES) - SHELAA-220


This document is the property of Jeremy Benn Associates Ltd. It shall not be reproduced in whole or in part, nor disclosed to a third party, without the permission of Jeremy Benn Associates Ltd.

JBA consulting

Swale BOROUGH COUNCIL
Making Swale a better place

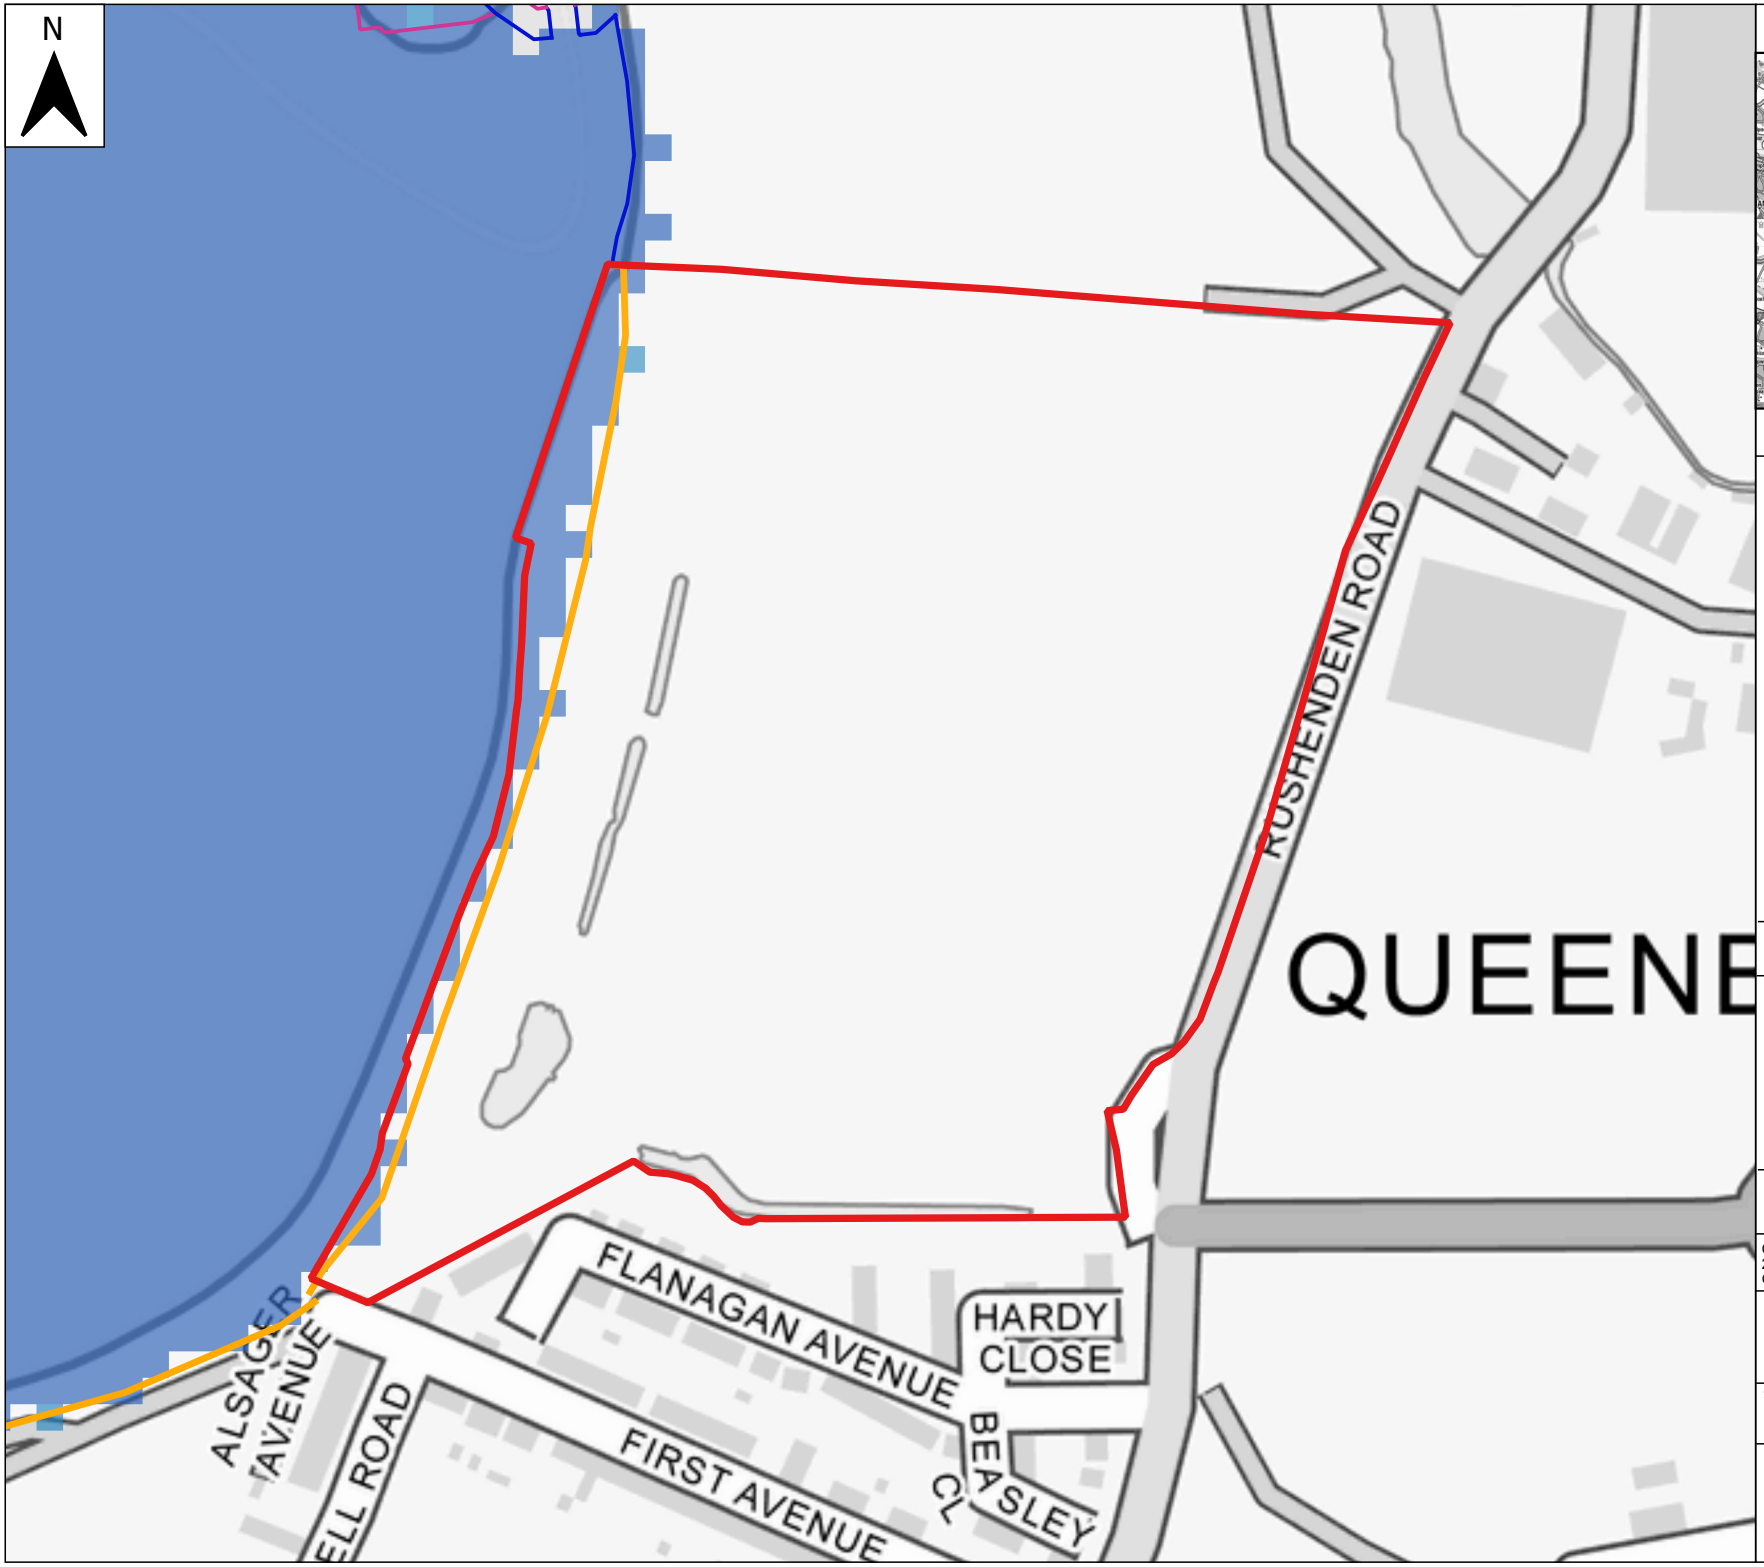

Location Plan

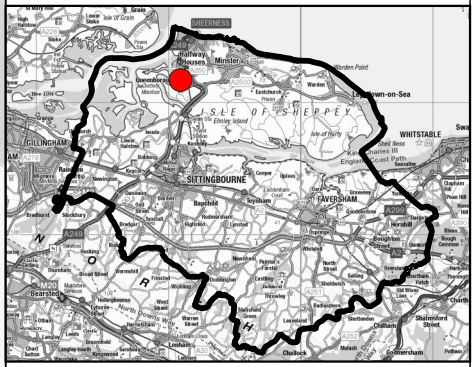

Legend

- Swale Borough Outline
- Site Boundary
- 3.3% AEP (1 in 30-year)
- 0.5% AEP (1 in 200-year)
- 0.1% AEP (1 in 1000-year)

EA Flood Defence Types

- Embankment
- Engineered High Ground
- Wall

Notes

Present day extents for the North Kent Coast modelling study shows the tidal and coastal flood risk for the 3.3% AEP (1 in 30-year) defended flood event and 0.5% AEP (1 in 200-year) and 0.1% (1 in 1000-year) defended flood events.

0 70 140 m


Contains Ordnance Survey data © Crown copyright and database right 2026. Contains public sector information licensed under the Open Government Licence v3.0.

SWALE BOROUGH COUNCIL
LEVEL 2 SFRA:
NORTH KENT COAST MODEL - DEFENDED
PRESENT DAY TIDAL EXTENT - SHELAA-220


This document is the property of Jeremy Benn Associates Ltd. It shall not be reproduced in whole or in part, nor disclosed to a third party, without the permission of Jeremy Benn Associates Ltd.

JBA consulting

Swale BOROUGH COUNCIL
Making Swale a better place

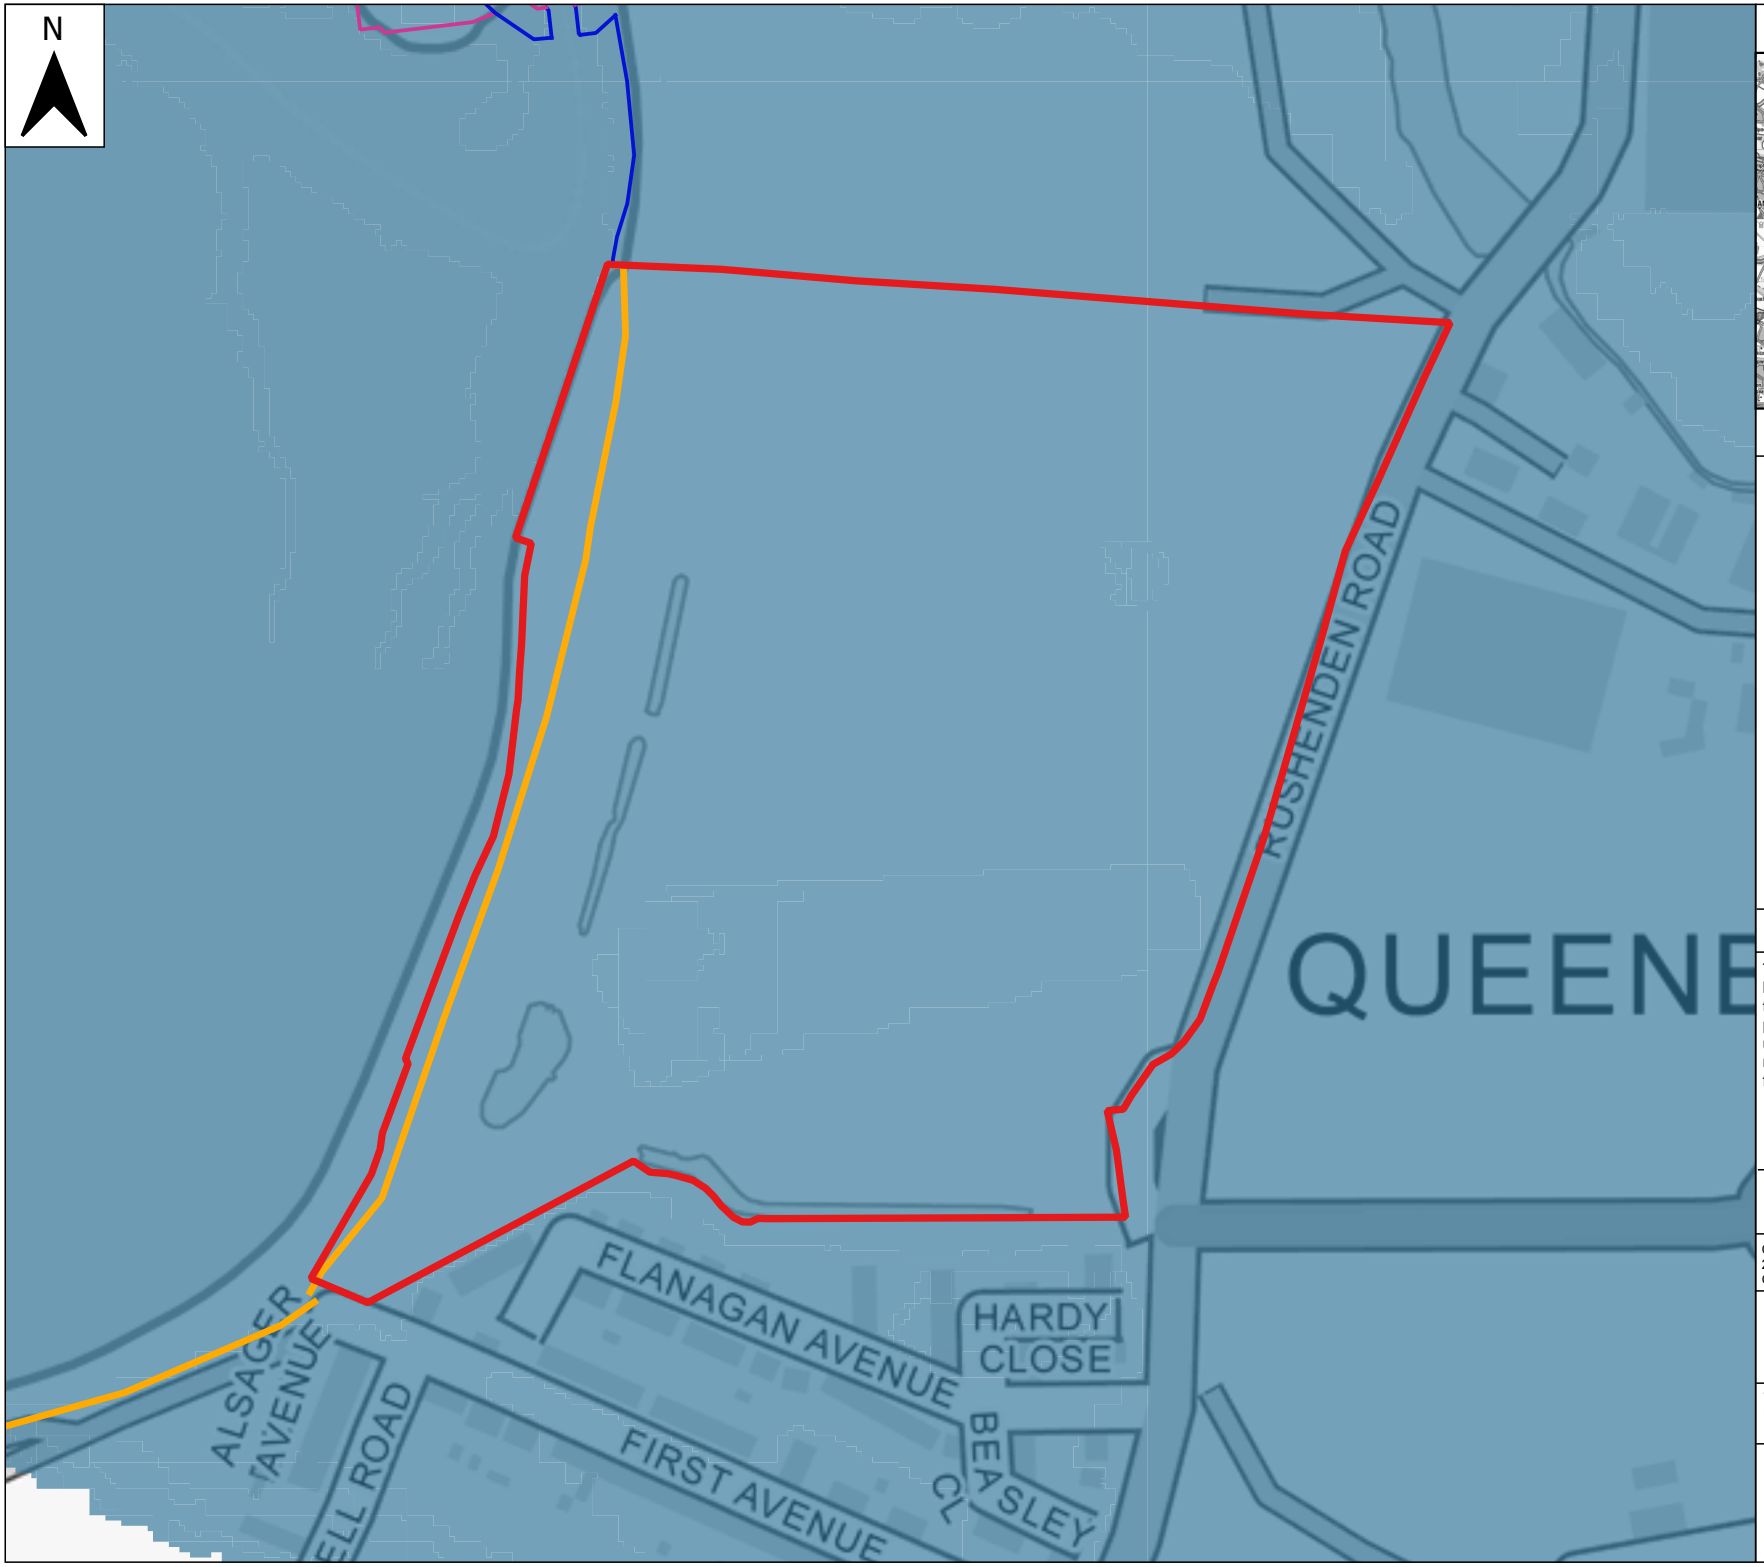

Location Plan

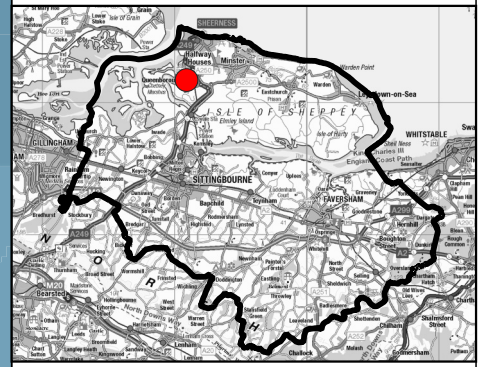

Legend

- Swale Borough Outline
- Site Boundary
- 1% AEP (1 in 100-year) and 0.1% AEP (1 in 1000-year) undefended extents under the 2125 year climate change scenario

Notes

The Flood Zone plus Climate Change mapping was produced by combining the Flood Zone 2 and Flood Zone 3 extents with the relevant climate change allowances to illustrate the potential future flood risk to the area. This represents an undefended scenario, meaning that existing flood defences are not considered in the modelling. For further information on this flood extent dataset, please refer to the guidance available on;

https://flood-map-for-planning.service.gov.uk/how-to-use-

0 70 140 m


Contains Ordnance Survey data © Crown copyright and database right 2026. Contains public sector information licensed under the Open Government Licence v3.0.

SWALE BOROUGH COUNCIL
LEVEL 2 SFRA:
FUTURE FLOOD RISK FROM RIVERS AND SEA - FLOOD MAP FOR PLANNING- SHELAA-220


This document is the property of Jeremy Benn Associates Ltd. It shall not be reproduced in whole or in part, nor disclosed to a third party, without the permission of Jeremy Benn Associates Ltd.

JBA consulting

Swale BOROUGH COUNCIL
Making Swale a better place

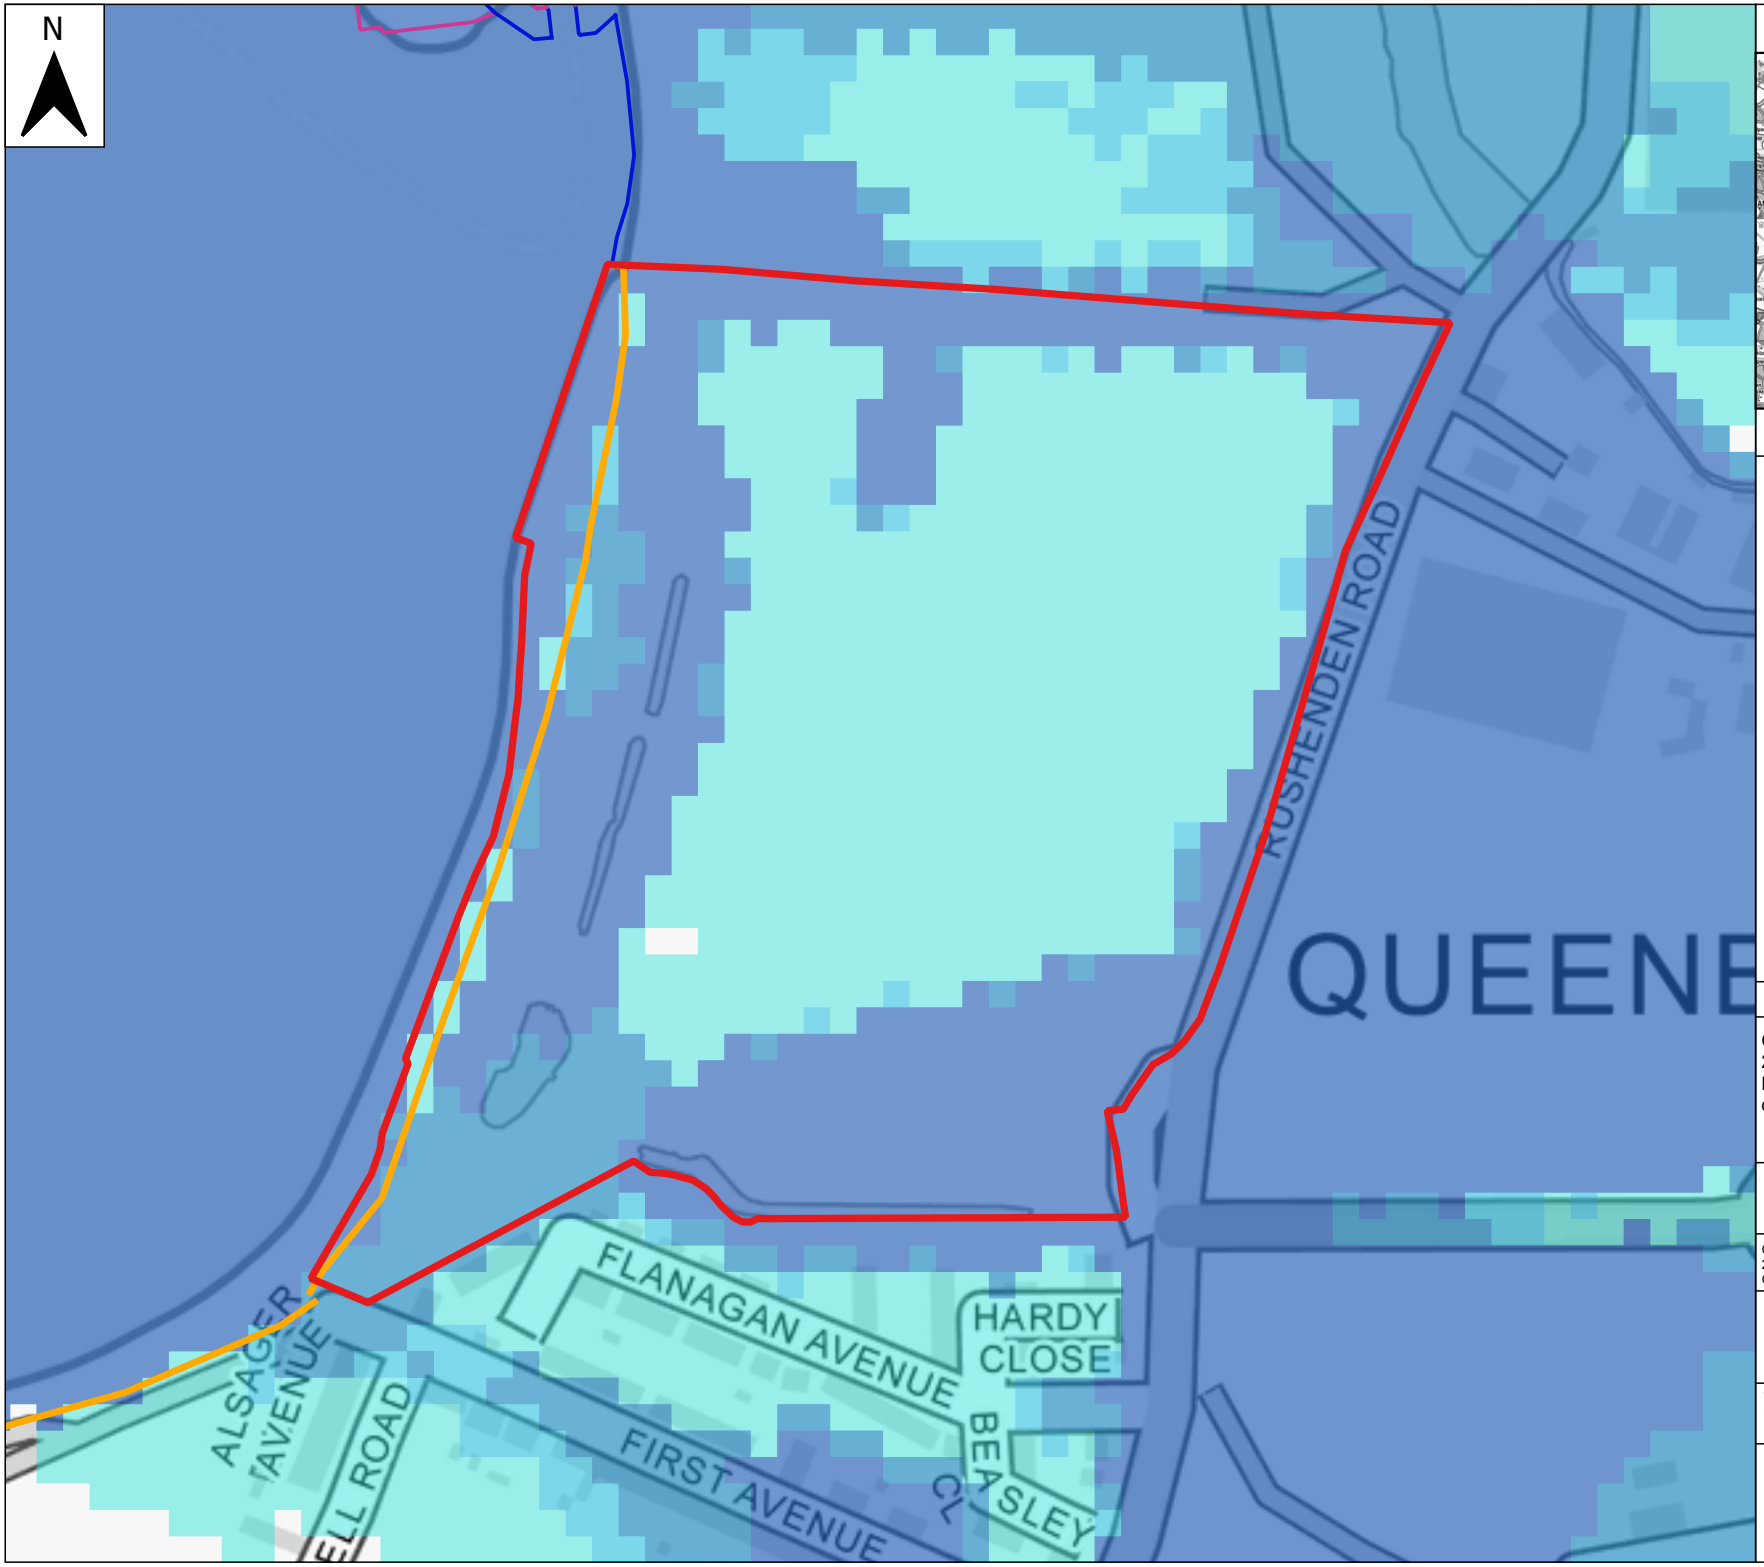

Location Plan

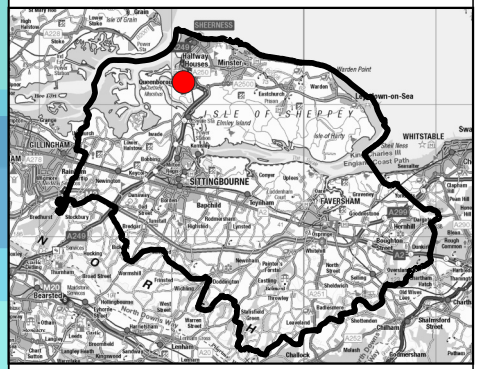

Legend

- Swale Borough Outline
- Site boundary
- 0.5% AEP (1 in 200-year) 2100 defended (higher central)
- 0.5% AEP (1 in 200-year) 2100 defended (upper end)
- 0.5% AEP (1 in 200-year) 2125 defended (higher central)
- 0.5% AEP (1 in 200-year) 2125 defended (upper end)

EA Flood Defences Types

- Embankment
- Engineered High Ground
- Wall

Notes

Climate change extents for the 0.5% AEP (1 in 200-year) events with the Higher Central and Upper End estimates (2100 and 2125) are shown. The difference in flood extents are relatively small.

0 70 140 m


Contains Ordnance Survey data © Crown copyright and database right 2026. Contains public sector information licensed under the Open Government Licence v3.0.

SWALE BOROUGH COUNCIL
LEVEL 2 SFRA:
FUTURE FLOOD RISK FROM THE SEA - NORTH KENT COAST MODEL - SHELAA-220


This document is the property of Jeremy Benn Associates Ltd. It shall not be reproduced in whole or in part, nor disclosed to a third party, without the permission of Jeremy Benn Associates Ltd.

JBA consulting

Swale BOROUGH COUNCIL
Making Swale a better place

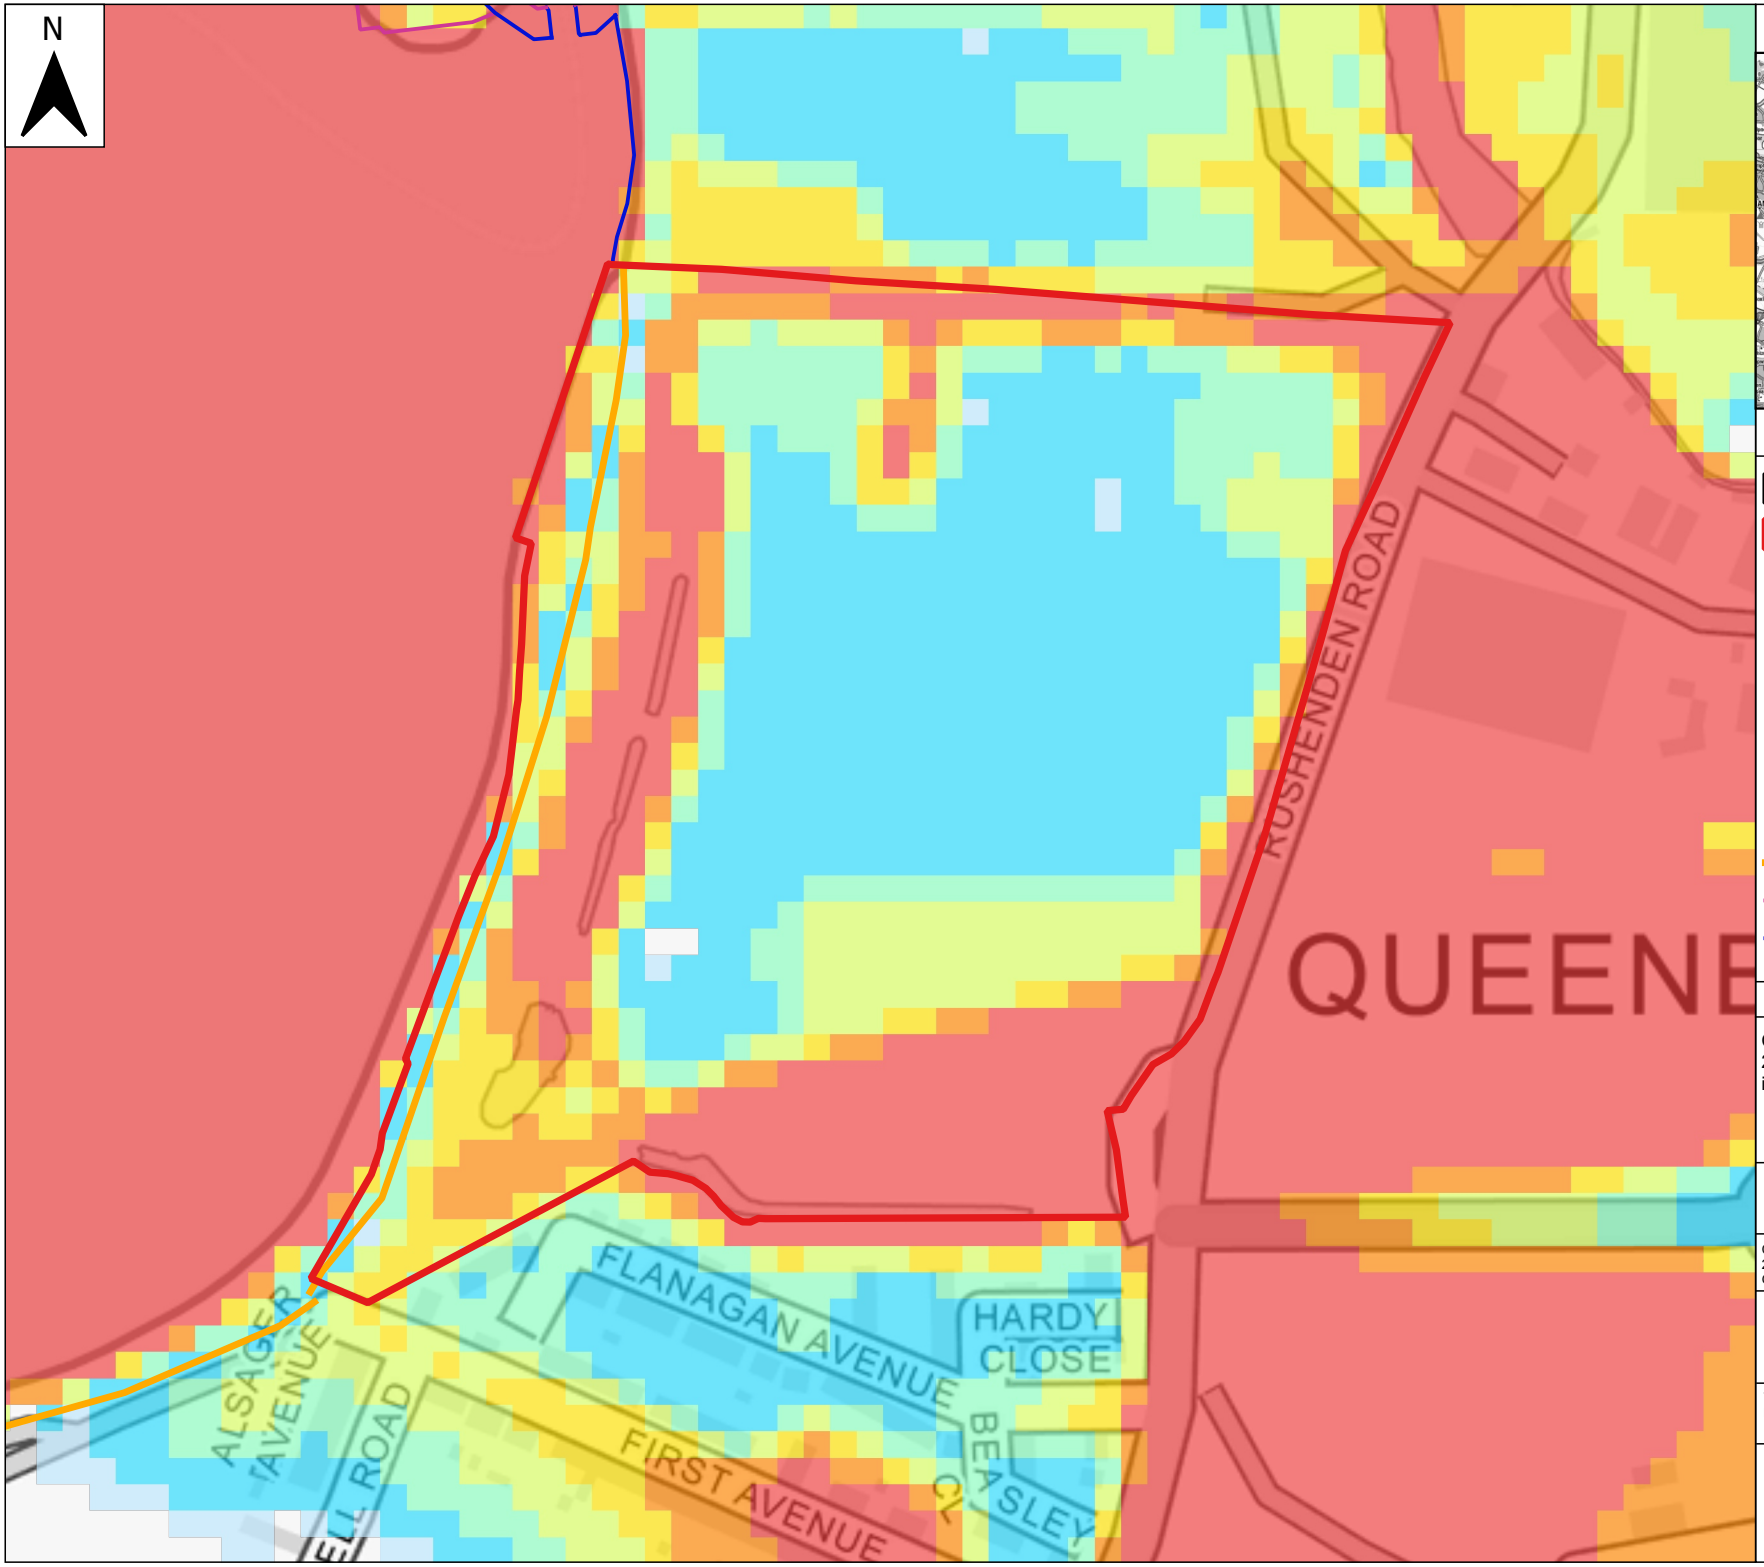

Location Plan

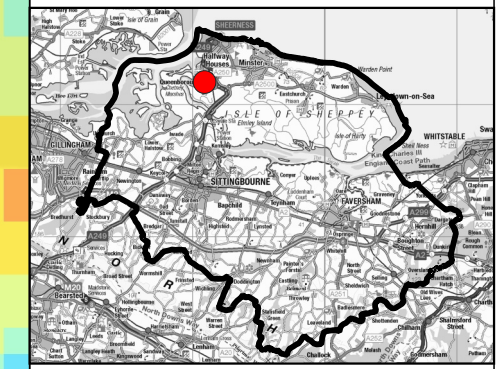

Legend

- Swale Borough Outline
- Site boundary

North Kent Coast Model - Defended
0.5% AEP (1 in 200-year) 2125 UE depth (m)

- 0.00 - 0.10
- 0.10 - 0.50
- 0.50 - 1.00
- 1.00 - 1.50
- 1.50 - 2.00
- 2.00 - 2.50
- > 2.50

EA Flood Defences Types

- Embankment
- Engineered High Ground
- Wall

Notes

Climate change depths for the 0.5% AEP (1 in 200-year) event with the Upper End estimate (2125) is shown.

0 70 140 m


Contains Ordnance Survey data © Crown copyright and database right 2026. Contains public sector information licensed under the Open Government Licence v3.0.

SWALE BOROUGH COUNCIL
LEVEL 2 SFRA:
FUTURE FLOOD RISK FROM THE SEA - NORTH KENT COAST MODEL DEPTH - SHELAA-220


This document is the property of Jeremy Benn Associates Ltd. It shall not be reproduced in whole or in part, nor disclosed to a third party, without the permission of Jeremy Benn Associates Ltd.

JBA consulting

Swale BOROUGH COUNCIL
Making Swale a better place

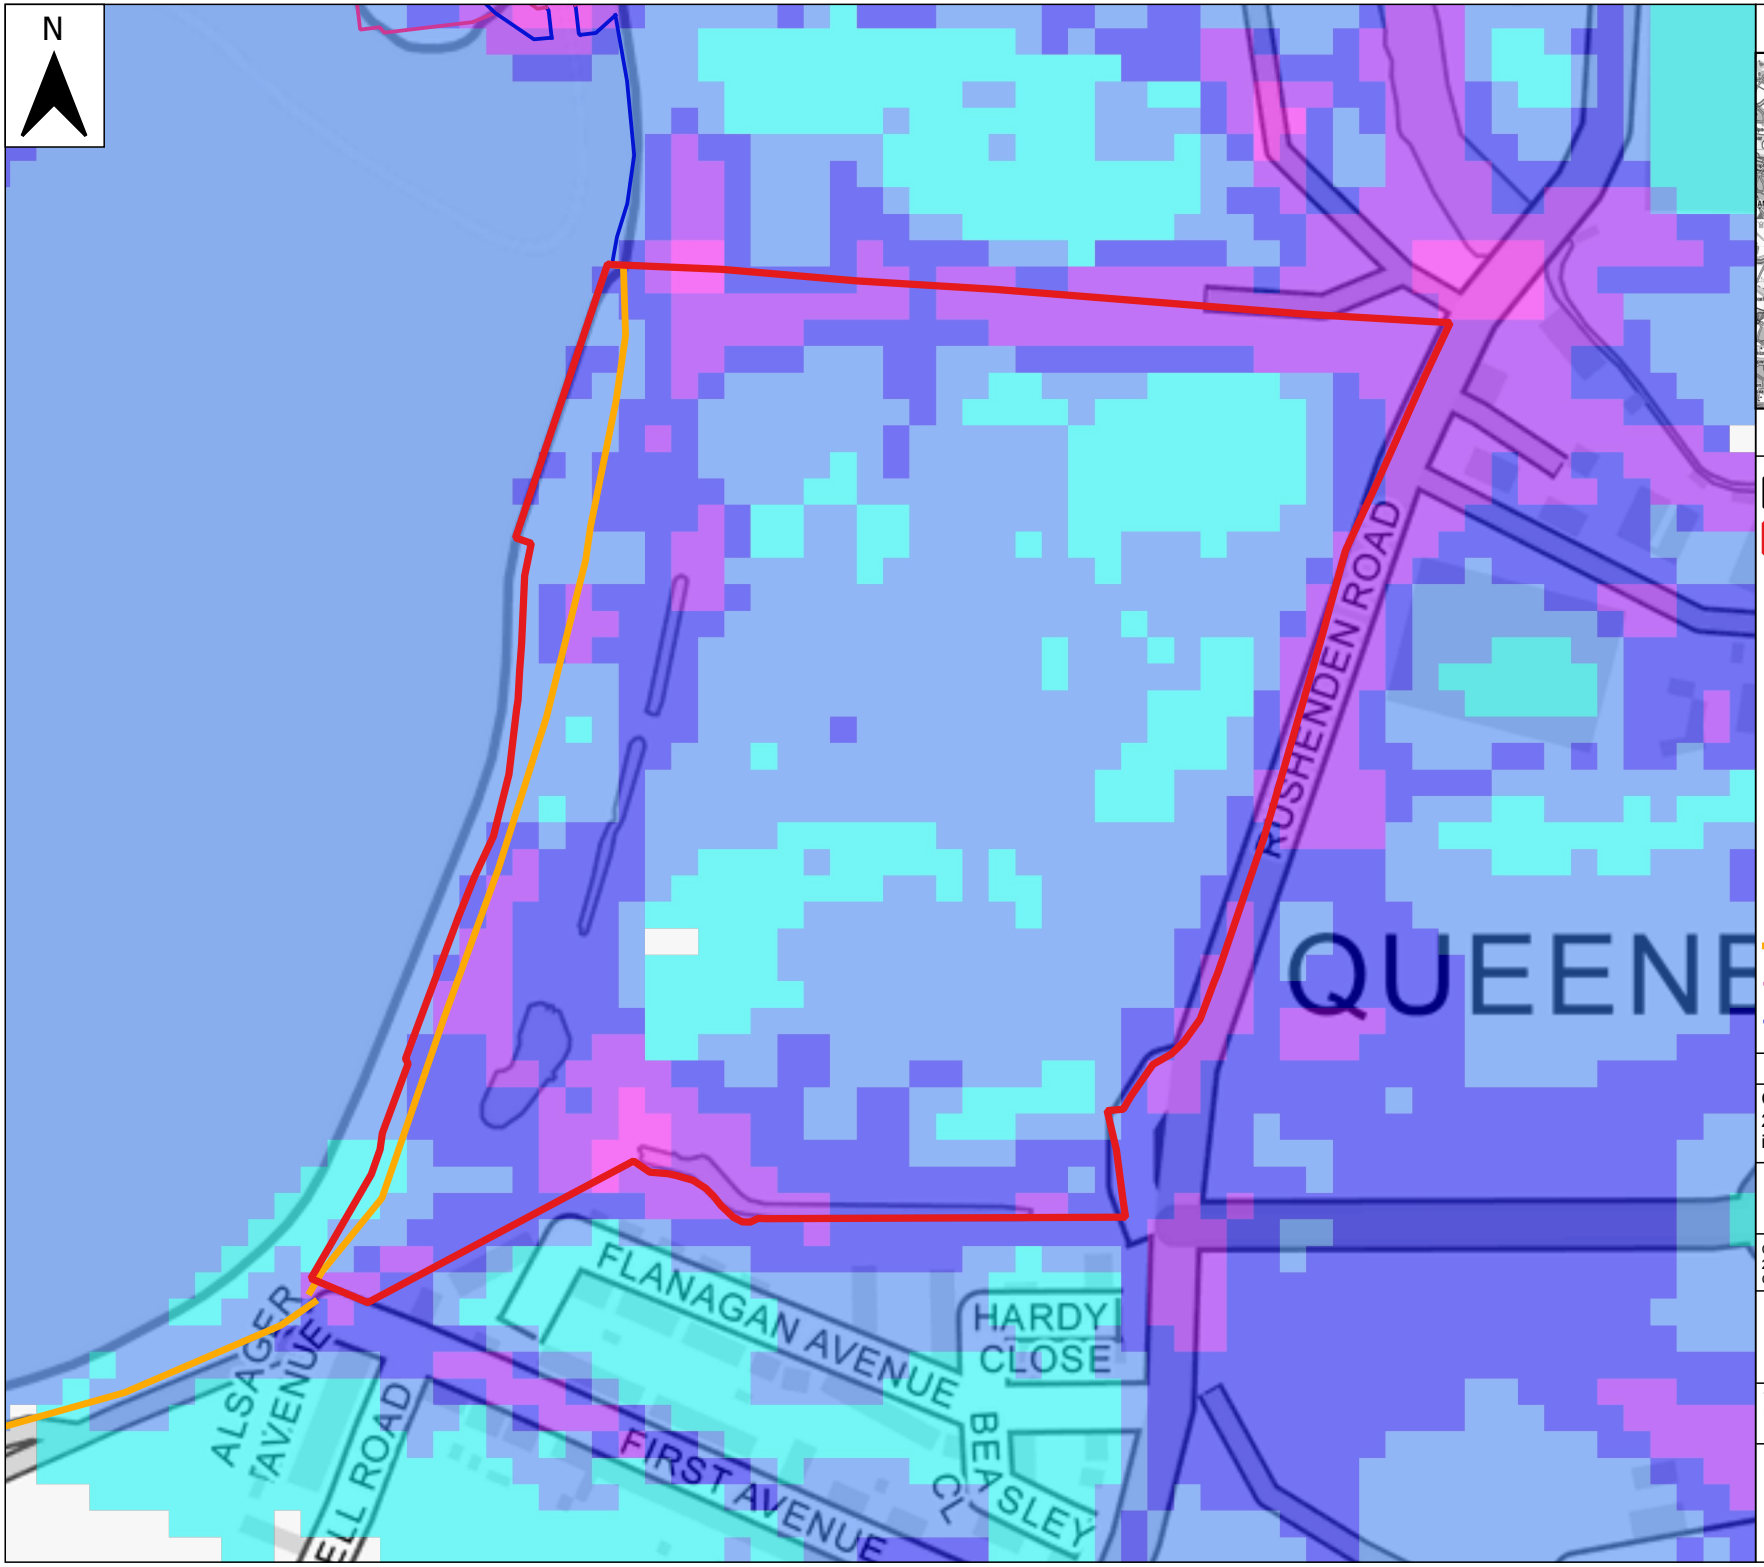

Location Plan

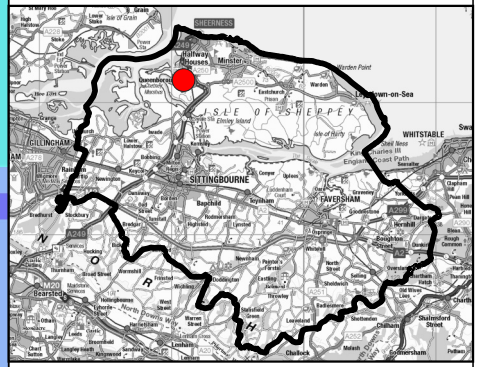

Legend

- Swale Borough Outline
- Site boundary

North Kent Coast Model - Defended 0.5% AEP (1 in 200-year) 2125 UE Velocity (m/s)

- 0.0 - 0.2
- 0.2 - 0.5
- 0.5 - 1.0
- 1.0 - 2.0
- > 2.0

EA Flood Defences Types

- Embankment
- Engineered High Ground
- Wall

Notes

Climate change velocity for the 0.5% AEP (1 in 200-year) event with the Upper End estimate (2125) is shown.

0 70 140 m


Contains Ordnance Survey data © Crown copyright and database right 2026. Contains public sector information licensed under the Open Government Licence v3.0.

SWALE BOROUGH COUNCIL
LEVEL 2 SFRA:
FUTURE FLOOD RISK FROM THE SEA - NORTH KENT COAST MODEL VELOCITY - SHELAA-220


This document is the property of Jeremy Benn Associates Ltd. It shall not be reproduced in whole or in part, nor disclosed to a third party, without the permission of Jeremy Benn Associates Ltd.

JBA consulting

Swale BOROUGH COUNCIL
Making Swale a better place

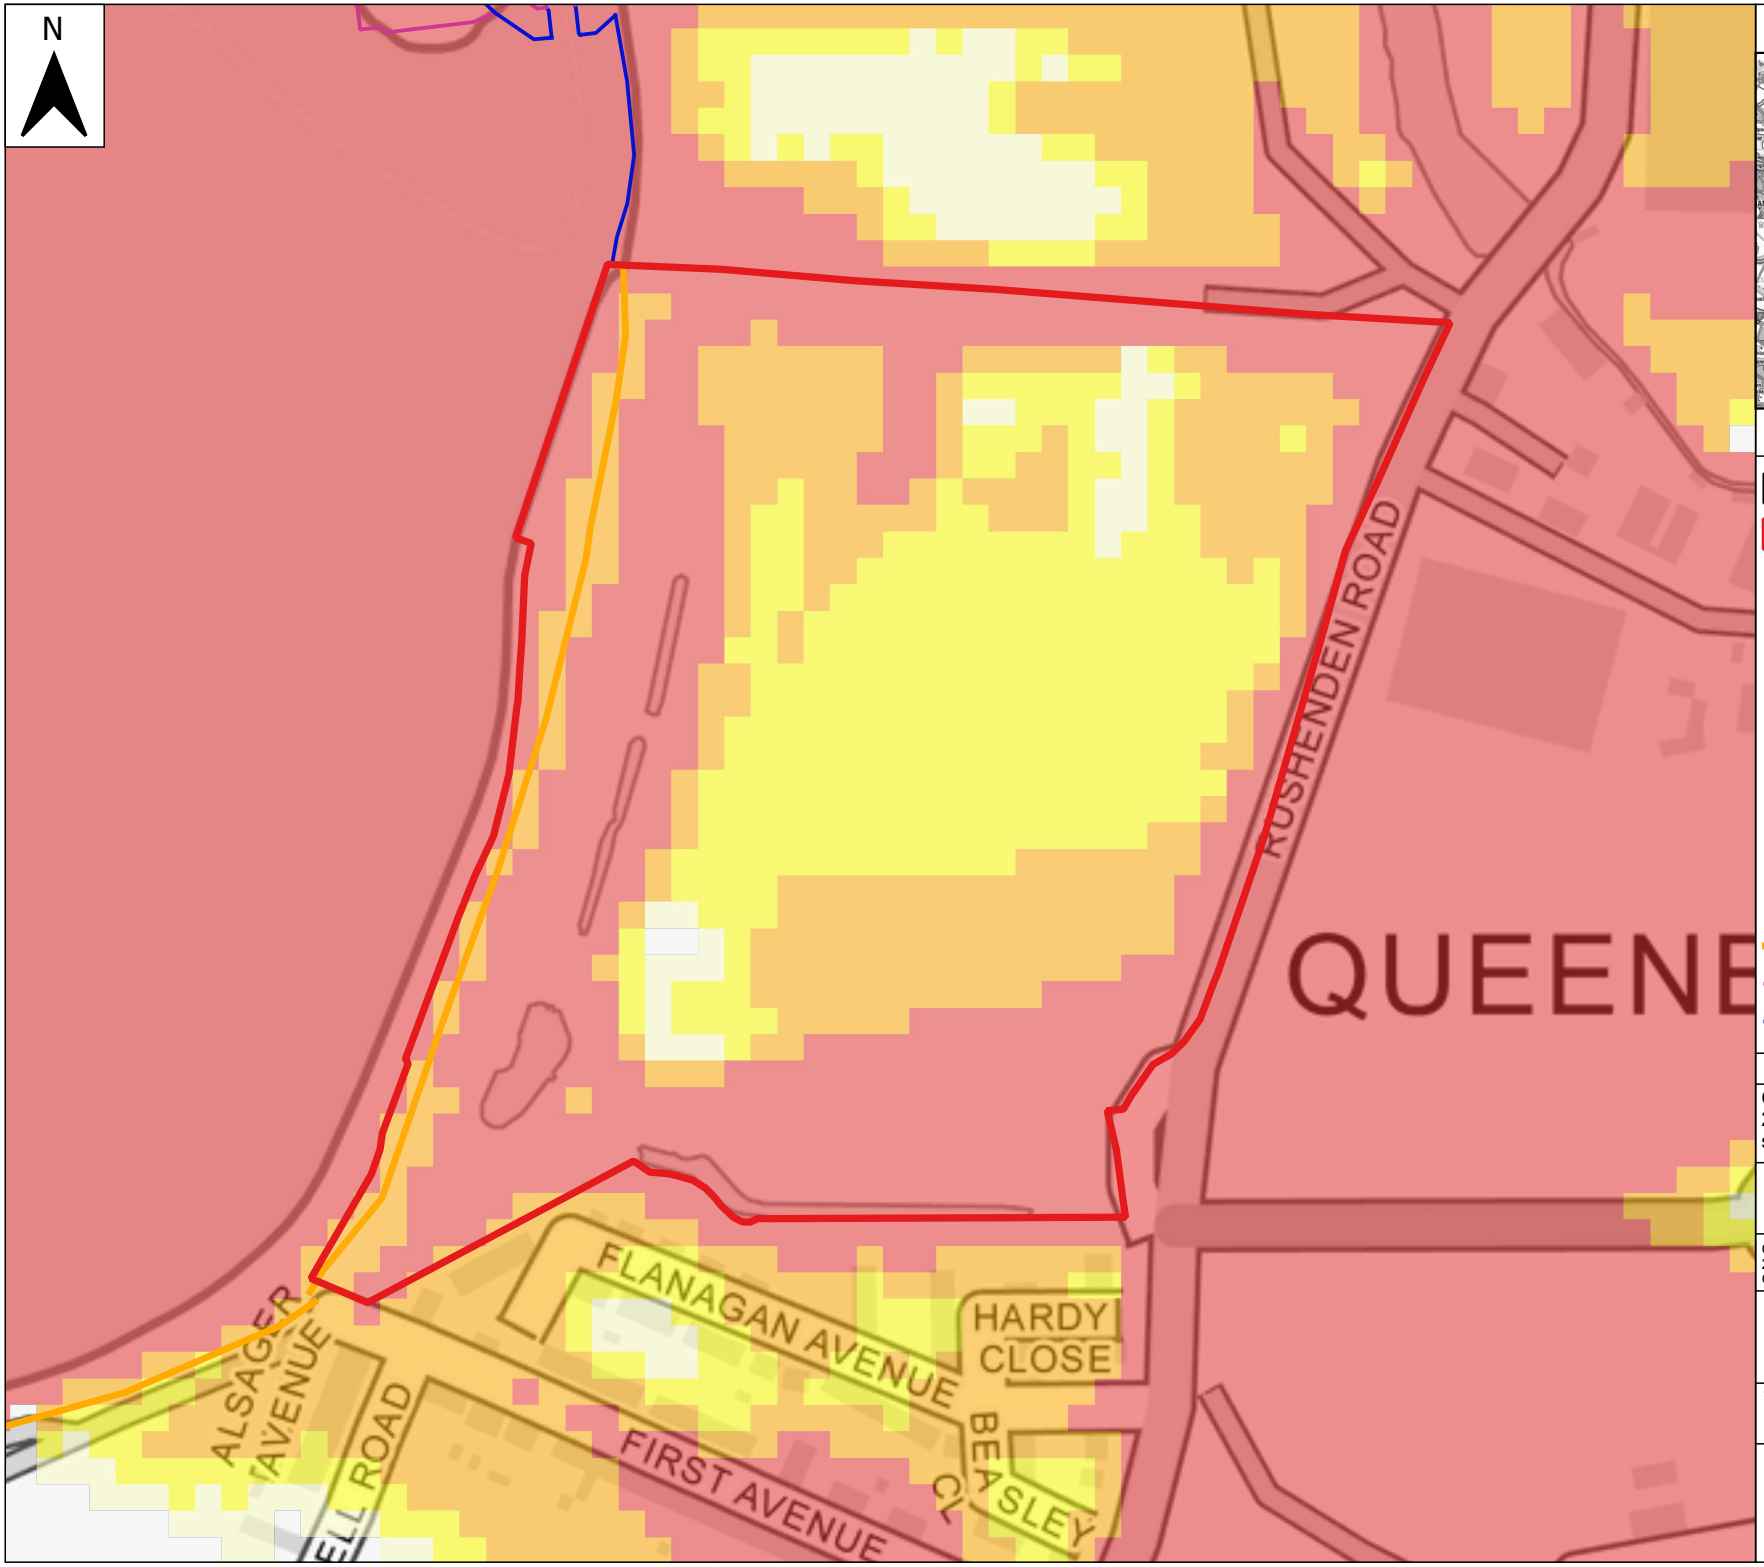

Location Plan

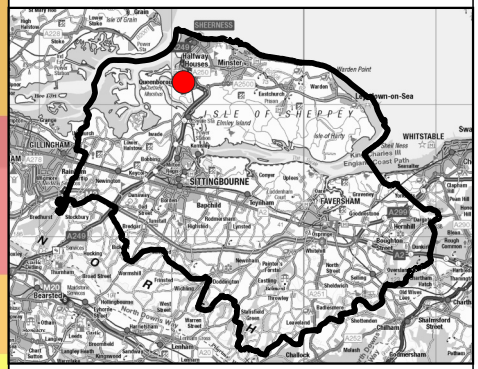

Legend

- Swale Borough Outline
- Site boundary

North Kent Coast Model - Defended 0.5% AEP (1 in 200-year) 2125 UE hazard classification

- No hazard
- Very low hazard - Caution
- Danger for some
- Danger for most
- Danger for all

EA Flood Defences Types

- Embankment
- Engineered High Ground
- Wall

Notes

Climate change hazard for the 0.5% AEP (1 in 200-year) event with the Upper End estimate (2125) is shown.

0 70 140 m


Contains Ordnance Survey data © Crown copyright and database right 2026. Contains public sector information licensed under the Open Government Licence v3.0.

SWALE BOROUGH COUNCIL
LEVEL 2 SFRA:
FUTURE FLOOD RISK FROM THE SEA - NORTH KENT COAST MODEL HAZARD - SHELAA-220


This document is the property of Jeremy Benn Associates Ltd. It shall not be reproduced in whole or in part, nor disclosed to a third party, without the permission of Jeremy Benn Associates Ltd.

JBA consulting

Swale BOROUGH COUNCIL
Making Swale a better place

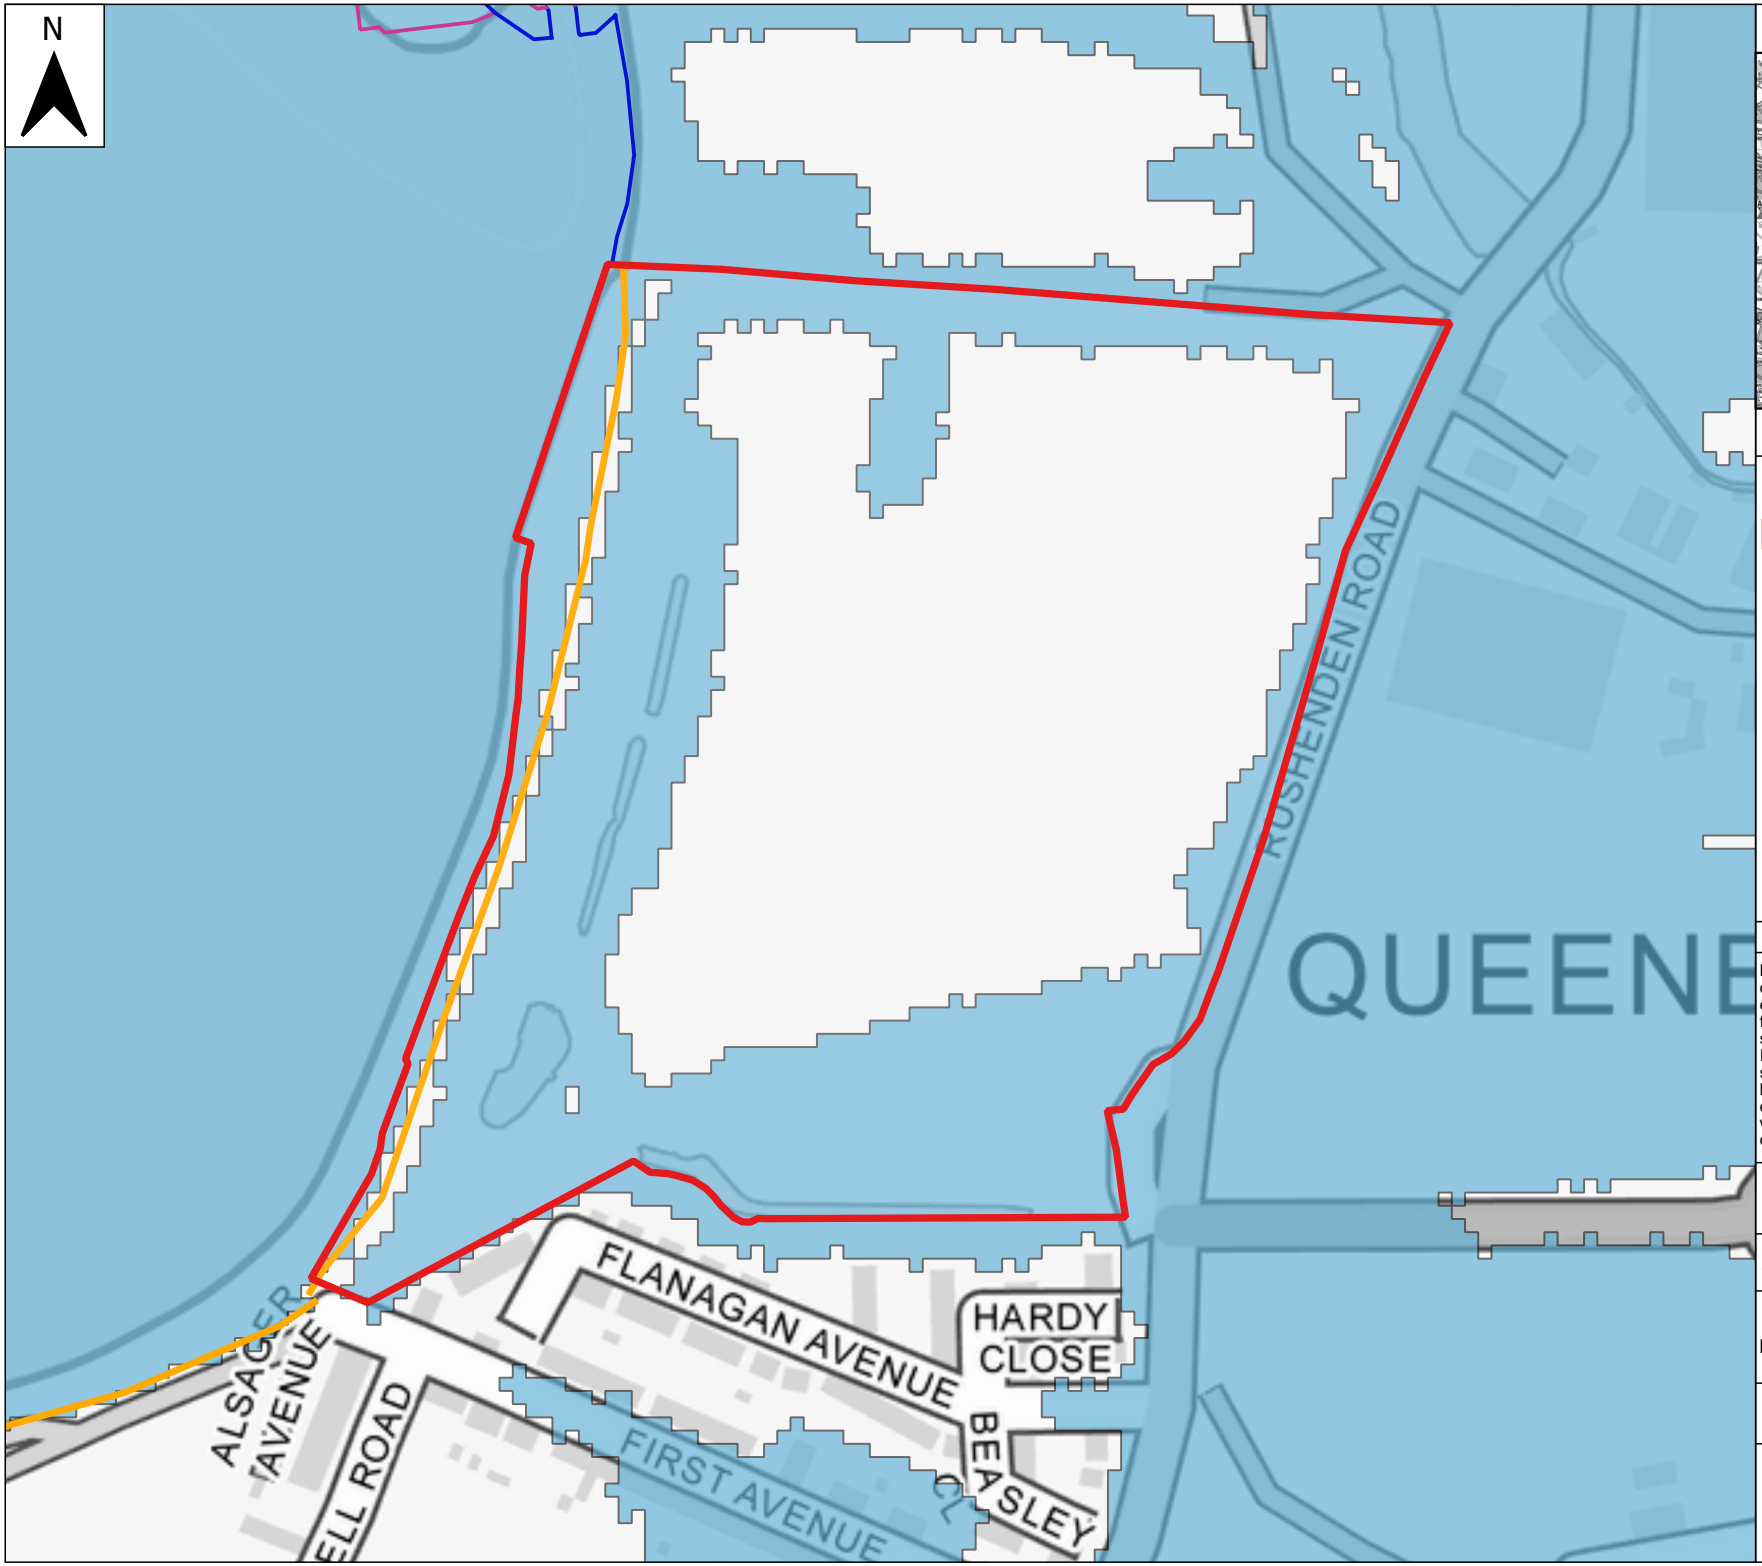

Location Plan

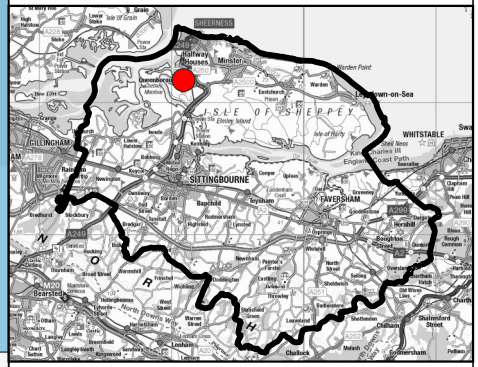

Legend

- Swale Borough Outline
- Site boundary
- North Kent Coast Model - 0.5% AEP (1 in 200-year) 2075 UE Breach Extent

EA Flood Defences Types

- Embankment
- Engineered High Ground
- Wall

Notes

Breach modelling is a hydraulic approach used to simulate the failure or overtopping of a flood defence, such as a flood wall or embankment, during a given flood event. It assesses how such a failure would influence flood extents and the potential impacts on surrounding areas.
In the North Kent Coast Model, breach modelling was carried out at several locations. The results presented here relate to all of the breaches, which represent simulated failures of surrounding defences during the climate change 0.5% AEP (1 in 200-year) event with the Upper End estimate (2075), illustrating the predicted extent of flooding under these conditions.

0 70 140 m


Contains Ordnance Survey data © Crown copyright and database right 2026. Contains public sector information licensed under the Open Government Licence v3.0.

SWALE BOROUGH COUNCIL
LEVEL 2 SFRA:
FUTURE BREACH RISK FROM THE SEA - NORTH KENT COAST MODEL EXTENT - SHELAA-220


This document is the property of Jeremy Benn Associates Ltd. It shall not be reproduced in whole or in part, nor disclosed to a third party, without the permission of Jeremy Benn Associates Ltd.

JBA consulting

Swale BOROUGH COUNCIL
Making Swale a better place

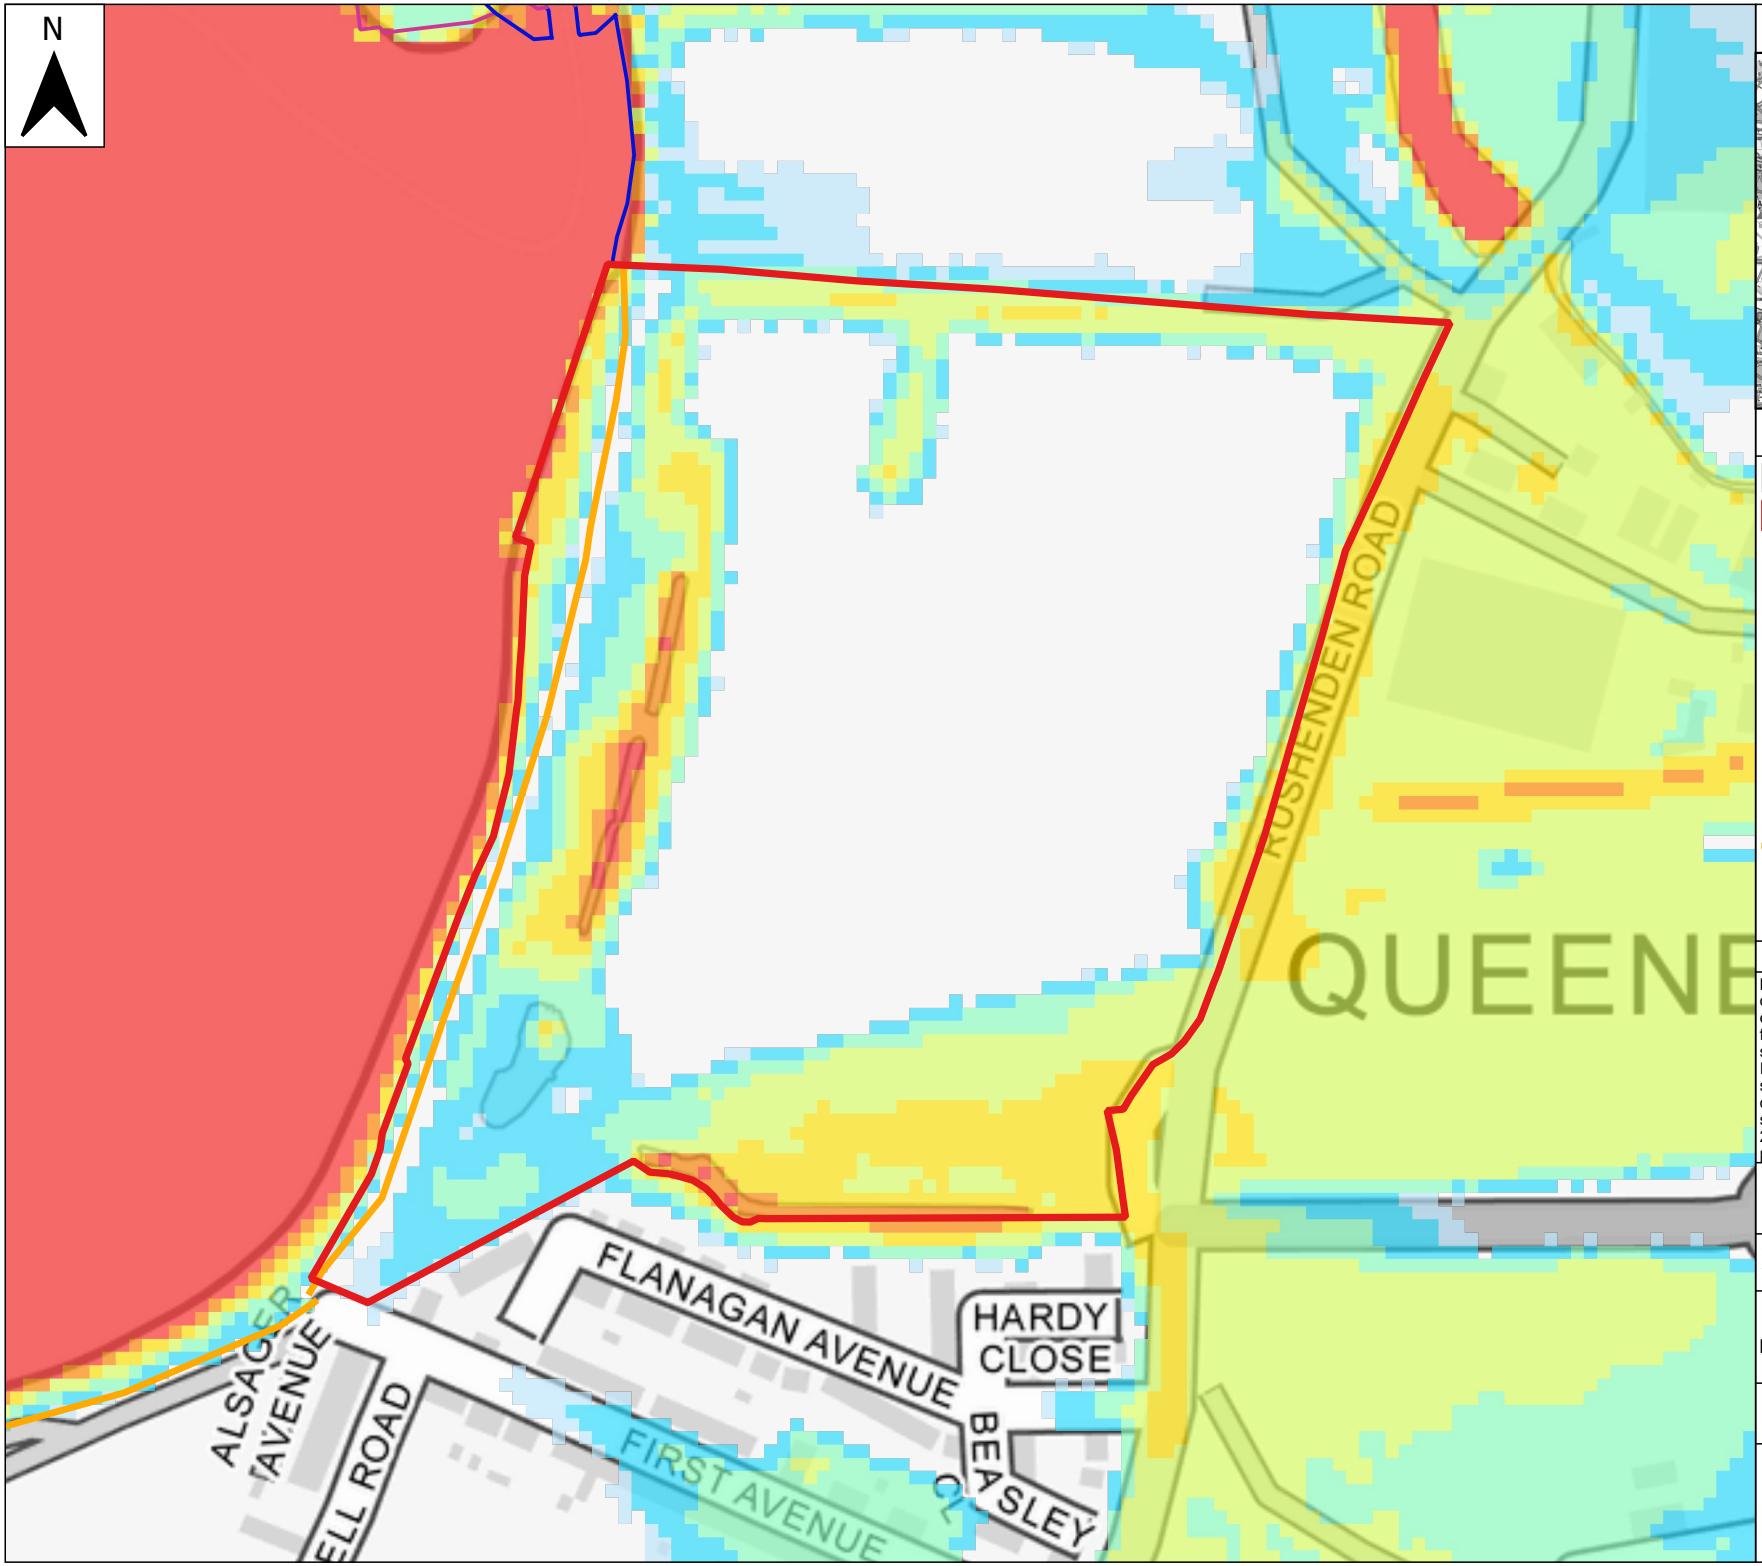

Location Plan

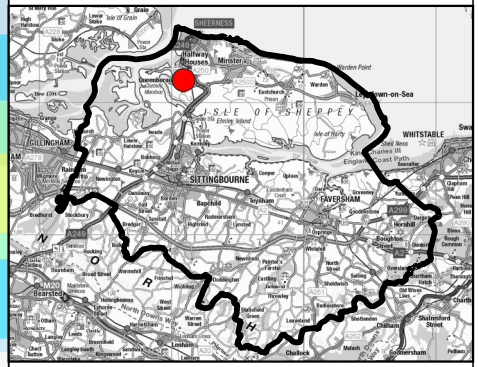

Legend

- Swale Borough Outline
- Site boundary

North Kent Coast Model - 0.5% AEP (1 in 200-year) 2075 UE Breach Depth (m)

- 0.00 - 0.10
- 0.10 - 0.50
- 0.50 - 1.00
- 1.00 - 1.50
- 1.50 - 2.00
- 2.00 - 2.50
- > 2.50

EA Flood Defences Types

- Embankment
- Engineered High Ground
- Wall

Notes

Breach modelling is a hydraulic approach used to simulate the failure or overtopping of a flood defence, such as a flood wall or embankment, during a given flood event. It assesses how such a failure would influence flood extents and the potential impacts on surrounding areas.
In the North Kent Coast Model, breach modelling was carried out at several locations. The results presented here relate to the maximum depth of all the breaches, which represent simulated failures of surrounding defences during the climate change 0.5% AEP (1 in 200-year) event with the Upper End estimate (2075), illustrating the predicted depth of flooding under these conditions.

0 70 140 m

Contains Ordnance Survey data © Crown copyright and database right 2026. Contains public sector information licensed under the Open Government Licence v3.0.

SWALE BOROUGH COUNCIL
LEVEL 2 SFRA:
FUTURE BREACH RISK FROM THE SEA - NORTH KENT COAST MODEL DEPTH - SHELAA-220


This document is the property of Jeremy Benn Associates Ltd. It shall not be reproduced in whole or in part, nor disclosed to a third party, without the permission of Jeremy Benn Associates Ltd.

JBA consulting

Swale BOROUGH COUNCIL
Making Swale a better place



Location Plan

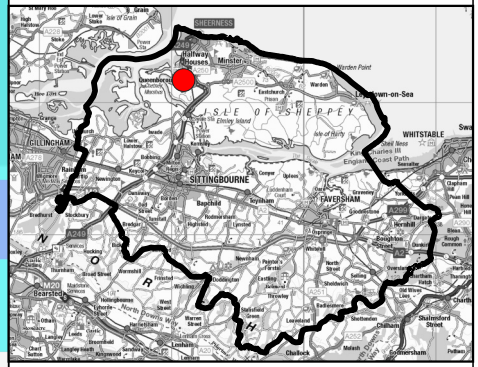

Legend

- Swale Borough Outline
- Site boundary

North Kent Coast Model - 0.5% AEP (1 in 200-year) 2075 UE Breach Velocity (m/s)

- 0.0 - 0.2
- 0.2 - 0.5
- 0.5 - 1.0
- 1.0 - 2.0
- > 2.0

EA Flood Defences Types

- Embankment
- Engineered High Ground
- Wall

Notes

Breach modelling is a hydraulic approach used to simulate the failure or overtopping of a flood defence, such as a flood wall or embankment, during a given flood event. It assesses how such a failure would influence flood extents and the potential impacts on surrounding areas.
In the North Kent Coast Model, breach modelling was carried out at several locations. The results presented here relate to the maximum velocity of all the breaches, which represent simulated failures of surrounding defences during the climate change 0.5% AEP (1 in 200-year) event with the Upper End estimate (2075), illustrating the predicted velocity of flooding under these conditions.

0 70 140 m


Contains Ordnance Survey data © Crown copyright and database right 2026. Contains public sector information licensed under the Open Government Licence v3.0.

SWALE BOROUGH COUNCIL
LEVEL 2 SFRA:
FUTURE BREACH RISK FROM THE SEA - NORTH KENT COAST MODEL VELOCITY - SHELAA-220


This document is the property of Jeremy Benn Associates Ltd. It shall not be reproduced in whole or in part, nor disclosed to a third party, without the permission of Jeremy Benn Associates Ltd.

JBA consulting

Swale BOROUGH COUNCIL
Making Swale a better place

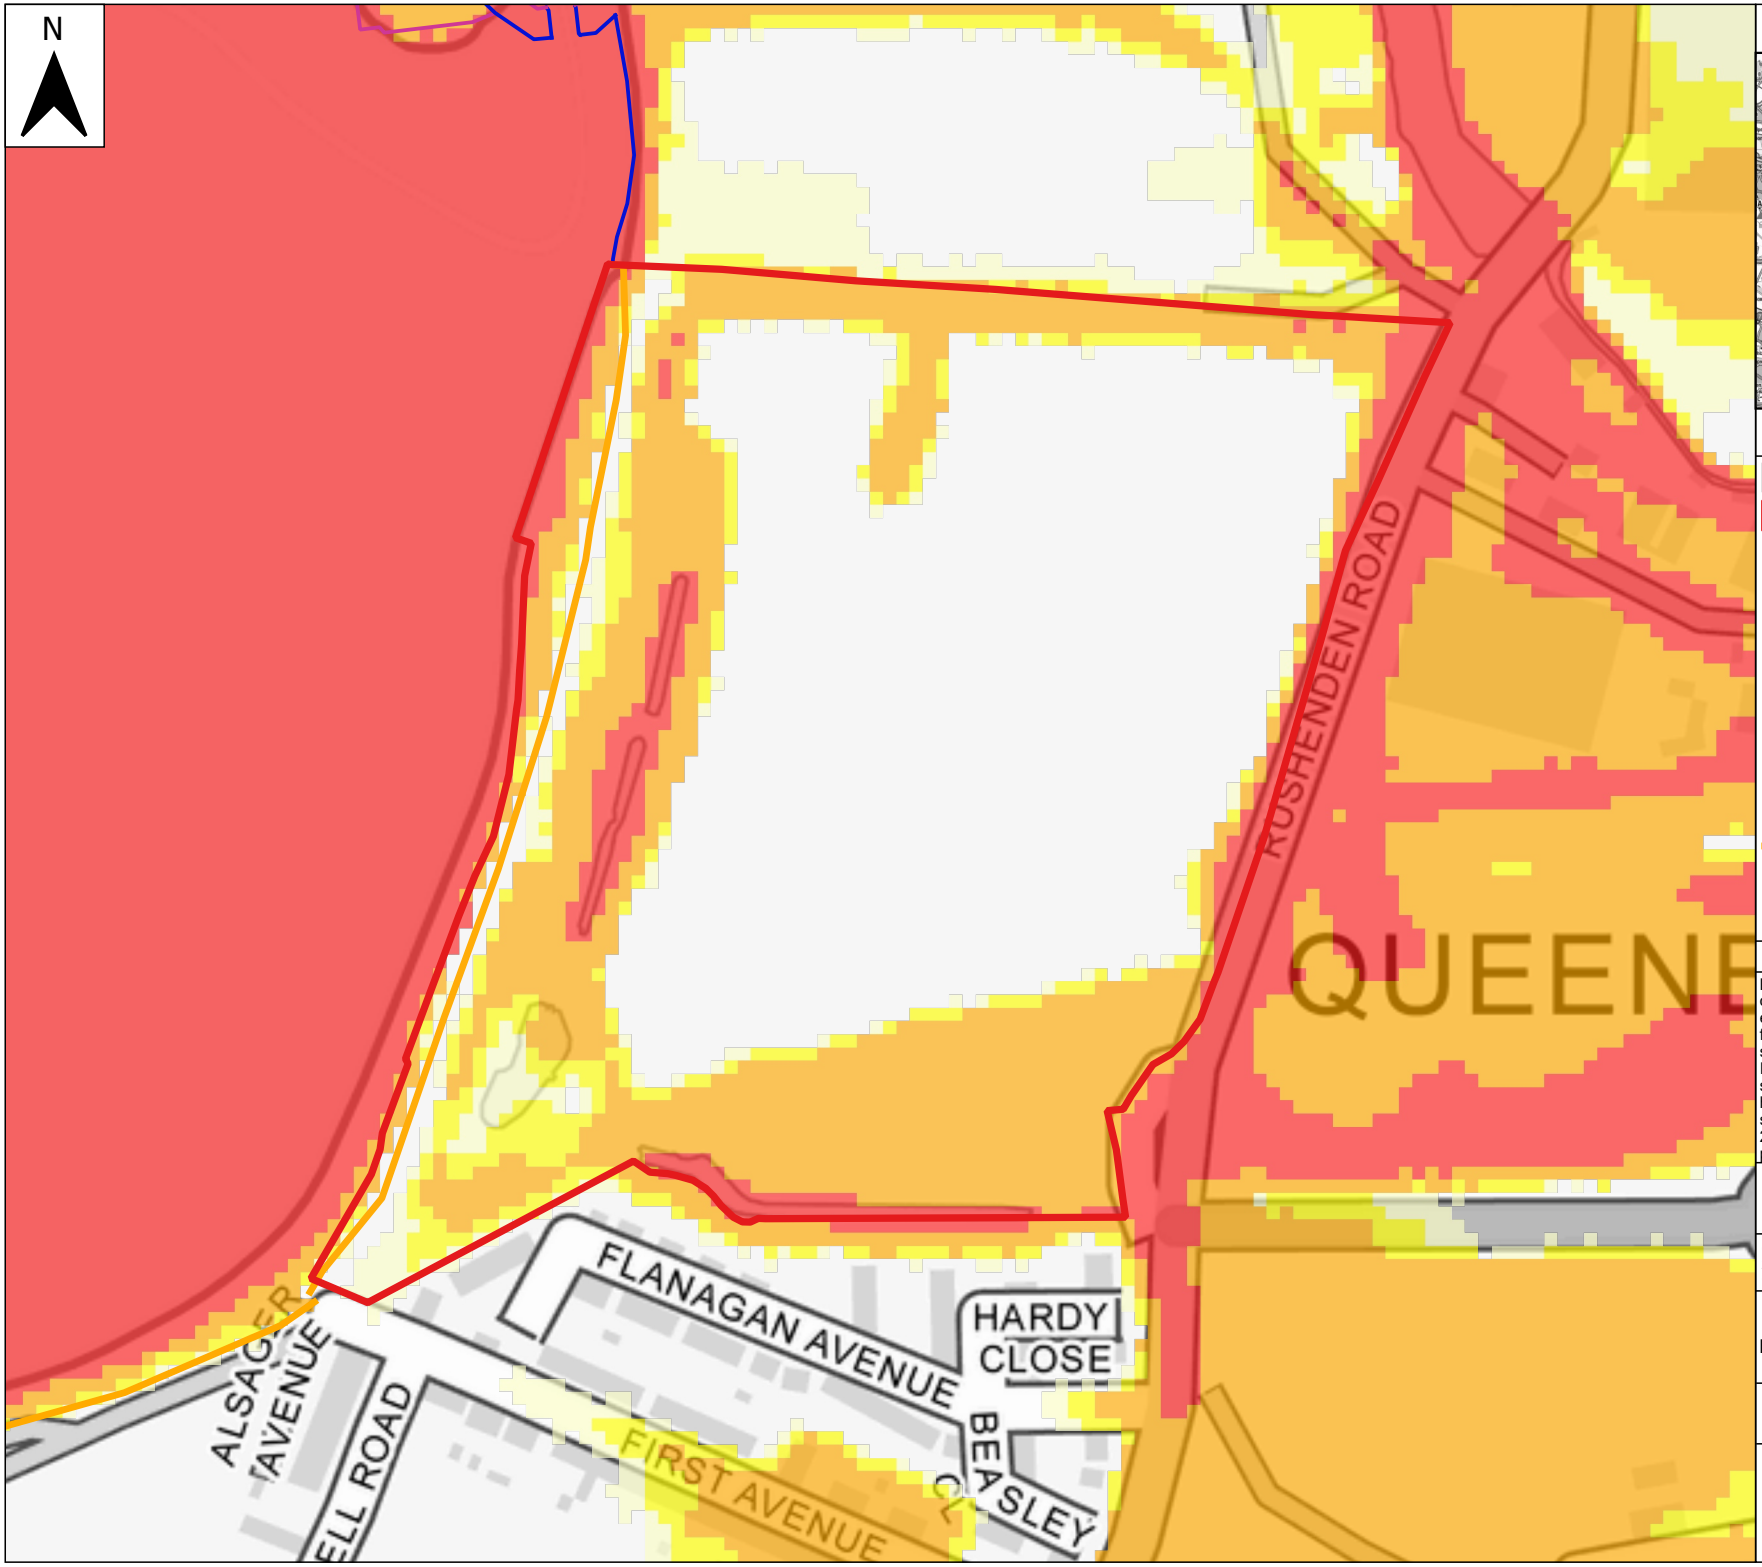

Location Plan

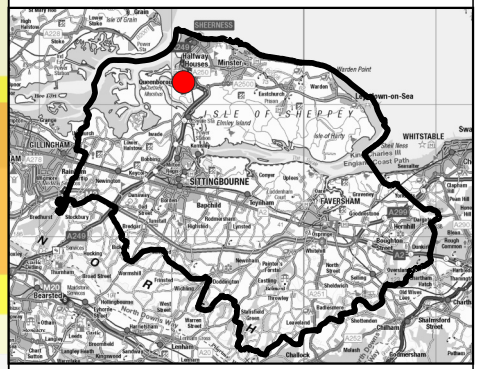

Legend

- Swale Borough Outline
- Site boundary

North Kent Coast Model - 0.5% AEP (1 in 200-year) 2075 UE Breach Hazard Classification

- No hazard
- Very low hazard - Caution
- Danger for some
- Danger for most
- Danger for all

EA Flood Defences Types

- Embankment
- Engineered High Ground
- Wall

Notes

Breach modelling is a hydraulic approach used to simulate the failure or overtopping of a flood defence, such as a flood wall or embankment, during a given flood event. It assesses how such a failure would influence flood extents and the potential impacts on surrounding areas.
In the North Kent Coast Model, breach modelling was carried out at several locations. The results presented here relate to the maximum hazard of all the breaches, which represent simulated failures of surrounding defences during the climate change 0.5% AEP (1 in 200-year) event with the Upper End estimate (2075), illustrating the predicted hazard of flooding under these conditions.

0 70 140 m


Contains Ordnance Survey data © Crown copyright and database right 2026. Contains public sector information licensed under the Open Government Licence v3.0.

SWALE BOROUGH COUNCIL
LEVEL 2 SFRA:
FUTURE BREACH RISK FROM THE SEA - NORTH KENT COAST MODEL HAZARD - SHELAA-220


This document is the property of Jeremy Benn Associates Ltd. It shall not be reproduced in whole or in part, nor disclosed to a third party, without the permission of Jeremy Benn Associates Ltd.

JBA consulting

Swale BOROUGH COUNCIL
Making Swale a better place

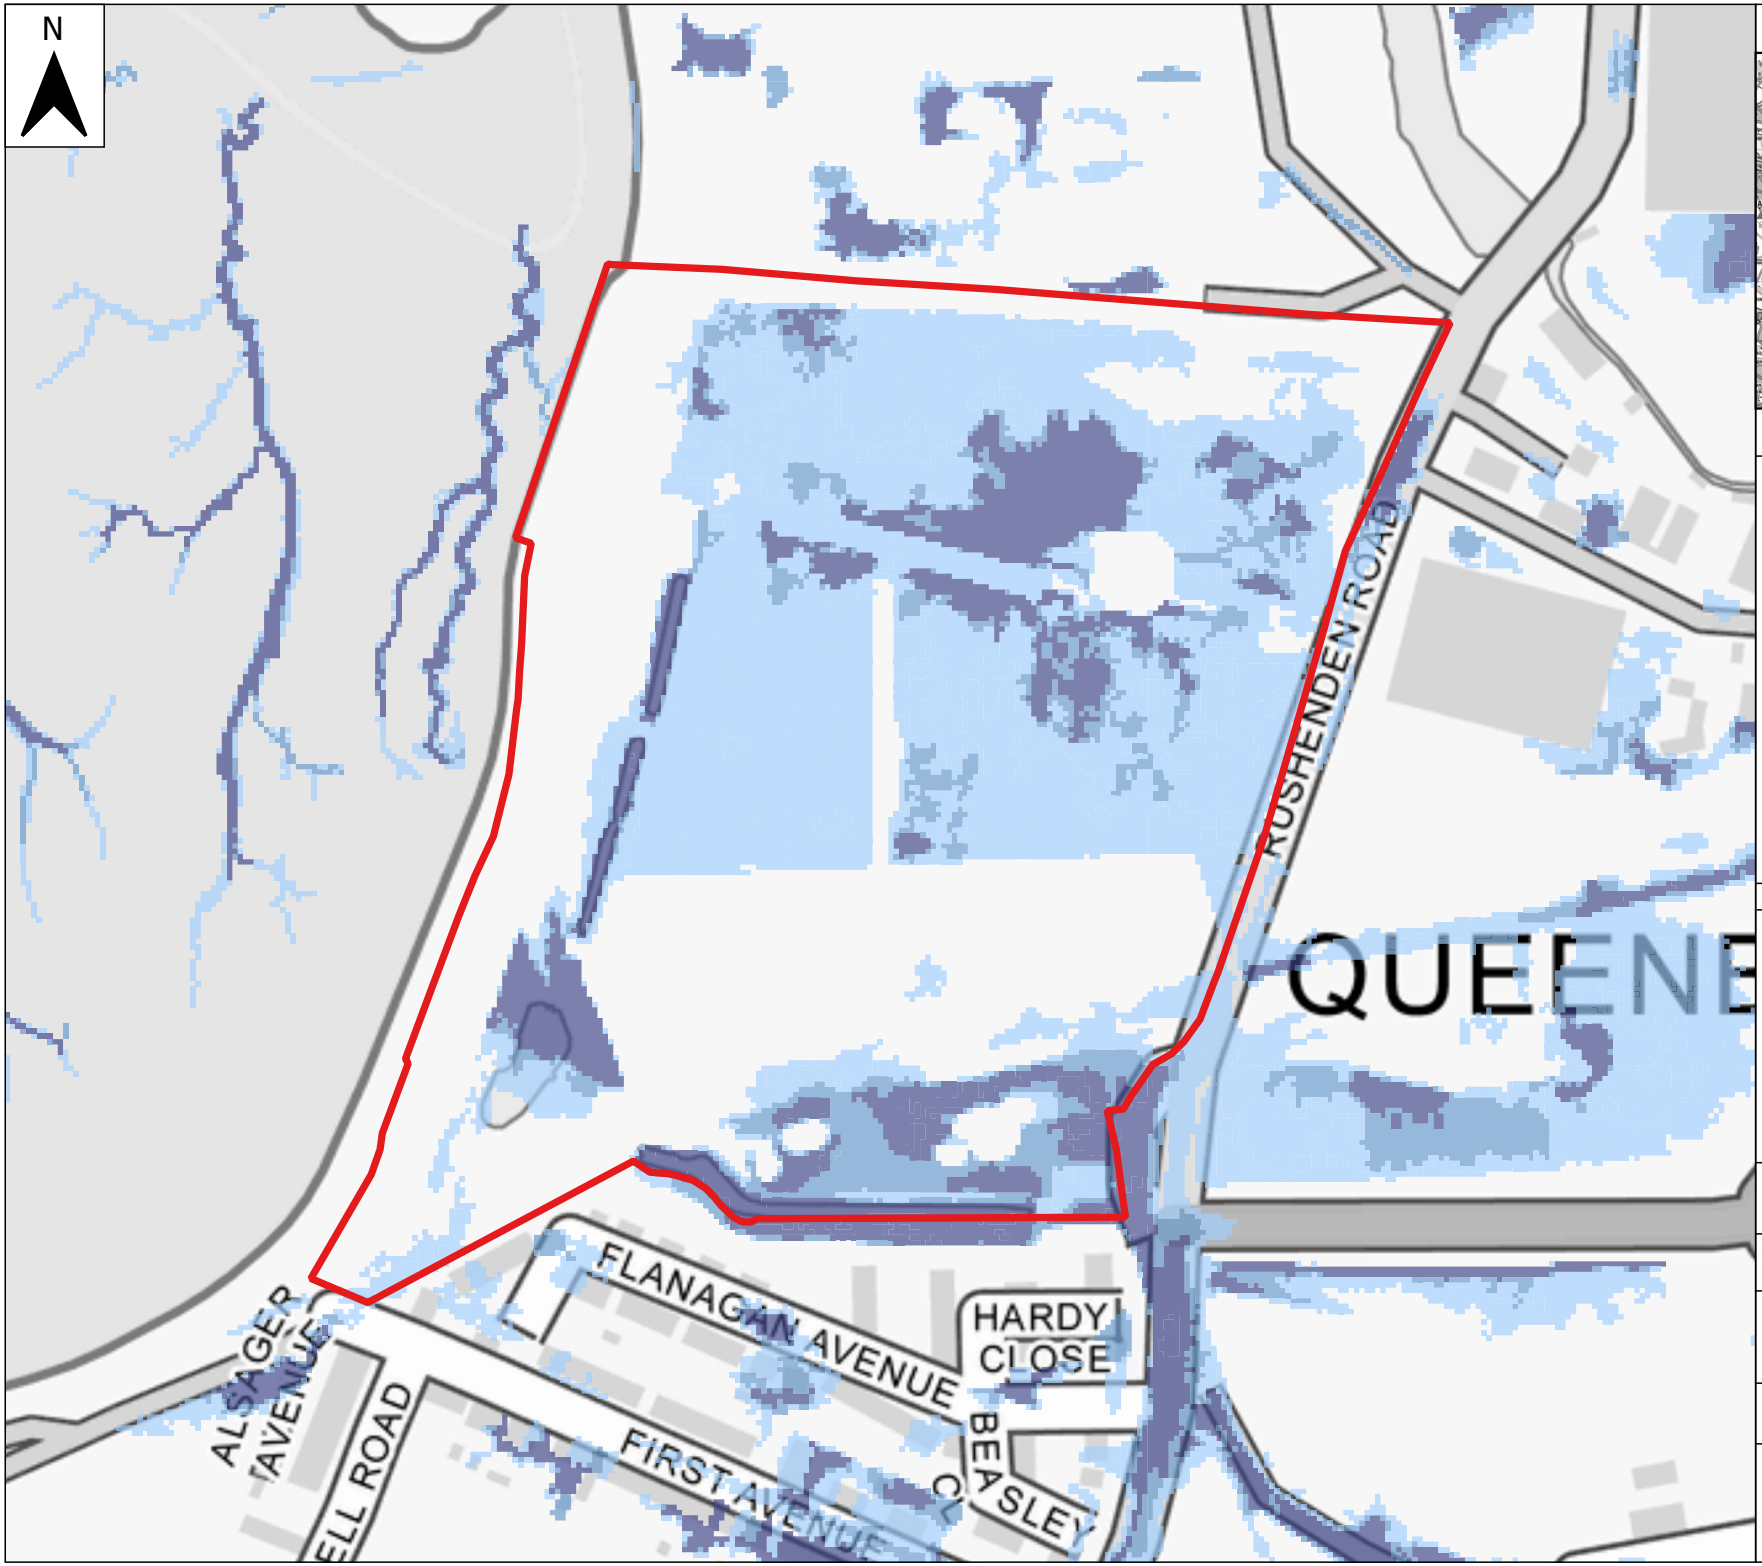

Location Plan

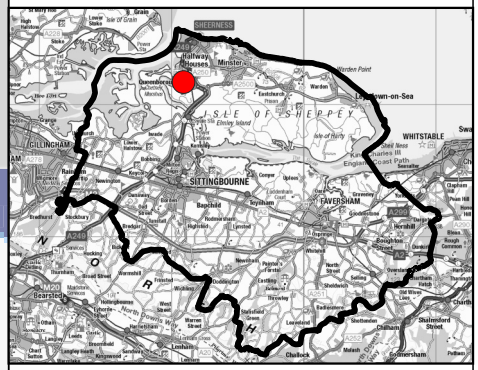

Legend

- Swale Borough Outline
- Site boundary

FMfP - Surface Water Spatial Planning Extents

- 3.3% AEP (1 in 30-year)
- 1% AEP (1 in 100-year)
- 0.1% AEP (1 in 1000-year)

Notes

The Flood Map for Planning Service includes several layers of information. This includes Surface Water Spatial Planning Extents. These datasets show the extent of land at risk of flooding from surface water to a defined annual exceedance probability (AEP) or chance of flooding each year.

These datasets are designed to only give an indication of flood risk to an area of land and are not suitable for showing whether an individual property is at risk of flooding.

0 70 140 m


Contains Ordnance Survey data © Crown copyright and database right 2026. Contains public sector information licensed under the Open Government Licence v3.0.

SWALE BOROUGH COUNCIL
LEVEL 2 SFRA:
SURFACE WATER FLOODING - SHELAA-220


This document is the property of Jeremy Benn Associates Ltd. It shall not be reproduced in whole or in part, nor disclosed to a third party, without the permission of Jeremy Benn Associates Ltd.

JBA consulting

Swale BOROUGH COUNCIL
Making Swale a better place

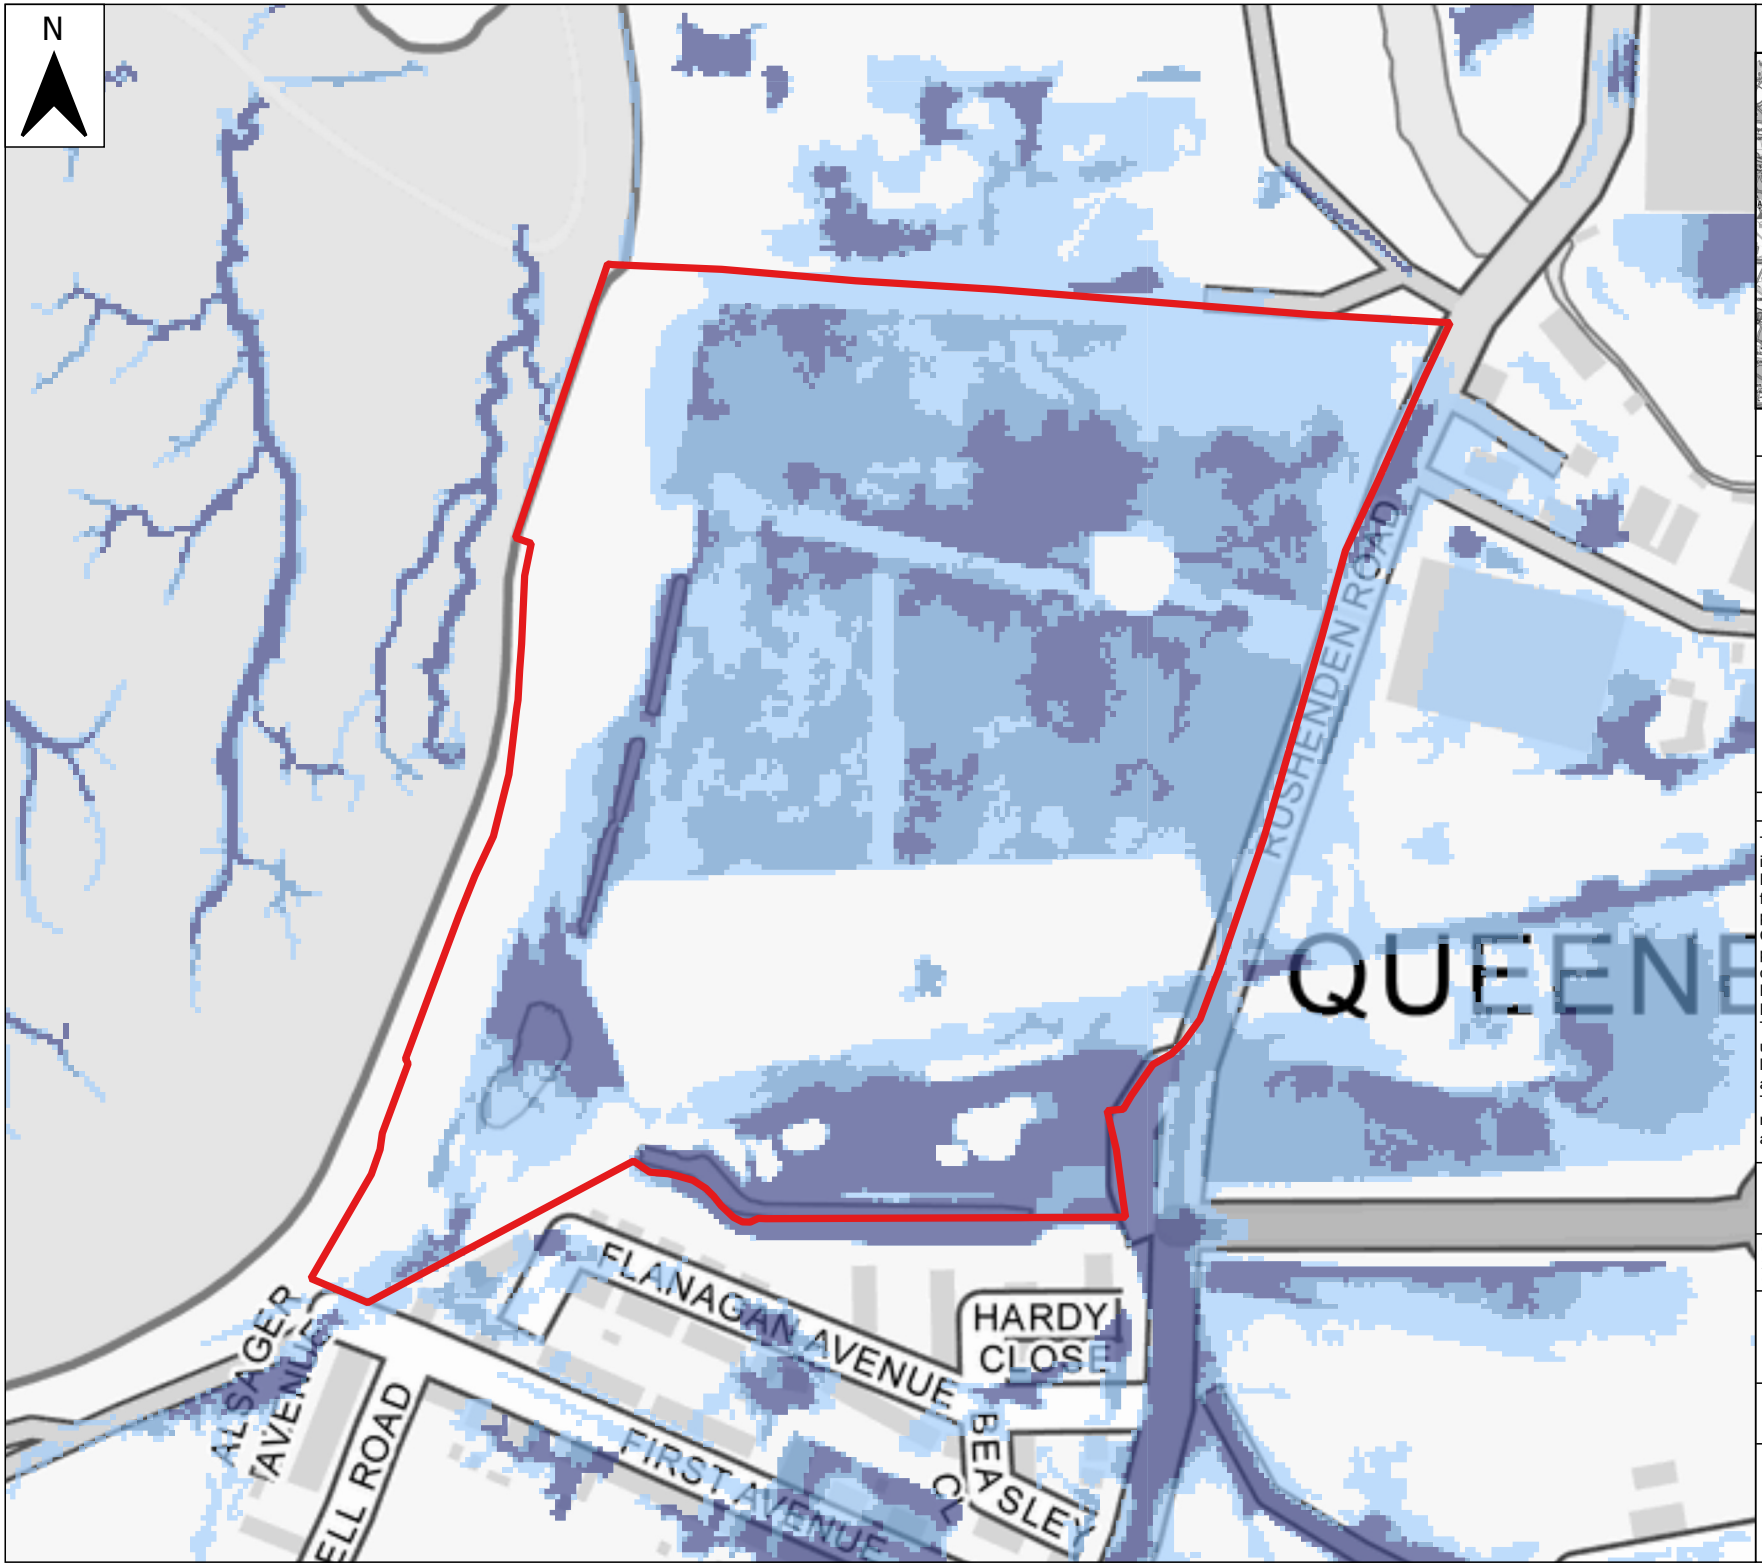

Location Plan

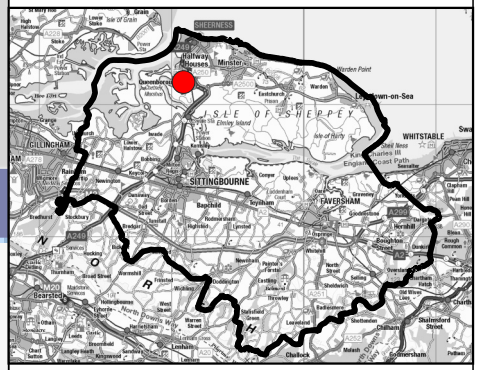

Legend

- Swale Borough Outline
- Site boundary

FMfP - Surface Water Spatial Planning Extents plus climate change

- 3.3% AEP (1 in 30-year) plus CC
- 1% AEP (1 in 100-year) plus CC
- 0.1% AEP (1 in 1000-year) plus CC

Notes

The Flood Map for Planning Service includes several layers of information. This includes Surface Water Spatial Planning Extents. These datasets show the extent of land at risk of flooding from surface water to a defined annual exceedance probability (AEP) or chance of flooding each year.
Climate change scenarios have been produced to indicate the predicted impacts of climate change on future flood risk. The climate change allowances are based on the latest UK Climate Projections (UKCP18) from the Met Office, using the Representative Concentration Pathway (RCP) 8.5.
The 'Upper End' for the 2070s epoch (2061-2125) has been used for the climate change scenarios. We have chosen long-term epochs appropriate to support long-term planning and development decisions.
These datasets are designed to only give an indication of flood risk to an area of land and are not suitable for showing whether an individual property is at risk of flooding.

0 70 140 m


Contains Ordnance Survey data © Crown copyright and database right 2026. Contains public sector information licensed under the Open Government Licence v3.0.

SWALE BOROUGH COUNCIL
LEVEL 2 SFRA:
SURFACE WATER FLOODING PLUS CLIMATE CHANGE - SHELAA-220


This document is the property of Jeremy Benn Associates Ltd. It shall not be reproduced in whole or in part, nor disclosed to a third party, without the permission of Jeremy Benn Associates Ltd.

JBA consulting

Swale BOROUGH COUNCIL
Making Swale a better place

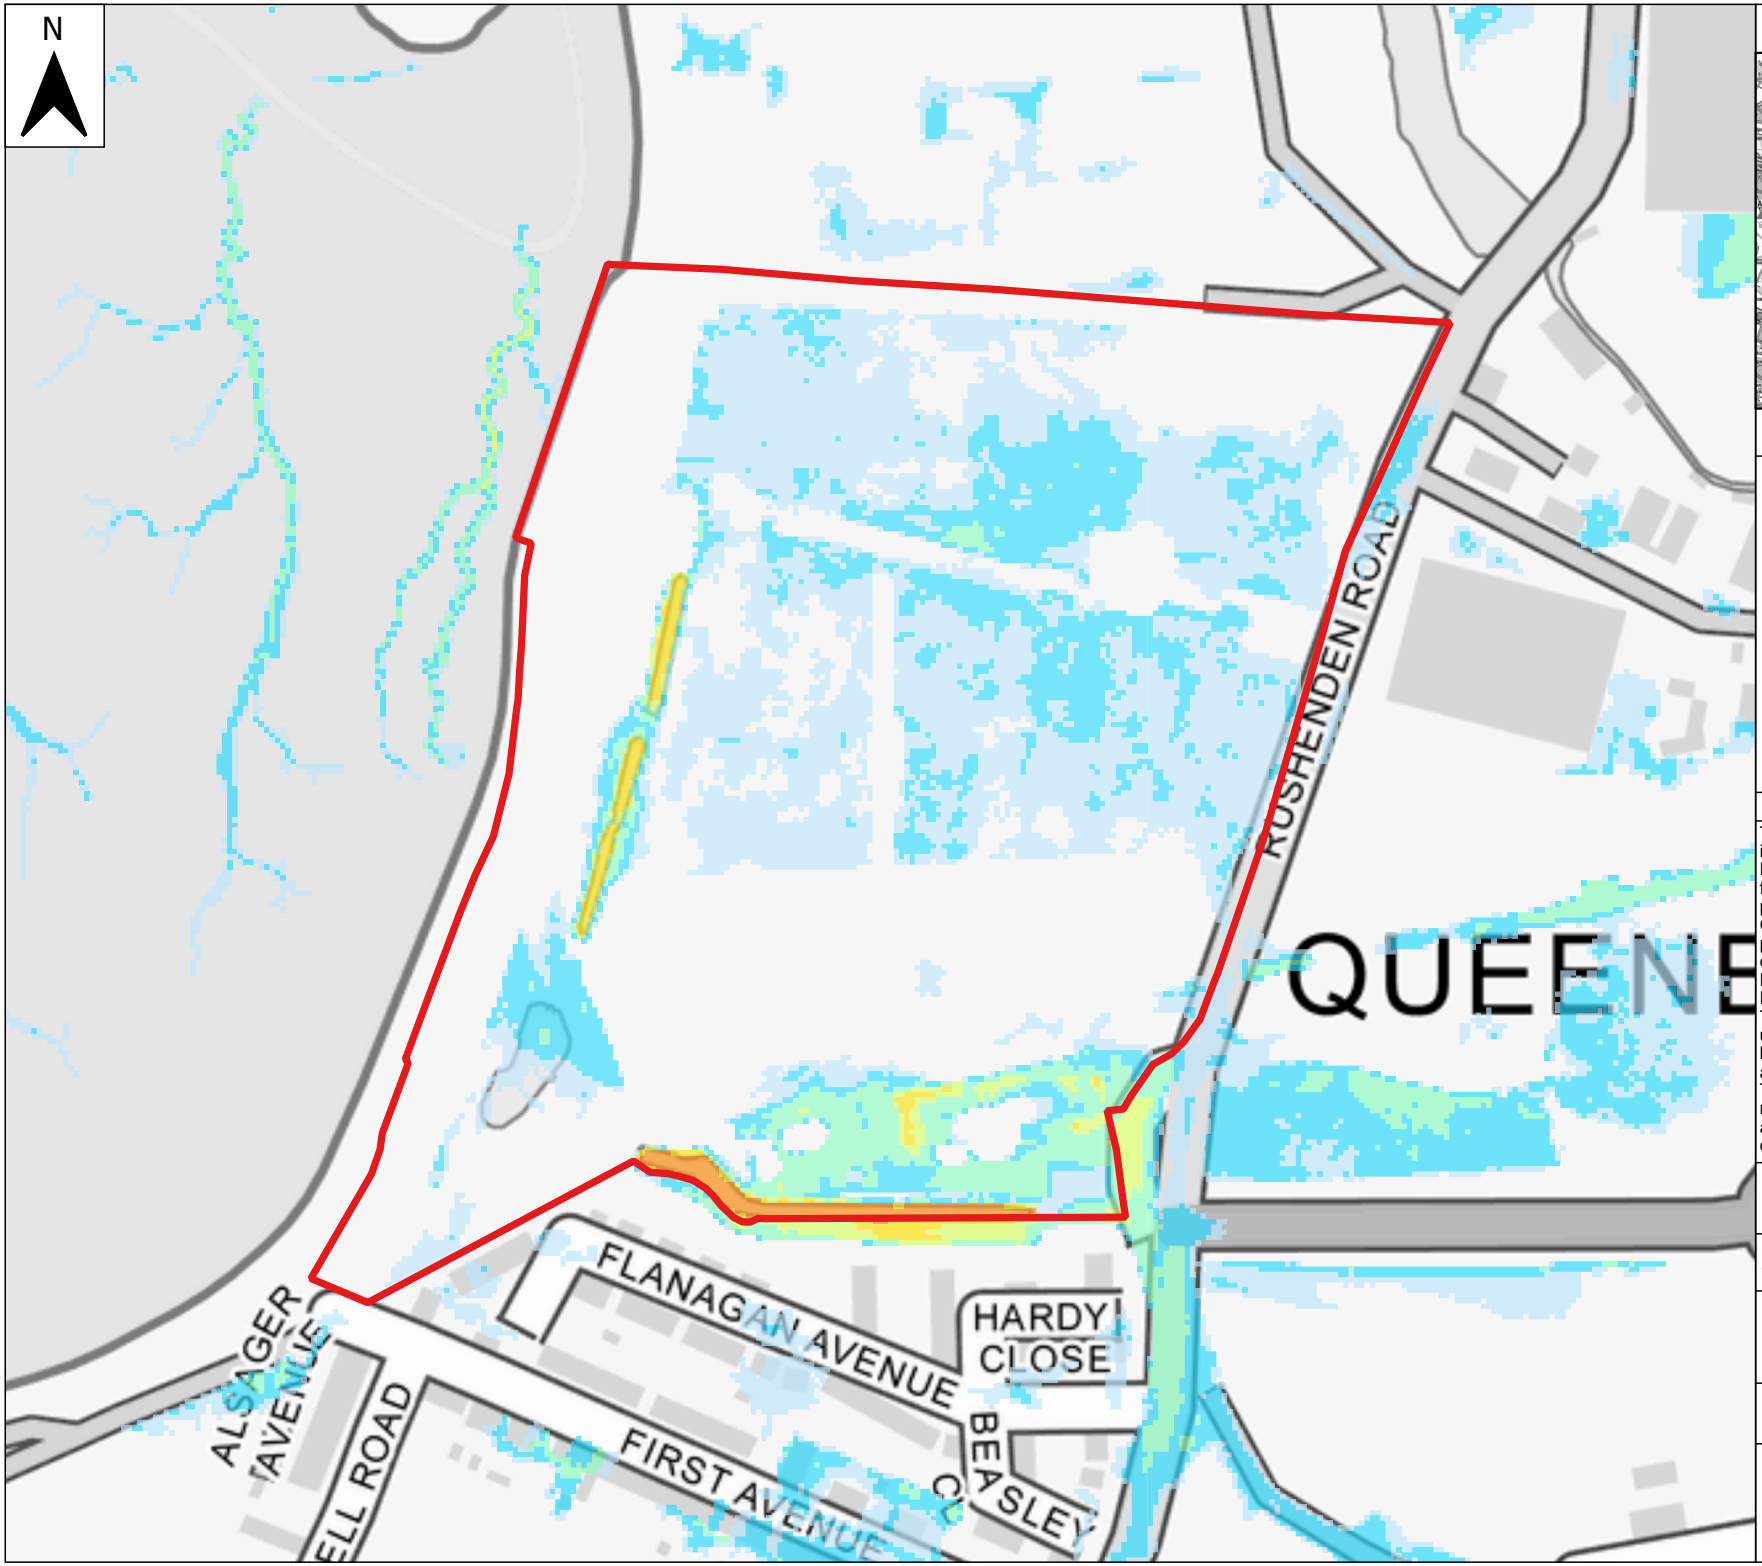

Location Plan

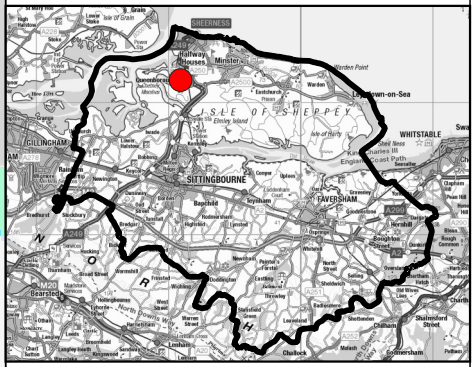

Legend

- Swale Borough Outline
- Site boundary

FMfP Surface Water Spatial Planning Depths
1% AEP (1 in 100-year) plus climate change

- <150mm
- 150-300mm
- 300-600mm
- 600-900mm
- 900-1200mm
- 1200-2300mm
- >2300mm

Notes

The Flood Map for Planning Service includes several layers of information. This includes Surface Water Spatial Planning Extents. These datasets show the extent of land at risk of flooding from surface water to a defined annual exceedance probability (AEP) or chance of flooding each year.
Climate change scenarios have been produced to indicate the predicted impacts of climate change on future flood risk. The climate change allowances are based on the latest UK Climate Projections (UKCP18) from the Met Office, using the Representative Concentration Pathway (RCP) 8.5.
The 'Upper End' for the 2070s epoch (2061-2125) has been used for the climate change scenarios. We have chosen long-term epochs appropriate to support long-term planning and development decisions.
These datasets are designed to only give an indication of flood risk to an area of land and are not suitable for showing whether an individual property is at risk of flooding. This is because we cannot know all the details about each property.

0 70 140 m


Contains Ordnance Survey data © Crown copyright and database right 2026. Contains public sector information licensed under the Open Government Licence v3.0.

SWALE BOROUGH COUNCIL
LEVEL 2 SFRA:
SURFACE WATER FLOODING PLUS CLIMATE CHANGE DEPTHS - SHELAA-220


This document is the property of Jeremy Benn Associates Ltd. It shall not be reproduced in whole or in part, nor disclosed to a third party, without the permission of Jeremy Benn Associates Ltd.

JBA consulting

Swale BOROUGH COUNCIL
Making Swale a better place

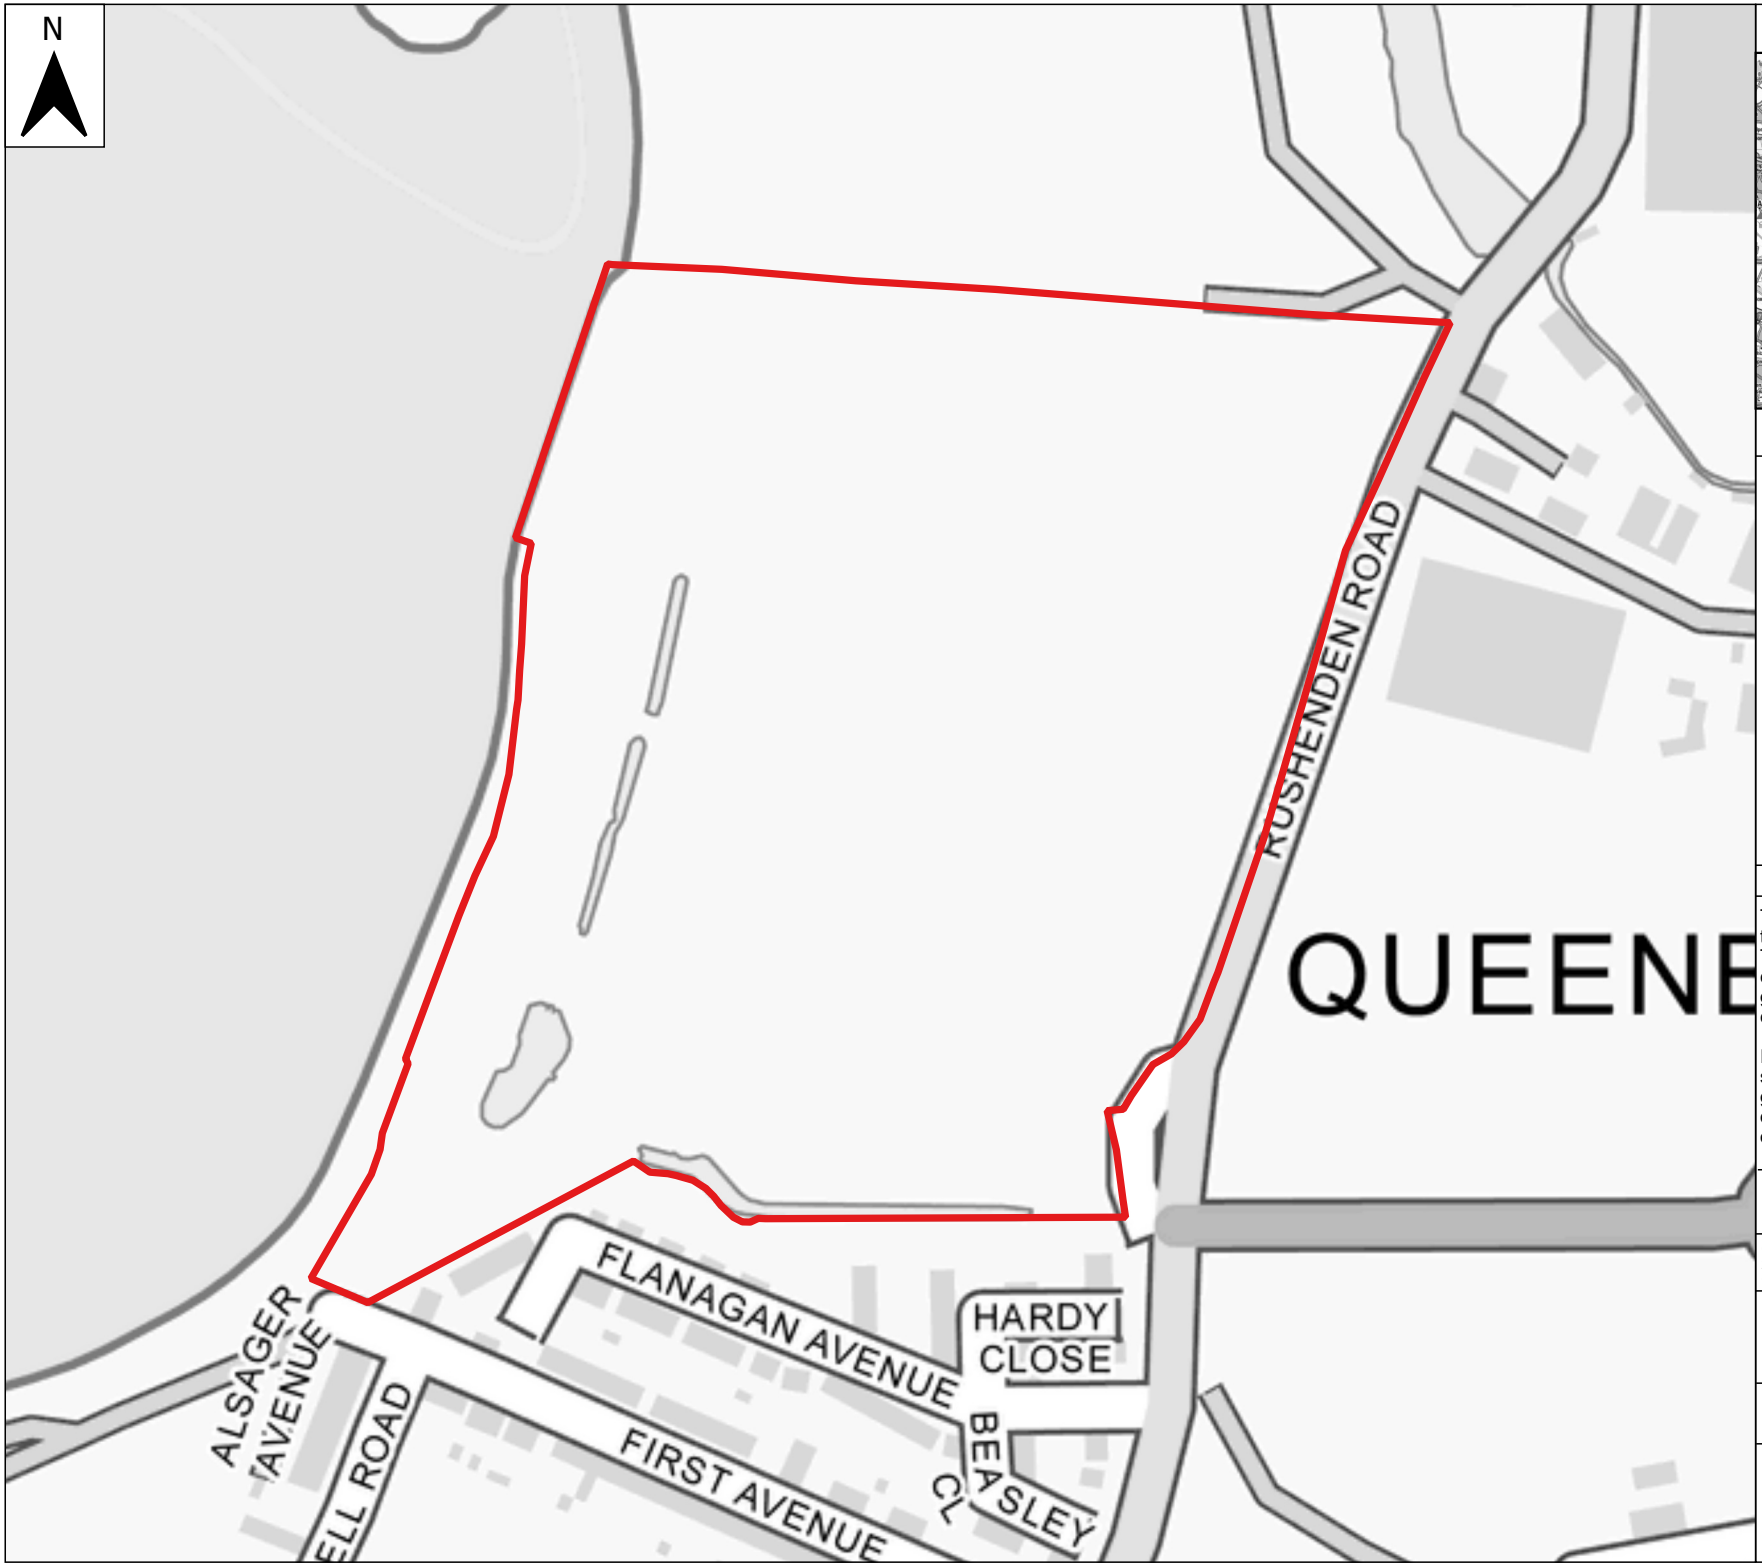

Location Plan

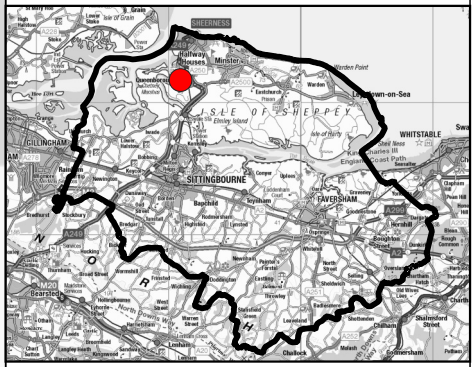

Legend

- Swale Borough Outline
- Site boundary

JBA Groundwater Flood Map Depths

- Groundwater levels are either at or very near (within 0.025m of) the ground surface.
- Groundwater levels are between 0.025m and 0.5m below the ground surface.
- Groundwater levels are between 0.5m and 5m below the ground surface.
- Groundwater levels are at least 5m below the ground surface.
- Low risk.

Notes

The modelled groundwater levels are not predictions of typical groundwater levels, rather they are flood levels. The 5m resolution JBA Groundwater Flood Map categorises the head difference (m) between the predicted groundwater levels and the surface level into five feature classes based on the 100-year flood model outputs.

It should be noted that the JBA Groundwater Flood Map is suitable for general broad-scale assessment of the groundwater flood hazard in an area, but is not explicitly designed for the assessment of flood hazard at the scale of a single property.

0 70 140 m

Contains Ordnance Survey data © Crown copyright and database right 2026. Contains public sector information licensed under the Open Government Licence v3.0.

SWALE BOROUGH COUNCIL
LEVEL 2 SFRA:
JBA GROUNDWATER FLOOD MAP - SHELAA-220


This document is the property of Jeremy Benn Associates Ltd. It shall not be reproduced in whole or in part, nor disclosed to a third party, without the permission of Jeremy Benn Associates Ltd.

JBA consulting

Swale BOROUGH COUNCIL
Making Swale a better place



Location Plan

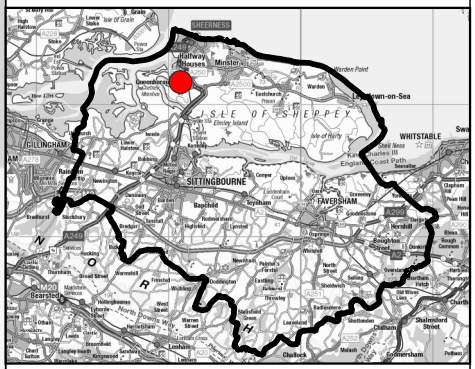

Legend

- Swale Borough Outline
- Site boundary

Environment Agency Reservoir Flood Extents

- Dry Day
- Wet Day

Notes

The risk of inundation due to reservoir breach or failure of reservoirs within the area has been mapped using the outlines available from the Risk of Flooding from Reservoir dataset, made available by the Environment Agency. The Environment Agency dataset includes areas of sea flooding.

0 70 140 m


Contains Ordnance Survey data © Crown copyright and database right 2026. Contains public sector information licensed under the Open Government Licence v3.0.

SWALE BOROUGH COUNCIL
LEVEL 2 SFRA:
RISK OF FLOODING FROM RESERVOIRS - SHELAA-220


This document is the property of Jeremy Benn Associates Ltd. It shall not be reproduced in whole or in part, nor disclosed to a third party, without the permission of Jeremy Benn Associates Ltd.

JBA consulting

Swale BOROUGH COUNCIL
Making Swale a better place

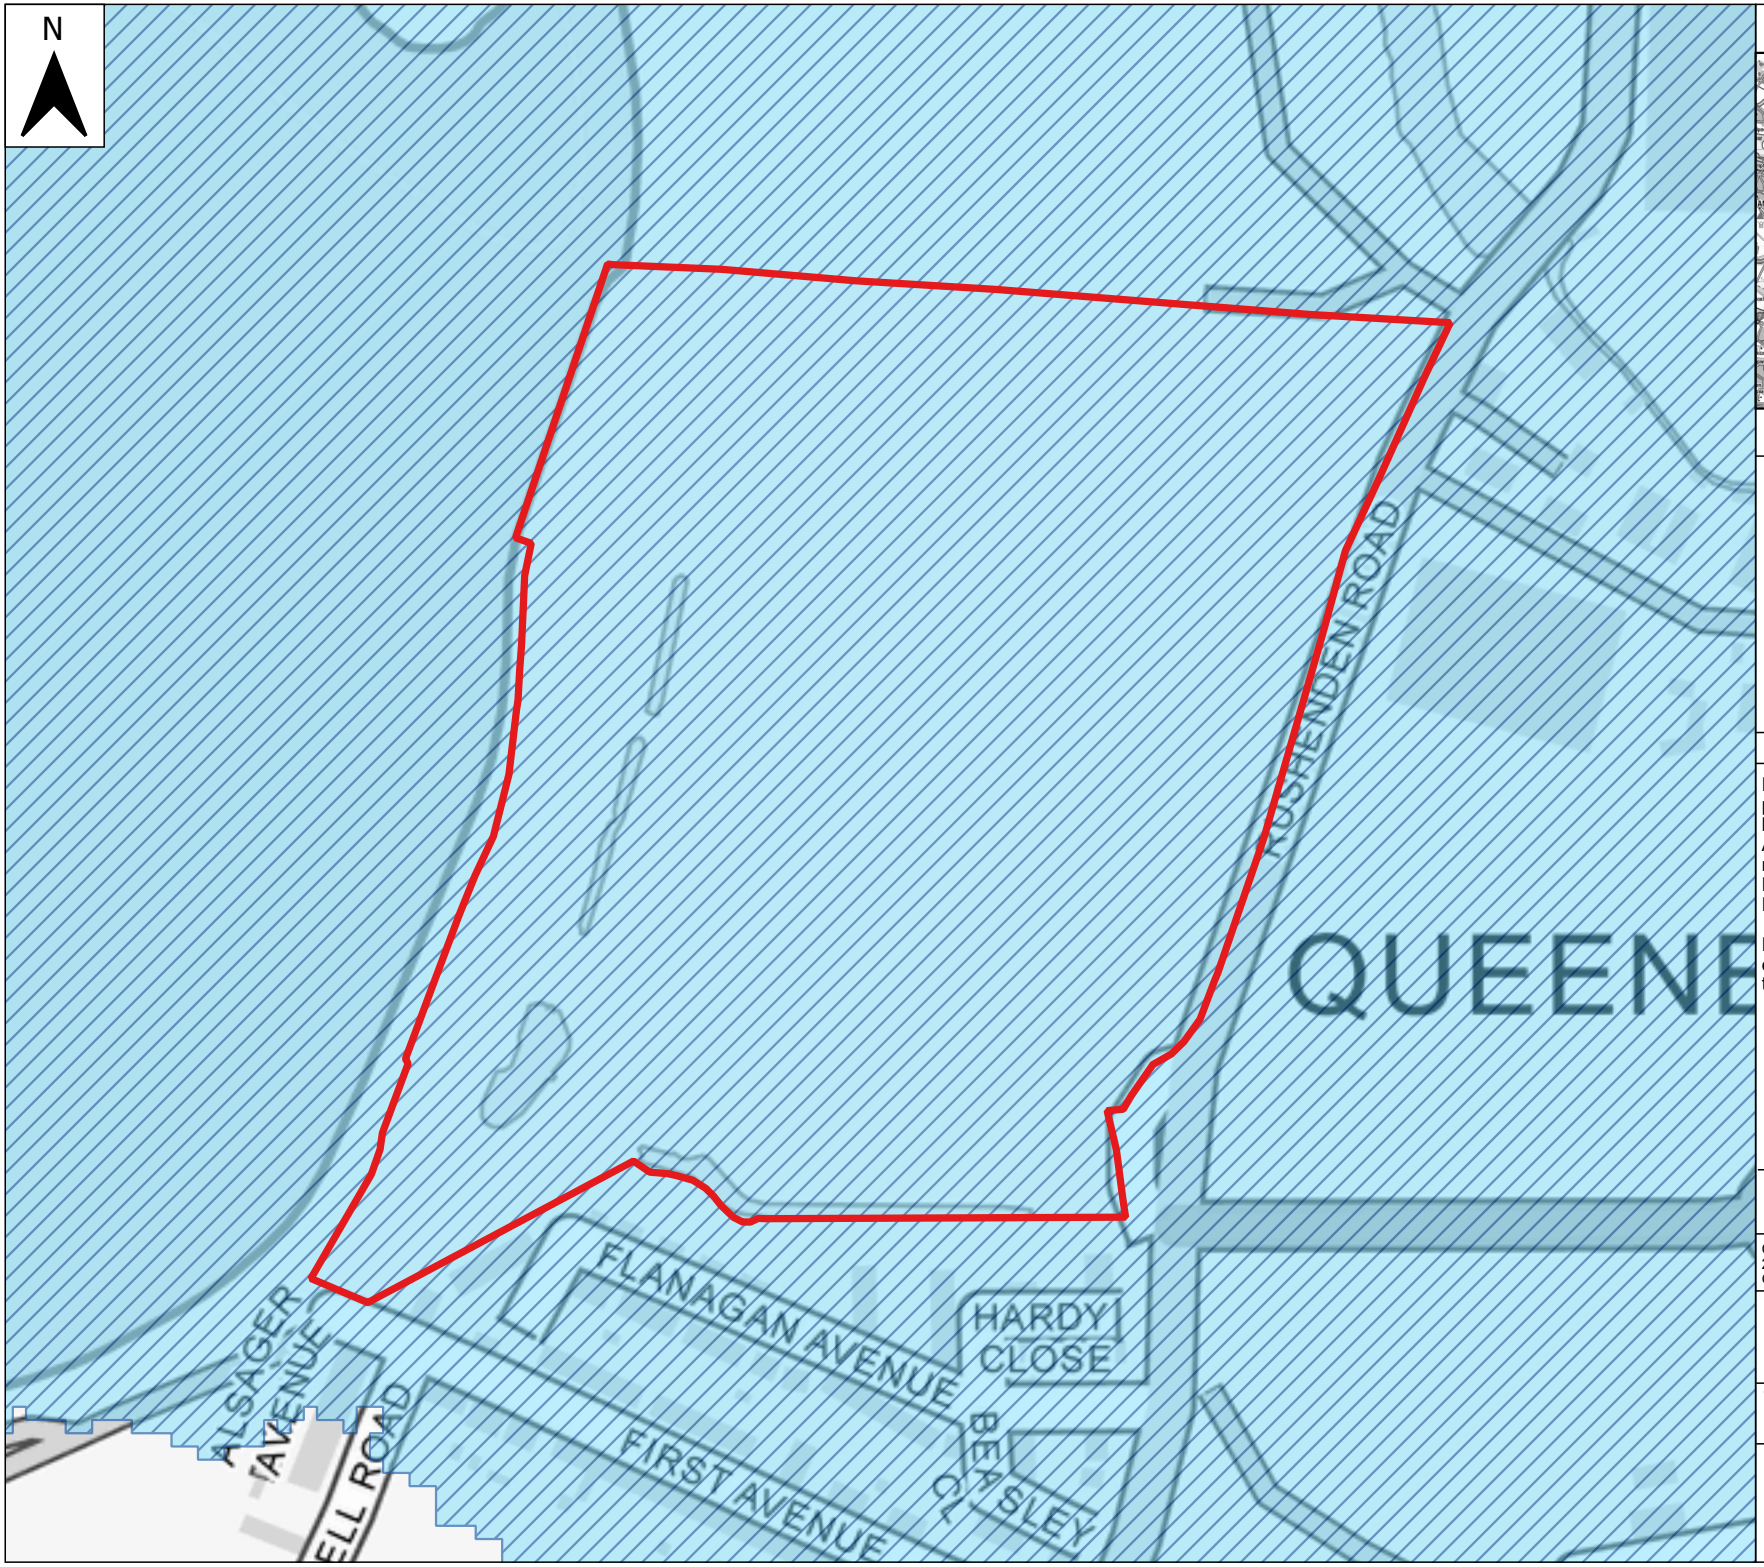

Location Plan

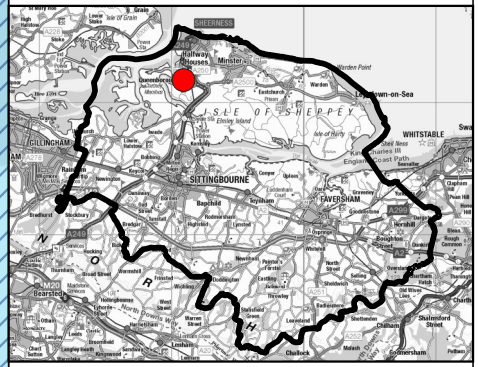

Legend

- Swale Borough Outline
- Site boundary

Environment Agency Flood Warning and Alerts

- Flood Alert Area
- Flood Warning Area

Notes

Flood Alerts are used by the Environment Agency to warn people of the possibility of flooding and encourage them to be alert, stay vigilant and make early preparations. Flood Alerts are issued earlier than a flood warning to give notice of the possibility of flooding but before the Environment Agency are fully confident that flooding in Flood Warning Areas is expected.

Flood Warnings warn people of expected flooding and encourage them to take action to protect themselves and their property.

0 70 140 m


Contains Ordnance Survey data © Crown copyright and database right 2026. Contains public sector information licensed under the Open Government Licence v3.0.

SWALE BOROUGH COUNCIL
LEVEL 2 SFRA:
ENVIRONMENT AGENCY FLOOD WARNINGS AND ALERTS - SHELAA-220


This document is the property of Jeremy Benn Associates Ltd. It shall not be reproduced in whole or in part, nor disclosed to a third party, without the permission of Jeremy Benn Associates Ltd.

JBA consulting

Swale BOROUGH COUNCIL
Making Swale a better place

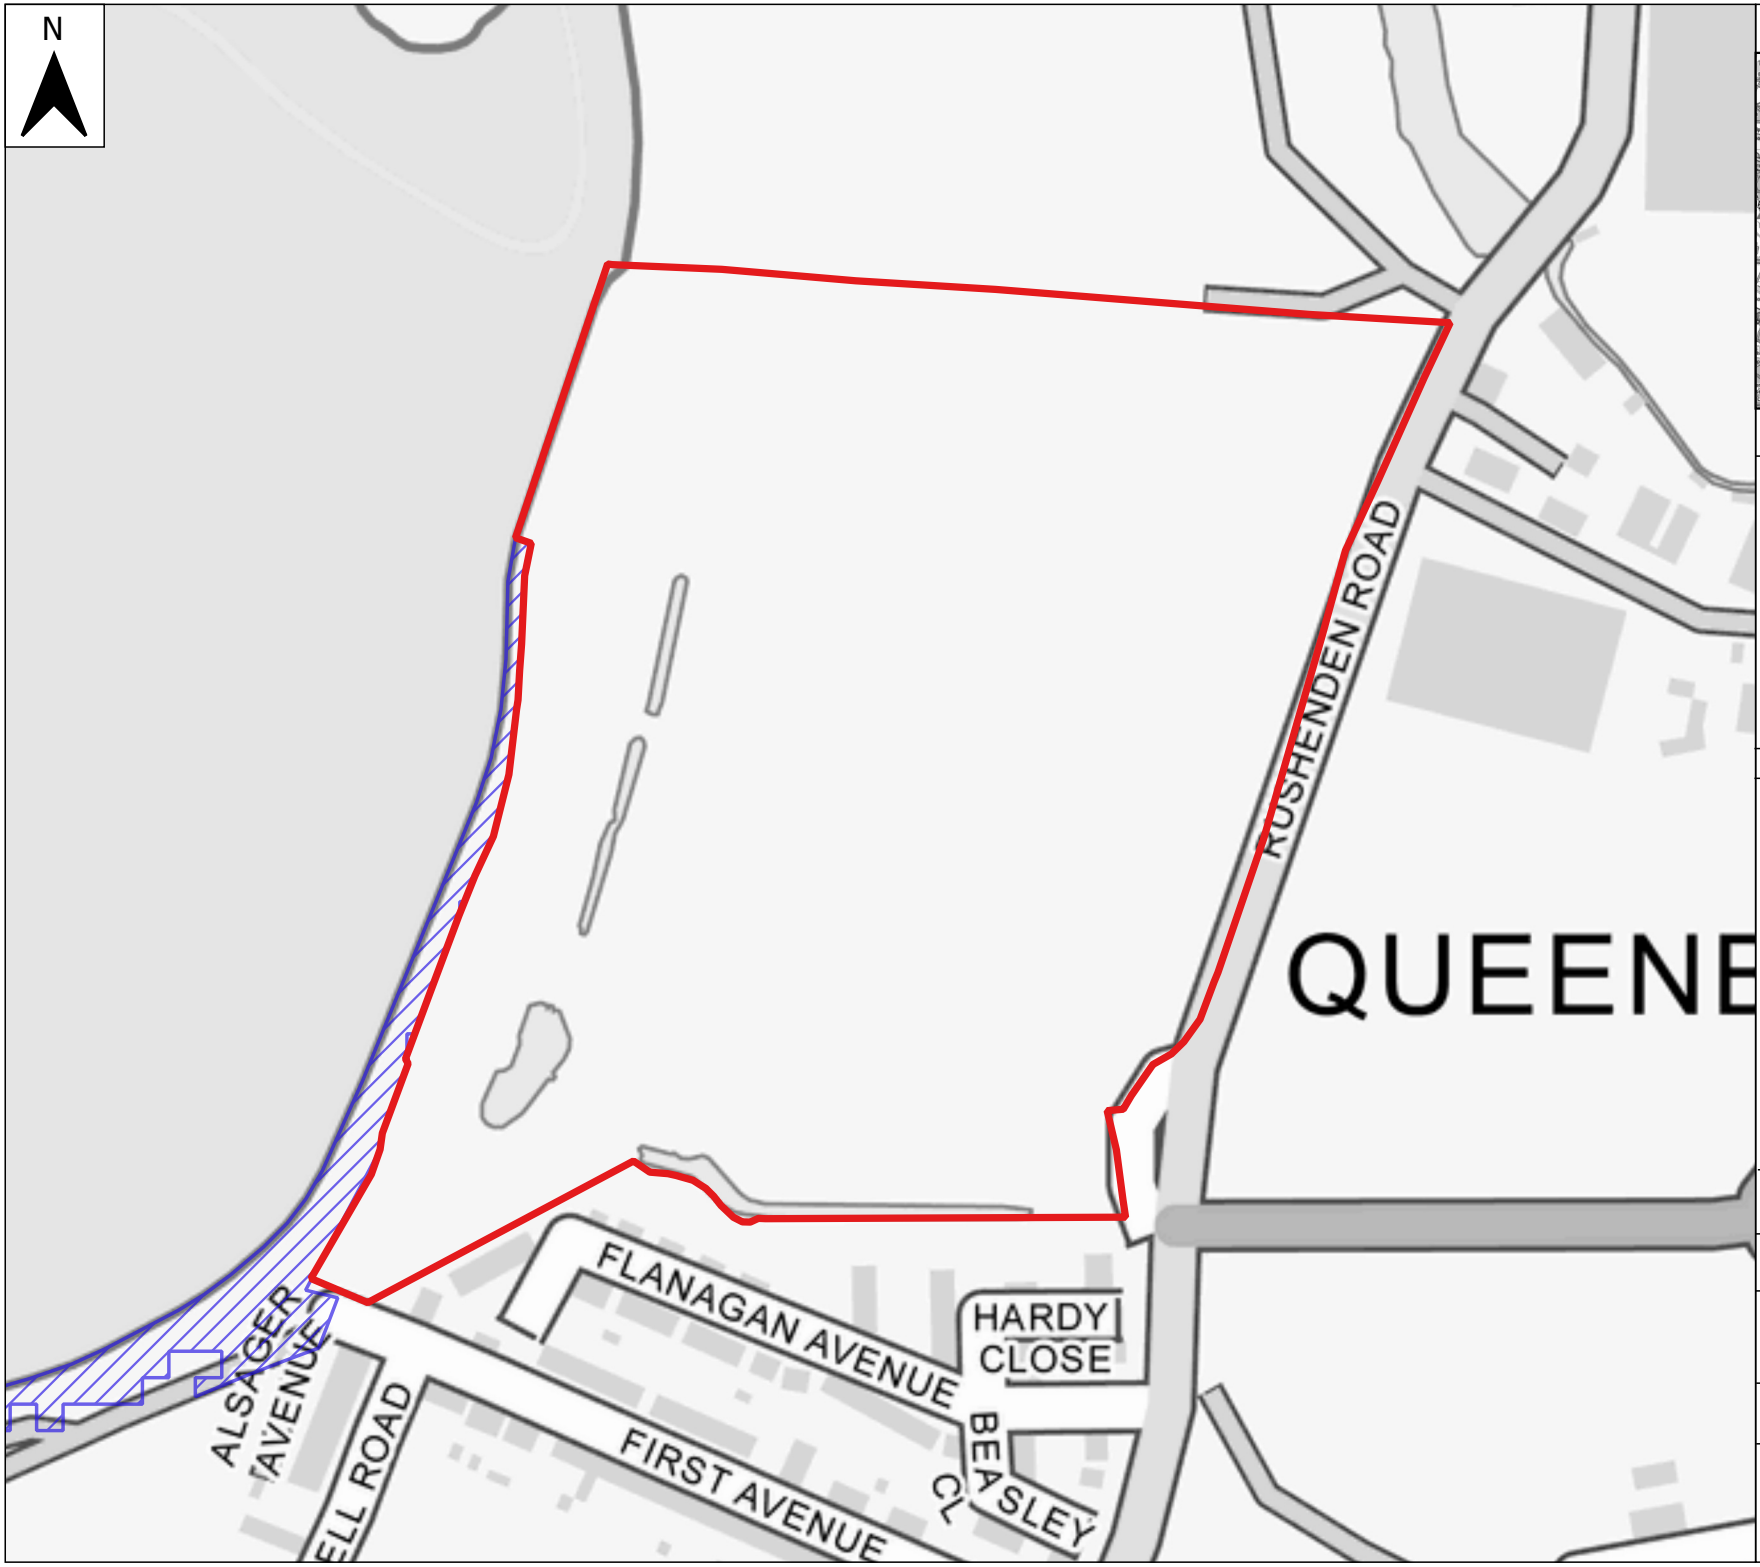

Location Plan

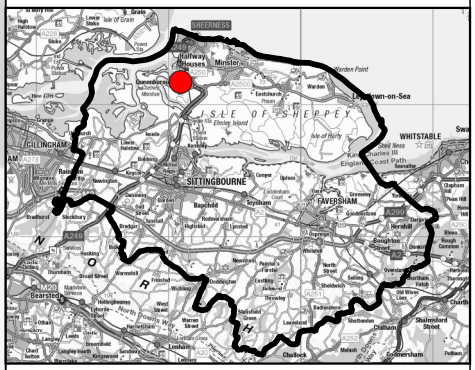

Legend

- Swale Borough Outline
- Site boundary

Coastal Change Management Area

- Erosion Zone 1
- Erosion Zone 2
- North Kent Coast model Defended 3.3% AEP (1 in 30-year) 2125 Upper End

Notes

The North Kent Coast 2125 Upper End defended 3.3% AEP flood extent has been used to identify land which is predicted to be at risk of inundation by 2125.
The National Coastal Erosion Risk Map (NCERM) Shoreline Management Plan (SMP) 2055 plus 95% (Upper End) climate change allowance and 2105 plus 95% (Upper End) climate change allowance datasets have been used to identify the areas where the whole period covered by the SMP is No Active Intervention or Managed Realignment and there is predicted to be a coastal erosion risk over the next 100 years. It is noted that the SMP considers the year 2105 and does not consider 100 years into the future. However, this is the best readily available information.
Using the two epochs, the CCMA is divided into two separate zones:
• Erosion Zone 1 (defined as the Environment Agency's Coastal Erosion Climate Change (Upper End) to 2055 zone; and
• Erosion Zone 2 (defined as the Environment Agency's Coastal Erosion Climate Change (Upper End) to 2105 zone).

0 70 140 m


Contains Ordnance Survey data © Crown copyright and database right 2026. Contains public sector information licensed under the Open Government Licence v3.0.

SWALE BOROUGH COUNCIL
LEVEL 2 SFRA:
COASTAL CHANGE MANAGEMENT AREAS - SHELAA-220


This document is the property of Jeremy Benn Associates Ltd. It shall not be reproduced in whole or in part, nor disclosed to a third party, without the permission of Jeremy Benn Associates Ltd.

JBA consulting

Swale BOROUGH COUNCIL
Making Swale a better place

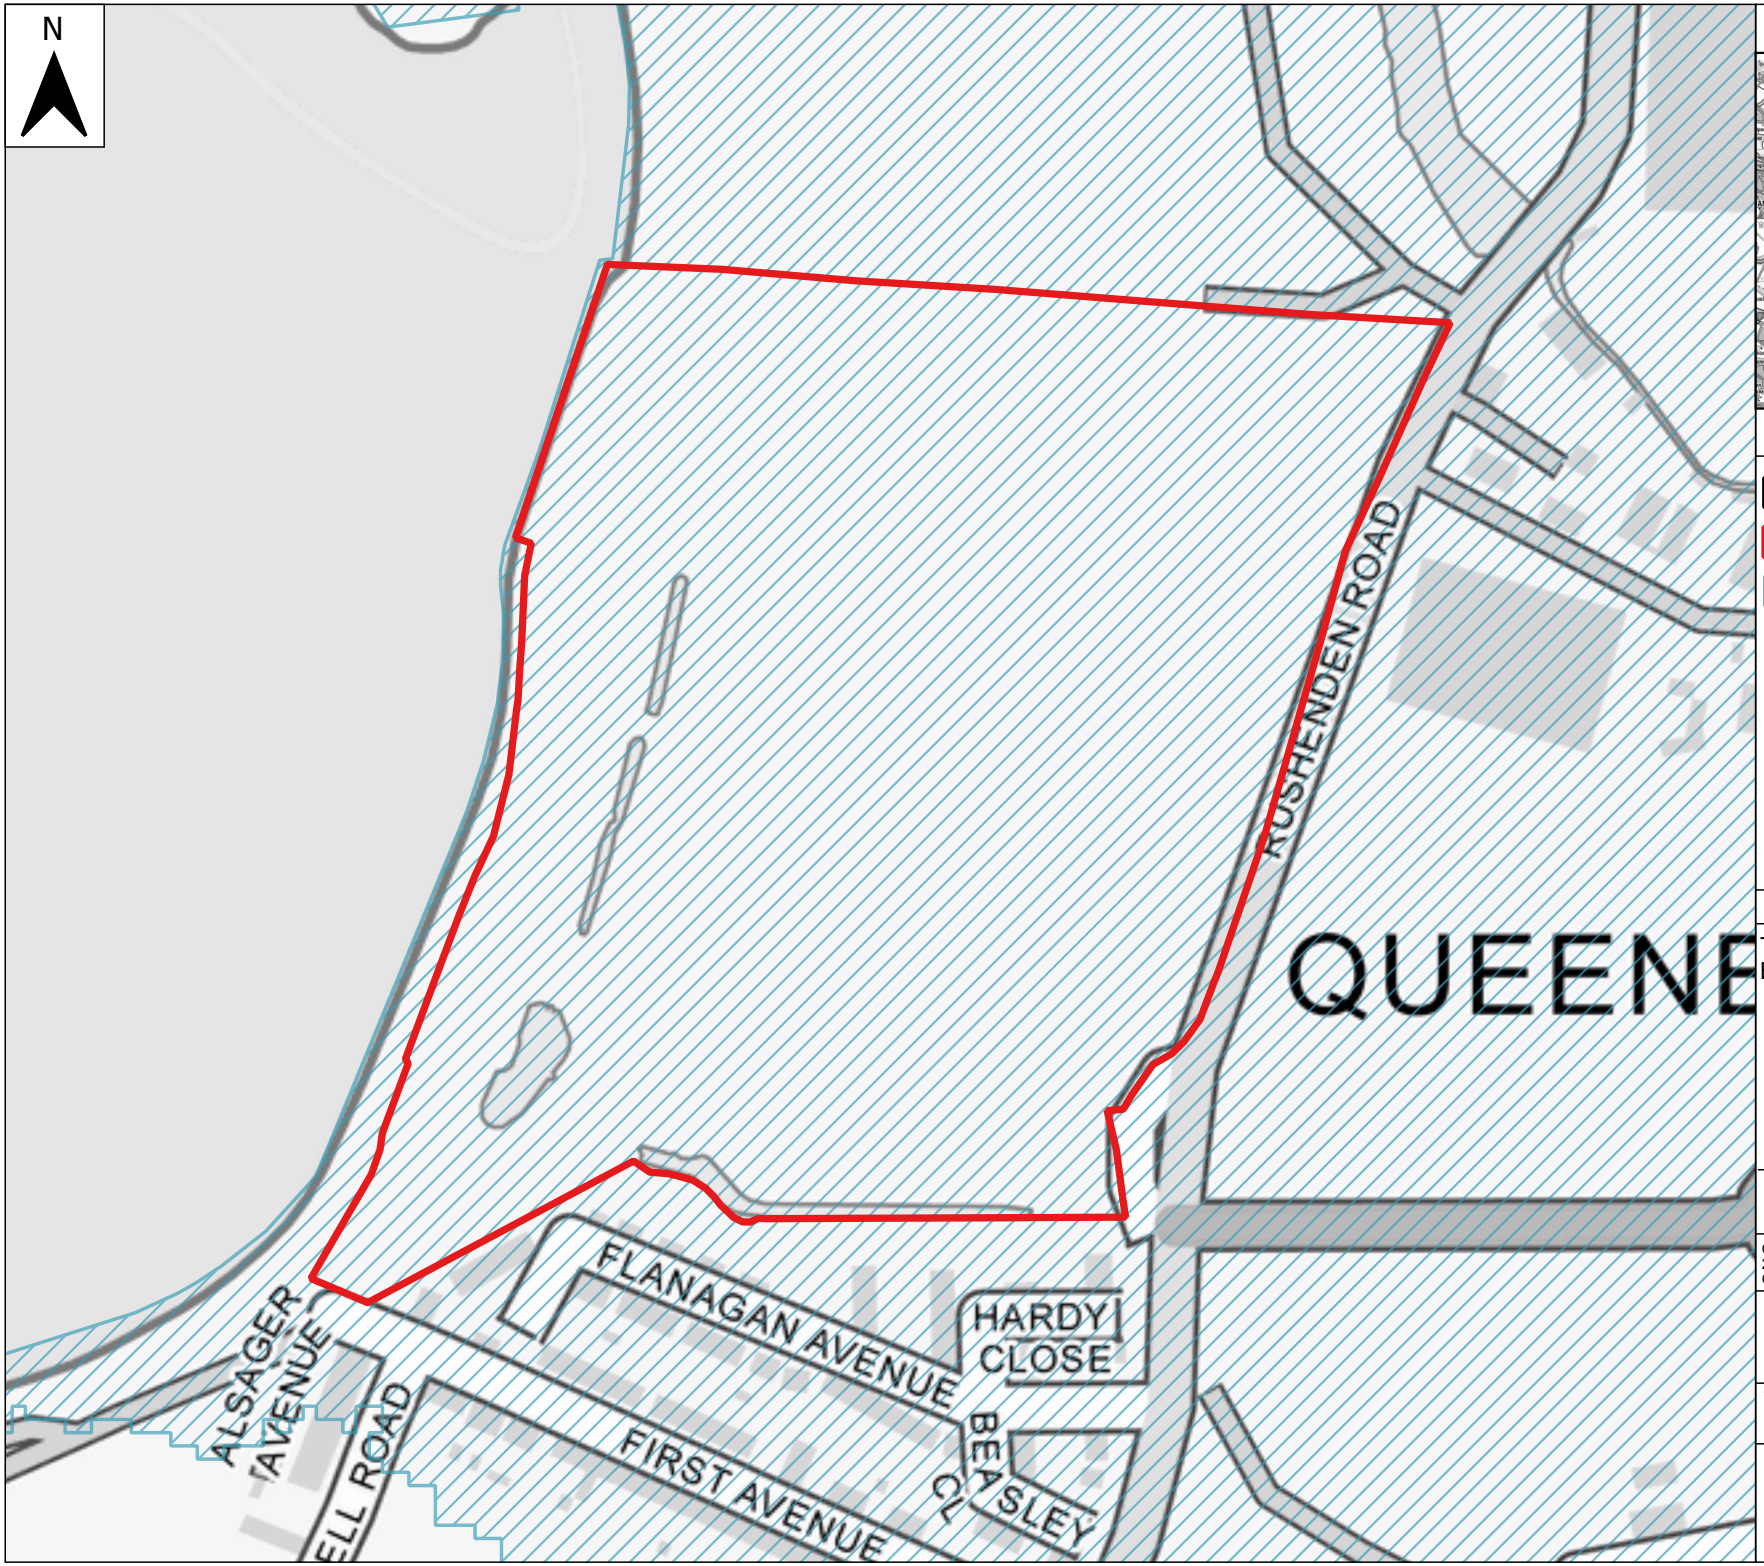

Location Plan

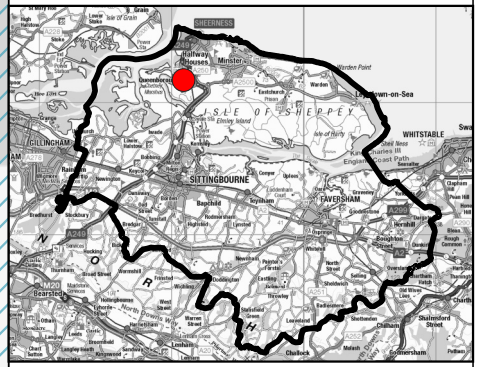

Legend

- Swale Borough Outline
- Site boundary
- MEAS Benefit Area with a Hold the Line policy

Notes

The Medway Estuary and Swale Strategy Benefit Areas with a Hold the Line policy

0 70 140 m

Contains Ordnance Survey data © Crown copyright and database right 2026. Contains public sector information licensed under the Open Government Licence v3.0.

SWALE BOROUGH COUNCIL
LEVEL 2 SFRA:
MEAS BENFIT AREA - SHELAA-220

This document is the property of Jeremy Benn Associates Ltd. It shall not be reproduced in whole or in part, nor disclosed to a third party, without the permission of Jeremy Benn Associates Ltd.

JBA consulting


Swale BOROUGH COUNCIL
Making Swale a better place

www.jbaconsulting.com



Our Offices

Bristol
Coleshill
Cork
Doncaster
Dublin
Edinburgh
Exeter
Glasgow
Haywards Heath
Leeds
Limerick
Newcastle
Newport
Peterborough
Portsmouth
Saltaire
Skipton
Tadcaster
Thirsk
Wallingford
Warrington

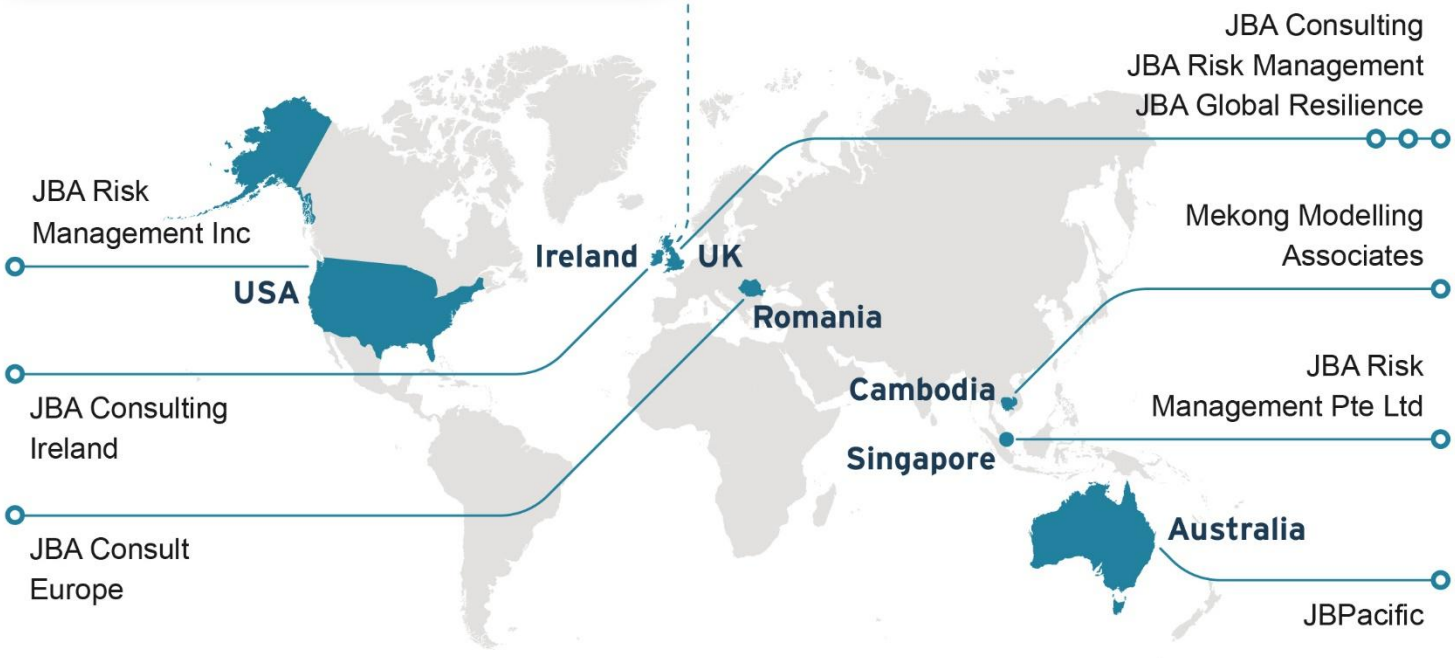

Registered Office
1 Broughton Park
Old Lane North
Broughton
SKIPTON
North Yorkshire
BD23 3FD
United Kingdom

+44(0) 1756 799919
info@jbaconsulting.com
www.jbaconsulting.com

Follow us on

Jeremy Benn
Associates Limited
Registered in
England
3246693

JBA Group Ltd is
certified to
ISO 9001:2015
ISO 14001:2015
ISO 27001:2022
ISO 45001:2018